



### DWDM-SFP25G-41.35-10-OPC

Cisco® DWDM-SFP25G-41.35-10 compatible TAA 25GBase-DWDM Channel 45 SFP28 Transceiver (SMF, 1541.35nm, 10km, LC, DOM)

#### Features

- SFF-8432 and SFF-8472 Compliance
- Duplex LC Connector
- Single-mode Fiber
- Commercial Temperature 0 to 70 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



#### Applications:

- 25GBase-LR Ethernet
- Access, Metro and Enterprise

#### Product Description

This Cisco® DWDM-SFP25G-41.35-10 compatible SFP28 transceiver provides 25GBase-DWDM throughput up to 10km over single-mode fiber (SMF) using a wavelength of 1541.35nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Cisco® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products."



## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

## Wavelength Guide (100GHz ITU Channels)

| Channel | Wavelength (nm) | Frequency (THZ) | Channel | Wavelength (nm) | Frequency (THZ) |
|---------|-----------------|-----------------|---------|-----------------|-----------------|
| 21      | 1560.61         | 192.1           | 41      | 1544.53         | 194.1           |
| 22      | 1559.79         | 192.2           | 42      | 1543.73         | 194.2           |
| 23      | 1558.98         | 192.3           | 43      | 1542.94         | 194.3           |
| 24      | 1558.17         | 192.4           | 44      | 1542.14         | 194.4           |
| 25      | 1557.36         | 192.5           | 45      | 1541.35         | 194.5           |
| 26      | 1556.55         | 192.6           | 46      | 1540.56         | 194.6           |
| 27      | 1555.75         | 192.7           | 47      | 1539.77         | 194.7           |
| 28      | 1554.94         | 192.8           | 48      | 1538.98         | 194.8           |
| 29      | 1554.13         | 192.9           | 49      | 1538.19         | 194.9           |
| 30      | 1553.33         | 193.0           | 50      | 1537.4          | 195.0           |
| 31      | 1552.52         | 193.1           | 51      | 1536.61         | 195.1           |
| 32      | 1551.72         | 193.2           | 52      | 1535.82         | 195.2           |
| 33      | 1550.92         | 193.3           | 53      | 1535.04         | 195.3           |
| 34      | 1550.12         | 193.4           | 54      | 1534.25         | 195.4           |
| 35      | 1549.32         | 193.5           | 55      | 1533.47         | 195.5           |
| 36      | 1548.51         | 193.6           | 56      | 1532.68         | 195.6           |
| 37      | 1547.72         | 193.7           | 57      | 1531.9          | 195.7           |
| 38      | 1546.92         | 193.8           | 58      | 1531.12         | 195.8           |
| 39      | 1546.12         | 193.9           | 59      | 1530.33         | 195.9           |
| 40      | 1545.32         | 194.0           | 60      | 1529.55         | 196.0           |

## Absolute Maximum Ratings

| Parameter                  | Symbol | Min.  | Typ. | Max.  | Unit | Notes |
|----------------------------|--------|-------|------|-------|------|-------|
| Maximum Supply Voltage     | Vcc    | -0.3  |      | 4.0   | V    |       |
| Storage Temperature        | TS     | -40   |      | 85    | °C   |       |
| Operating Case Temperature | Tc     | 0     |      | 70    | °C   |       |
| Relative Humidity          | RH     | 0     |      | 85    | %    |       |
| Data Rate                  | BR     | 24.33 |      | 25.78 | Gbps |       |

## Electrical Characteristics

| Parameter                          | Symbol                    | Min.            | Typ. | Max.                 | Unit  | Notes |
|------------------------------------|---------------------------|-----------------|------|----------------------|-------|-------|
| Supply Voltage                     | V <sub>CC</sub>           | 3.13            |      | 3.47                 |       |       |
| Power Dissipation                  | PD                        |                 |      | 2.0                  | W     |       |
| <b>Transmitter</b>                 |                           |                 |      |                      |       |       |
| Data Input Swing Differential      | V <sub>IN</sub>           | 190             |      | 1000                 | mV    |       |
| Differential line input Impedance  | R <sub>IN</sub>           | 80              | 100  | 120                  | Ohm   |       |
| Transmitter Fault Output-High      | V <sub>FaultH</sub>       | 2               |      | V <sub>CC</sub> +0.3 | V     |       |
| Transmitter Fault Output-Low       | V <sub>FaultL</sub>       | V <sub>EE</sub> |      | V <sub>EE</sub> +0.8 | V     |       |
| Transmitter Disable Voltage-High   | V <sub>DisH</sub>         | 2               |      | V <sub>CC</sub> +0.3 | V     |       |
| Transmitter Disable Voltage- low   | V <sub>DisL</sub>         | V <sub>EE</sub> |      | V <sub>EE</sub> +0.8 | V     |       |
| <b>Receiver</b>                    |                           |                 |      |                      |       |       |
| Differential line Output Impedance | R <sub>OUT</sub>          | 80              | 100  | 120                  | Ohm   |       |
| Differential Data Output Voltage   | V <sub>DR</sub>           | 350             |      | 850                  | mVp-p |       |
| LOS Output Voltage-High            | V <sub>LOSH</sub>         | 2               |      | V <sub>CC</sub> +0.3 | V     |       |
| LOS Output Voltage-Low             | V <sub>LOSL</sub>         | V <sub>EE</sub> |      | V <sub>EE</sub> +0.8 | V     |       |
| <b>Others</b>                      |                           |                 |      |                      |       |       |
| Cold-Start time                    | T <sub>start-cooled</sub> |                 |      | 35                   | s     |       |

## Optical Characteristics

| Parameter                                                    | Symbol                | Min.    | Typ. | Max.    | Unit  | Notes |
|--------------------------------------------------------------|-----------------------|---------|------|---------|-------|-------|
| <b>Transmitter</b>                                           |                       |         |      |         |       |       |
| Wavelength                                                   | $\lambda$             | 1529.55 |      | 1560.61 | nm    |       |
| Center Wavelength Spacing                                    |                       | 100     |      |         | GHz   |       |
| Average Launched Power                                       | P <sub>O</sub>        | -1      |      | 5       | dBm   |       |
| Extinction Ratio                                             | ER                    | 6       |      |         | dB    |       |
| Average Launched Power (Laser Off)                           | P <sub>off</sub>      |         |      | -30     | dBm   |       |
| Side-Mode Suppression Ratio                                  | SMSR                  | 30      |      |         | dB    |       |
| Relative Intensity Noise                                     | RIN <sub>20 OMA</sub> |         |      | -130    | dB/Hz |       |
| <b>Receiver</b>                                              |                       |         |      |         |       |       |
| Center Wavelength                                            | $\lambda_{IN}$        | 1260    |      | 1620    | nm    |       |
| Receiver Overload                                            | P <sub>overload</sub> | 2       |      |         | dBm   |       |
| Receiver Sensitivity @5E-5 BOL                               | P <sub>sen BOL</sub>  |         |      | -15     | dBm   |       |
| Receiver Sensitivity @5E-5 EOL                               | P <sub>sen EOL</sub>  |         |      | -14.5   | dBm   | 1     |
| Receiver Sensitivity @5E-5 EOL after 10km fiber transmission | P <sub>sen1 EOL</sub> |         |      | -9.0    | dBm   | 1     |
| Los Of Signal Assert                                         | PA                    | -30     |      |         | dBm   |       |
| Los Of Signal De-assert                                      | PD                    |         |      | -16     | dBm   |       |
| LOS -Hysteresis                                              | P <sub>Hys</sub>      | 0.5     |      | 6       | dB    |       |

### Notes:


1. Measured at 5E-5, ER>4dB, PRBS 2<sup>31</sup> -1

## Pin Descriptions

| Pin | Symbol  | Name/Descriptions                                              | Ref. |
|-----|---------|----------------------------------------------------------------|------|
| 1   | VEET    | Transmitter Ground                                             | 1    |
| 2   | TFAULT  | Transmitter Fault                                              | 2    |
| 3   | TDIS    | Transmitter Disable. Laser output disabled on high or open.    | 3    |
| 4   | SDA     | 2-wire Serial Interface Data Line                              | 2    |
| 5   | SCL     | 2-wire Serial Interface Clock Line                             | 2    |
| 6   | MOD_ABS | Module Absent. Grounded within the module                      | 2    |
| 7   | NA      | Not Used                                                       |      |
| 8   | RX_LOS  | Loss of Signal indication. Logic 0 indicates normal operation. | 4    |
| 9   | NA      | No Used                                                        |      |
| 10  | VEER    | Receiver Ground                                                | 1    |
| 11  | VEER    | Receiver Ground                                                | 1    |
| 12  | RD-     | Receiver Inverted DATA out. AC Coupled.                        |      |
| 13  | RD+     | Receiver Non-inverted DATA out. AC Coupled.                    |      |
| 14  | VEER    | Receiver Ground                                                | 1    |
| 15  | VCCR    | Receiver Power Supply                                          | 5    |
| 16  | VCCT    | Transmitter Power Supply                                       | 5    |
| 17  | VEET    | Transmitter Ground                                             | 1    |
| 18  | TD+     | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-     | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | VEET    | Transmitter Ground                                             | 1    |


### Notes:

1. Circuit ground is internally isolated from chassis ground.
2. T<sub>FAULT</sub> is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to V<sub>cc</sub> + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on T<sub>DIS</sub> >2.0V or open, enabled on T<sub>DIS</sub> <0.8V.
4. LOS is open collector output. Should be pulled up with 4.7k – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
5. Internally connected

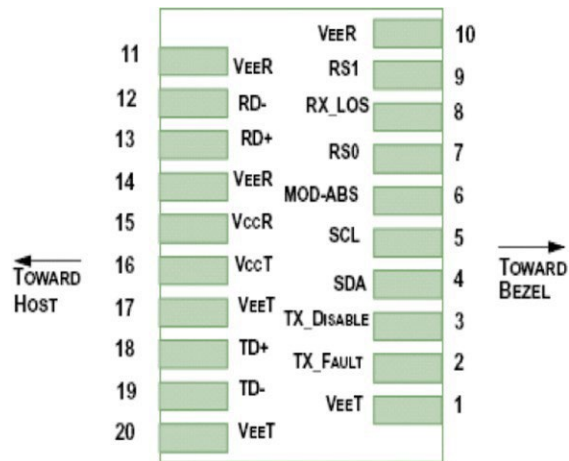


Pin-out of connector Block on Host board


### Block Diagram of Transceiver

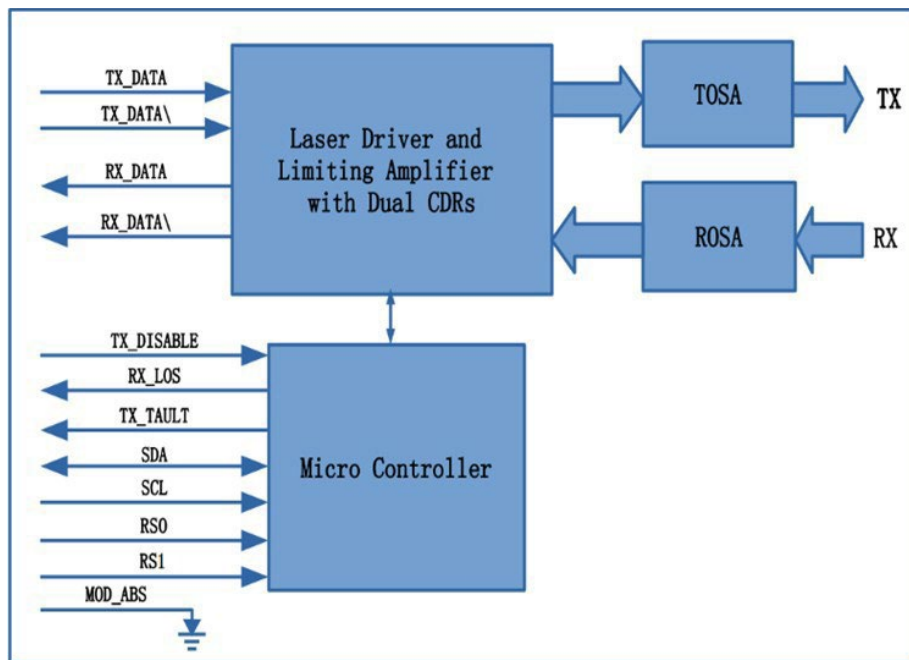

Recommended Interface Circuit

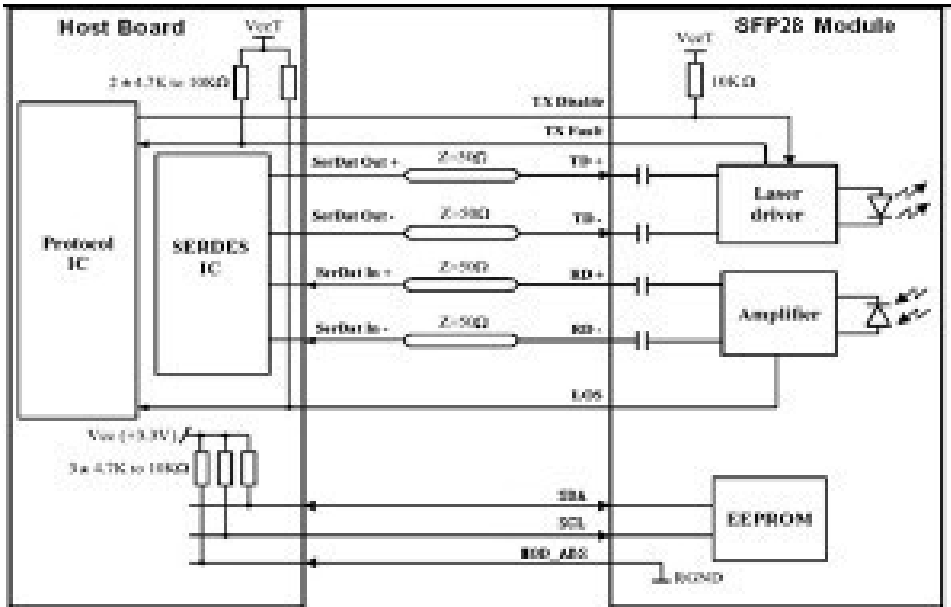

Mechanical Specifications

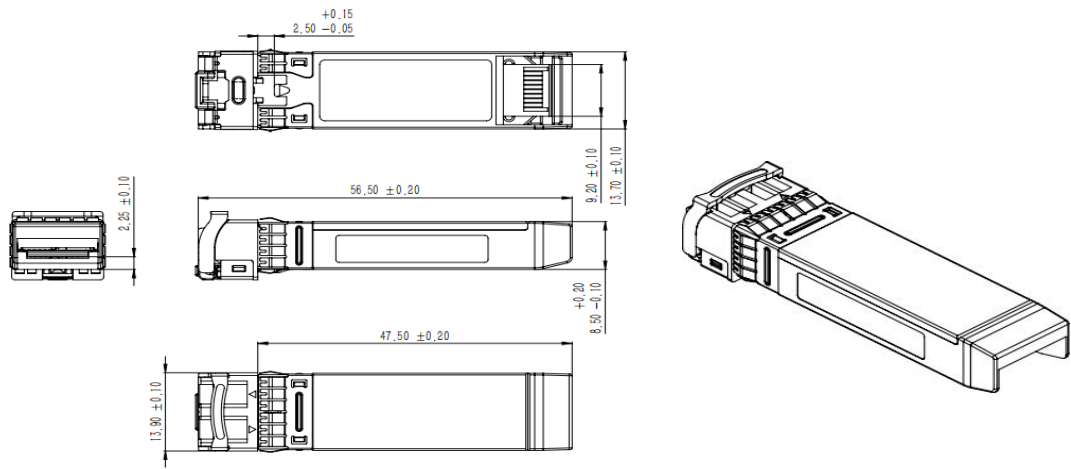

## **OptioConnect**

### **Innovation for the Future of High-Speed Networking**

#### **Who We Are**

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

#### **What We Do**

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

#### **Smarter Networks by Design**

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

#### **Our Team**

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

#### **Our Mission**

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

#### **Let's Connect**

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

[www.optioconnect.com](http://www.optioconnect.com) | [info@optioconnect.com](mailto:info@optioconnect.com)

