

QSFP56-100GB-PDAC2-5M-MX-AO

Mellanox® Compatible TAA 100GBase-CU QSFP56 to QSFP56 Direct Attach Cable (Passive Twinax, 2.5m)

Features

- Compliant with SFF-8636
- Support I2C two line strong interface, easy to control
- Compliant with IEEE802.3bj & IEEE802.3cd
- Operating Temperature: -20 to 75 Celsius
- Low Crosstalk
- Hot-pluggable
- RoHS Compliant and Lead-Free
- Low power



Applications

- 100GBase Ethernet

Product Description

This is a Mellanox® compatible 100GBase-CU QSFP56 to QSFP56 direct attach cable that operates over passive copper with a maximum reach of 2.5m (8.2ft). It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This direct attach cable is TAA (Trade Agreements Act) compliant, and is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products."



Electrical Characteristics

| Parameter | Requirement | Test Condition | | | | | | |
|--|--|--|--------|--------|--------|--------|----------------|----------------|
| Differential Impedance | | | | | | | | |
| Cable Impedance | 105+5/-10Ω | Rise time of 25ps (20% ~ 80%). | | | | | | |
| Paddle Card Impedance | 100±10Ω | | | | | | | |
| Cable Termination Impedance | 100±15Ω | | | | | | | |
| Differential (Input/Output) Return Loss SDD11/SDD22 | $\text{Return_loss}(f) \geq \left\{ \begin{array}{ll} 16.5-2\sqrt{f} & 0.05 \leq f < 4.1 \\ 10.66-14\log_{10}(f/5.5) & 4.1 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Return loss(f) is the return loss at frequency f | 10MHz≤f ≤19GHz | | | | | | |
| Differential to common mode (Input/Output) Return loss SCD11/SCD22 | $\text{Return loss}(f) \geq \left\{ \begin{array}{ll} 22-(20/25.78)f & 0.01 \leq f < 12.89 \\ 15-(6/25.78)f & 12.89 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Return loss(f) is the Differential to common-mode return loss at frequency f | 10MHz≤f ≤19GHz | | | | | | |
| Common mode to common-mode (Input/Output) Return loss SCC11/ SCD22 | Return loss (f)≥ 2dB 0.2≤f≤19 Where f is the frequency in GHz Return loss (f) is the common-mode to common-mode return loss at frequency f | 10MHz≤f ≤19GHz | | | | | | |
| Low Level Contact Resistance | 70 milliohms Max. From initial. | EIA-634-23: Apply a maximum voltage of 20mV and current of 100 mA. | | | | | | |
| Insulation Resistance | 10 Mohm (Min) | EIA364-21:AC 300V 1minute | | | | | | |
| Dielectric Withstanding Voltage | NO disruptive discharge | EIA-364-20: Apply a voltage of 300 VDC for 1 minute between adjacent terminals and between adjacent terminals and ground | | | | | | |
| Differential Insertion Loss Max. For TPa to TPb Excluding Test fixture | | | | | | | | |
| Differential Insertion Loss (SDD21 Max) | F AWG | 1.25GHz | 2.5GHz | 5.0GHz | 7.0GHz | 10Ghz | 12.89Ghz | 10MHz≤f ≤19GHz |
| | 30(1m) Max. | 4.5dB | 5.4dB | 6.3dB | 7.5dB | 8.5dB | 10.5dB | |
| | 30/28(3m)Max. | 7.5dB | 9.5dB | 12.2dB | 14.8dB | 18.0dB | 21.5dB | |
| | 26(3m) Max. | 5.7dB | 7.2dB | 9.9 dB | 11.9dB | 14.1dB | 16.5dB | |
| | 26/25(5m)Max. | 7.8dB | 10.0dB | 13.5dB | 16.0dB | 19.0dB | 22.0dB | |
| Insertion Loss Deviation | -0.176*f - 0.7 ≤ ILD ≤ 0.176* f + 0.7 | | | | | | 50MHz≤f ≤19GHz | |
| Differential to common mode conversion Loss-Differential Insertion Loss (SCD21-SDD21) | $\text{Conversion loss}(f) - \text{IL}(f) \geq \left\{ \begin{array}{ll} 10 & 0.01 \leq f < 12.89 \\ 27-(29/22)f & 12.89 \leq f < 15.7 \\ 6.3 & 15.7 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Conversion_loss (f) is the cable assembly differential to common-mode conversion loss IL (f) is the cable assembly insertion loss | | | | | | 10MHz≤f ≤19GHz | |

| | | |
|--|-----------------|----------------|
| MDNEXT (multiple disturber near-end crosswalk) | ≥26dB @12.89GHz | 10MHz≤f ≤19GHz |
| Intra Skew | 15ps/m | 10MHz≤f ≤19GHz |

Environment Performance

| Parameter | Requirement | Test Condition |
|-----------------------------|--|---|
| Operating Temperature Range | -20°C to +75°C | Cable operating temperature range |
| Storage Temperature Range | -40°C to +80°C | Cable storage temperature range in packed condition |
| Thermal Cycling Non-Powered | No evidence of physical damage | EIA-364-32D, Method A, -25 to 90C, 100 cycles, 15 min, dwells |
| Salt Spraying | 48 hours salt spraying after shell corrosive area less than 5% | EIA-364-26 |
| Mixed Flowing Gas | Pass electrical tests per 3.1 after stressing (Fpr connector only) | EIA-364-35 Class II, 14 days. |
| Temp. Life | No evidence of physical damage | EIA-364-17C w/RH, Damp heat 90°C at 85% RH for 500 hours then return to ambient |
| Cable Cold Bend | 4H No evidence of physical damage | Condition: -20°C ±2°C, mandrel diameter is 6 times the cable diameter. |

Mechanical and Physical Characteristics


| Parameter | Requirement | Test Condition |
|------------------------------|---|--|
| Vibration | Pass electrical tests per 3.1 after stressing | Clamp & vibrate per EIA-364-28E, TC-VII, test condition letter – D, 15 minutes in X, Y & Z axis |
| Cable Flex | No evidence of physical damage | Flex cable 180° for 20 cycles (±90° from nominal position) at 12 cycles per minute with a 1.0kg load applied to the cable jacket. Flex in the boot area 90° in each direction from vertical. Per EIA-364-41C |
| Cable Plug Retention in Cage | 90N Min. No evidence of physical damage | Force to be applied axially with no damage to cage. Per SFF 8661 Rev 2.1 Pull on cable jacket approximately 1 ft behind cable plug. No functional damage to cable plug below 90N. Per SFF-8432 Rev 5.0 |
| Cable Retention in Plug | 90N Min. No evidence of physical damage | Cable plug is fixtured with the bulk cable hanging vertically. A 90N axial load is applied (gradually) to the cable jacket and held for 1 minute. Per EIA-364-38B |
| Mechanical Shock | Pass electrical tests Per 3.1 after stressing | Clamp and shock per EIA-364-27B, TC- G,3 times in 6 directions, 100g, 6ms. |
| Cable Plug Insertion | 40N Max (QSFP28) | Per SFF8661 Rev 2.1 |
| Cable plug Extraction | 30N Max (QSFP28) | Place axial load on de-latch to de-latch plug.Per SFF8661 Rev 2.1 |

| | | |
|-------------------|---|--|
| Durability | 50 cycles, No evidence of physical damage | EIA-364-09, perform plug & unplug cycles: Plug and receptacle mate rate: 250times/hour. 50times for QSFP28/SFP28 module (CONNECTOR TO PCB) |
|-------------------|---|--|

Wiring Diagram

| X1 | X2 | Remarks | X1 | X2 | Remarks |
|---|--|---------|--------------------------------------|--------------------------------------|---------------------------|
| 18 (RX1-) | 37(TX1-) | Pair | 37(TX1-) | 18 (RX1-) | Pair |
| 17 (RX1+) | 36 (TX1+) | | 36 (TX1+) | 17 (RX1+) | |
| 15 (RX3-) | 34 (TX3-) | Pair | 34 (TX3-) | 15 (RX3-) | Pair |
| 14 (RX3+) | 33 (TX3+) | | 33 (TX3+) | 14 (RX3+) | |
| 6 (TX4+) | 25 (RX4+) | Pair | 25 (RX4+) | 6 (TX4+) | Pair |
| 5 (TX4-) | 24 (RX4-) | | 24 (RX4-) | 5 (TX4-) | |
| 3 (TX2+) | 22 (RX2+) | Pair | 22 (RX2+) | 3 (TX2+) | Pair |
| 2 (TX2-) | 21 (RX2-) | | 21 (RX2-) | 2 (TX2-) | |
| 1, 4, 7, 13, 16, 19, 20, 23, 26, 32,35,38 | 1, 4, 7, 13, 16, 19,20, 23, 26, 32, 35, 38 | GND | 8, 9, 10, 11, 12, 27, 28, 29, 30, 31 | 8, 9, 10, 11, 12, 27, 28, 29, 30, 31 | EEPROM point at both ends |

Mechanical Specifications

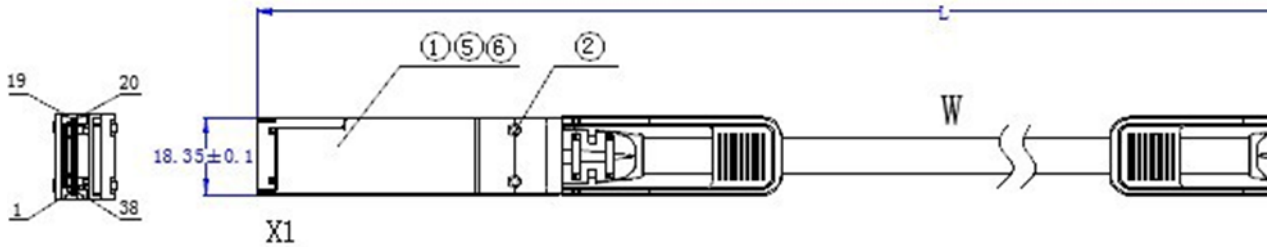

UNIT: mm

About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is ingrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications ranging from NEBS Level 3 to ISO 9001:2015 with every new development while maintaining the signature reliability of its products.



U.S. Headquarters

Email: sales@addonnetworks.com

Telephone: +1 877.292.1701

Fax: 949.266.9273

Europe Headquarters

Email: salesemea@addonnetworks.com

Telephone: +44 1285 842070