Q28-100GP4-BXU2733-LR410HP-OPC

HP® Compatible TAA 100GBase-BX QSFP28 Transceiver Single Lambda (SMF, 1271nmTx/1331nmRx, 10km w/FEC, LC, DOM)

Features

- Compliant with 100G Lambda MSA 100G-LR Specifications
- Compliant with SFF-8636 Rev 2.10a
- Single 3.3V Power Supply
- Power dissipation
- Single-mode Fiber
- Bidi LC Connectors
- Commercial Temperature 0 to 70 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free

Applications:

- 100GBase Ethernet
- Datacenter

Product Description

This HP® compatible QSFP28 transceiver provides 100GBase-BX throughput up to 10km w/host FEC over single-mode fiber (SMF) using a wavelength of 1271nmTx/1331nmRx via an LC connector. This bidirectional unit must be used with another transceiver or network appliance of complementing wavelengths. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with HP®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4.
- ESD to the LC Receptacle: compatible with IEC 61000-4-3.
- EMI/EMC: compatible with FCC Part 15 Subpart B Rules, EN55022:2010.
- Laser Eye Safety: compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1, 2.
- RoHS: compliant with EU RoHS 2.0 directive 2015/863/EU.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Maximum Supply Voltage	Vcc	-0.5		3.6	V	
Storage Temperature	Tstg	-40		85	°C	
Operating Case Temperature	Tc	0		70	°C	
Relative Humidity	RH	5		85	%	
Damage Threshold	RXdmg	5.5			dBm	

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.135	3.3	3.465	V	
Power Dissipation	P_{DISS}			4.5	W	
Transmitter						
Differential Data Input Swing Per Lane		900			mVp-p	
Differential Input Impedance	ZIN	90	100	110	Ω	
DC Common-Mode Voltage (Vcm)		-350		2850	mV	
Receiver						
Differential Output Amplitude				900	mVp-p	
Differential Output Impedance	ZOUT	90	100	110	Ω	
Output Rise/Fall Time	Tr/Tf	12			ps	20-80%
Eye Width		0.57			UI	
Eye Height Differential		228			mV	@TP4, $1E^{-15}$
DC Common-Mode Voltage (Vcm)		-350		2850	mV	1

Notes:

1. Vcm is generated by the host. Specification includes effects of ground offset voltage.

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Signaling Speed			53.125		GBd	
Modulation Format			PAM4			
Center Wavelength	λC	1264.5	1271	1277.5	nm	
Side-Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio	ER	3.5			dB	
Transmit OMA	TxOMA	0.7		4.7	dBm	
Transmit Average Power	TxAVG	-1.4		4.5	dBm	1
Launch Power in OMA_{outer} Minus TDECQ		-0.7			dBm	2
Launch Power in OMA_{outer} Minus TDECQ		-0.6			dBm	3
Transmitter and Dispersion Eye Closure	TDECQ			3.4	dB	
Launch Power of Off Transmitter Per Lane				-30	dBm	
Relative Intensity Noise	RIN			-136	dB/Hz	
Optical Return Loss Tolerance				15.6	dB	4
Transmitter Reflectance				-26	dB	
Receiver						
Signaling Speed			53.125		GBd	
Center Wavelength	λC	1324.5	1331	1337.5	nm	
Damage Threshold		5.5			dBm	
Receive Power (OMA_{outer})	RxOMA			4.7	dBm	
Average Receive Power	RxAVG	-7.7		4.5	dBm	
Receiver Sensitivity (OMA_{outer})	SenOMA			MAX (-6.1, SECQ-7.5)	dBm	5
Stressed Sensitivity	SRS			-4.1	dBm	
Receiver Reflectance				-26	dB	
LOS Assert	LOSA	-26		-12	dBm	
LOS De-Assert	LOSD			-10	dBm	

Notes:

1. Average launch power (minimum) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.
2. For ER≥4.5dB.
3. For ER<4.5dB.
4. Transmitter reflectance is defined looking into the transmitter.
5. Sensitivity is specified at $2.4x10^{-4}$ BER.

Pin Descriptions

Pin	Logic	Symbol	Name/Descriptions	Notes
1		GND	Module Ground.	1
2	CML-I	Tx2-	Transmitter Inverted Data Input.	
3	CML-I	Tx2+	Transmitter Non-Inverted Data Output.	
4		GND	Module Ground.	1
5	CML-I	Tx4-	Transmitter Inverted Data Input.	
6	CML-I	Tx4+	Transmitter Non-Inverted Data Output.	
7		GND	Module Ground.	1
8	LVTLL-I	ModSelL	Module Select.	
9	LVTLL-I	ResetL	Module Reset.	
10		VccRx	+3.3V Receiver Power Supply.	2
11	LVCMOS-I/O	SCL	2-Wire Serial Interface Clock.	
12	LVCMOS-I/O	SDA	2-Wire Serial Interface Data.	
13		GND	Module Ground.	
14	CML-O	Rx3+	Receiver Non-Inverted Data Output.	
15	CML-O	Rx3-	Receiver Inverted Data Output.	
16		GND	Module Ground.	1
17	CML-O	Rx1+	Receiver Non-Inverted Data Output.	
18	CML-O	Rx1-	Receiver Inverted Data Output.	
19		GND	Module Ground.	1
20		GND	Module Ground.	1
21	CML-O	Rx2-	Receiver Inverted Data Output.	
22	CML-O	Rx2+	Receiver Non-Inverted Data Output.	
23		GND	Module Ground.	1
24	CML-O	Rx4-	Receiver Inverted Data Output.	1
25	CML-O	Rx4+	Receiver Non-Inverted Data Output.	
26		GND	Module Ground.	1
27	LVTTL-O	ModPrsL	Module Present.	
28	LVTTL-O	IntL	Interrupt.	
29		VccTx	+3.3V Transmitter Power Supply.	2
30		Vcc1	+3.3V Power Supply.	2
31	LVTTL-I	LPMode	Low-Power Mode.	
32		GND	Module Ground.	1
33	CML-I	Tx3+	Transmitter Non-Inverted Data Input.	
34	CML-I	Tx3-	Transmitter Inverted Data Output.	
35		GND	Module Ground.	1

36	CML-I	Tx1+	Transmitter Non-Inverted Data Input.	
37	CML-I	Tx1-	Transmitter Inverted Data Output.	
38		GND	Module Ground.	1

Notes:

1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module, and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
2. VccRx, Vcc1, and VccTx are the receiver and transmitter power supplies and shall be applied concurrently. Recommended host board power supply filtering is shown below. VccRx, Vcc1, and VccTx may be internally connected within the QSFP28 transceiver module in any combination. The connector pins are each rated for a maximum current of 1000mA.

Electrical Pin-Out Details

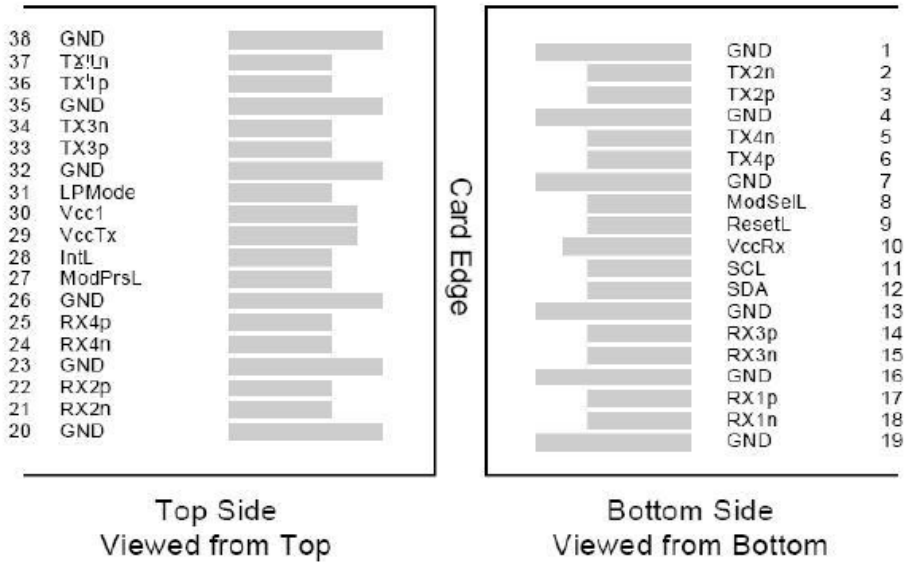

Mechanical Specifications

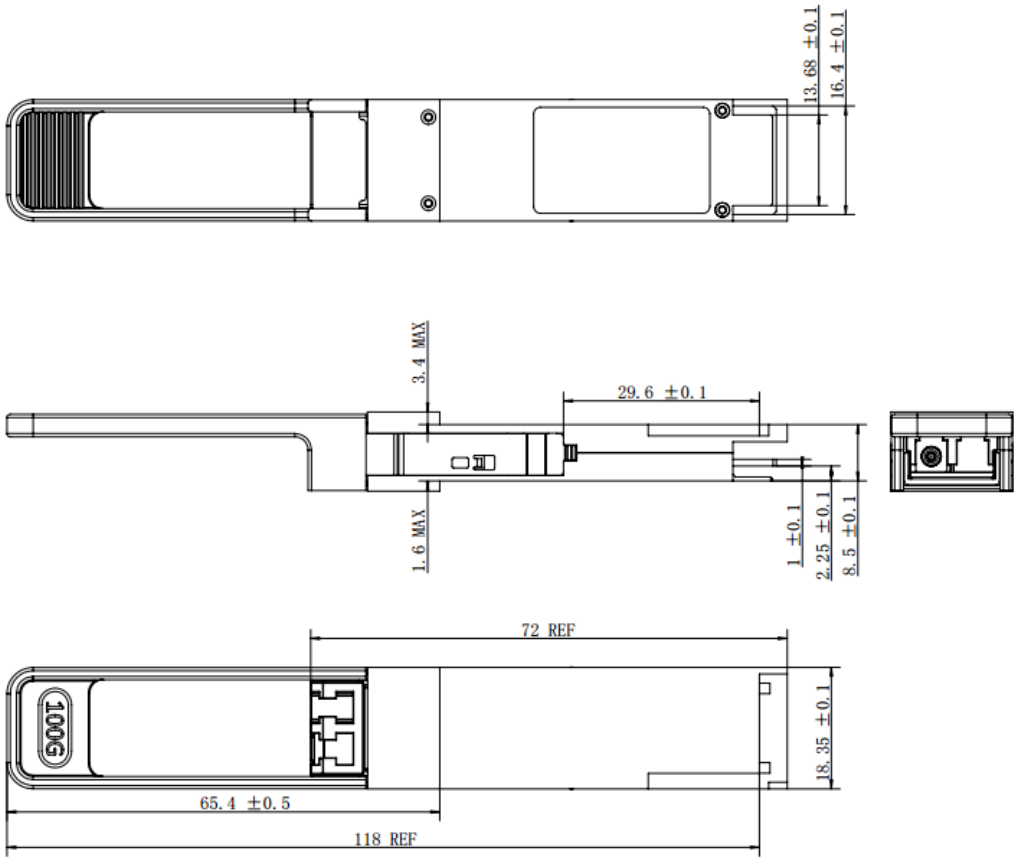

OptioConnect
Innovation for the Future of High-Speed Networking

Who We Are
OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

What We Do
At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

Smarter Networks by Design
Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

Our Team
Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

Our Mission
To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

Let's Connect
Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.
www.optioconnect.com | info@optioconnect.com