

## S5U19A-AO

HP® S5U19A Compatible TAA 25GBase-SR SFP28 Transceiver (MMF, 850nm, 400m, LC, DOM)

### Features

- SFF-8402 and SFF-8472 Compliance
- Duplex LC Connector
- Commercial Temperature 0 to 70 Celsius
- Multi-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications

- 25GBase Ethernet
- Access and Enterprise

### Product Description

This HP® S5U19A compatible SFP28 transceiver provides 25GBase-SR throughput up to 400m over multi-mode fiber (MMF) using a wavelength of 850nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with HP®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products."



## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

## Absolute Maximum Ratings

Parameter	Symbol	Min.		Max.	Unit
Maximum Supply Voltage	Vcc	-0.5		4.0	V
Storage Temperature	TS	-40		85	°C
Operating Case Temperature	Tc	0	25	70	°C
Operating Humidity	RH	5		85	%
Receiver Power	R <sub>MAX</sub>			2.5	dBm
Data Rate		10.3	25.78		Gbps

## Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.135	3.3	3.465	V	
Power Supply Current	Icc			290	mA	
Power Consumption	P <sub>DISS</sub>			1000	mW	
<b>Transmitter</b>						
Differential data input swing	V <sub>in,p-p</sub>	180		700	mVp-p	
Input differential impedance	Z <sub>in</sub>		100		Ω	
TX_FAULT	Transmitter Fault	V <sub>OH</sub>	2.0	Vcc	V	TX_FAULT
	Normal Operation	V <sub>OL</sub>	0	0.8	V	
TX_DISABLE	Transmitter Disable	V <sub>IH</sub>	2.0	Vcc	V	TX_DISABLE
	Transmitter Enable	V <sub>IL</sub>	0	0.8	V	
<b>Receiver</b>						
Output Differential Impedance	Z <sub>0</sub>		100		Ω	
Differential Data Output Swing	V <sub>OUT, P-P</sub>	300		850	mVp-p	1
Data Output Rise Time, Fall Time	t <sub>r, tf</sub>		30		ps	2
RX_LOS	Loss of signal (LOS)	V <sub>OH</sub>	2.0	Vcc	V	RX_LOS
	Normal Operation	V <sub>OL</sub>	0	0.8	V	

**Notes:**

1. Internally AC coupled, but requires a external  $100\Omega$  differential load termination.
2. 20–80%.
3. LOS is an open collector output. Should be pulled up with  $4.7K\Omega$  on the host board.

**Optical Characteristics**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
<b>Transmitter</b>						
<b>Launch Optical Power</b>	P <sub>o</sub>	-7.6		+2.4	dBm	1
<b>Extinction Ratio</b>	ER	2			dB	
<b>Center Wavelength Range</b>	$\lambda_c$	840	850	860	nm	
<b>Transmitter Dispersion Penalty @25.78Gb/s</b>	TWDP			4.3	dB	
<b>Spectral Width (RMS) @25.78Gb/s</b>	$\Delta\lambda$			0.6	nm	
<b>Optical Return Loss Tolerance</b>	ORLT			12	dB	
<b>P<sub>out</sub> @TX-Disable Asserted</b>	P <sub>off</sub>			-30	dBm	1
<b>Receiver</b>						
<b>Center Wavelength</b>	$\lambda_c$	840	850	860	nm	
<b>Receiver Sensitivity (P<sub>avg</sub>)</b>	S			-10.3	dBm	2
<b>Receiver Sensitivity (P<sub>avg</sub>)</b>	S			-11.0	dBm	3
<b>Receiver Overload (P<sub>avg</sub>)</b>	POL	2.5			dBm	
<b>Optical Return Loss</b>	ORL	12			dB	
<b>LOS De-Assert</b>	LOSD			-11	dBm	
<b>LOS Assert</b>	LOSA	-30			dBm	
<b>LOS Hysteresis</b>		0.5			dB	

**Notes:**

1. 50/125 $\mu$ m fiber with NA = 0.2.
2. Measured with PRBS  $2^{31}-1$  at 5e-5 BER @25.78Gb/s.
3. Measured with PRBS  $2^{31}-1$  at 5e-5 BER @10.3Gb/s.

### Pin Descriptions


Pin	Symbol	Name/Descriptions	Ref.
1	VeeT	Transmitter Ground	1
2	TX_Fault	Transmitter Fault (LVTTL-O) - High indicates a fault condition	2
3	TX_Disable	Transmitter Disable (LVTTL-I) – High or open disables the transmitter	3
4	SDA	Two wire serial interface Data Line (LVCMS-I/O) (MOD-DEF2)	4
5	SCL	Two wire serial interface Clock Line (LVCMS-I/O) (MOD-DEF1)	4
6	MOD_ABS	Module Absent (Output), connected to VeeT or VeeR in the module	5
7	RS0	Rate Select 0 – Not used, Presents high input impedance	6
8	RX_LOS	Receiver Loss of Signal (LVTTL-O)	2
9	RS1	Rate Select 1 – Not used, Presents high input impedance	6
10	VeeR	Receiver Ground	1
11	VeeR	Receiver Ground	1
12	RD-	Inverse Received Data out (CML-O), AC Coupled	
13	RD+	Received Data out (CML-O), AC Coupled	
14	VeeR	Receiver Ground	
15	VccR	Receiver Power - +3.3V	
16	VccT	Transmitter Power - +3.3 V	
17	VeeT	Transmitter Ground	1
18	TD+	Transmitter Data In (CML-I), AC Coupled	
19	TD-	Inverse Transmitter Data In (CML-I), AC Coupled	
20	VeeT	Transmitter Ground	1

### Notes:

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that on the host board requires a 4.7KΩ to 10KΩ pull-up resistor to VccHost.
3. This input is internally biased high with a 4.7KΩ to 10KΩ pull-up resistor to VccT.
4. Two-Wire Serial interface clock and data lines require an external pull-up resistor dependent on the capacitance load.
5. This is a ground return that on the host board requires a 4.7KΩ to 10KΩ pull-up resistor to VccHost.
6. Rate select can also be set through the 2-wire bus in accordance with SFF-8472 v. 10.2, Rx Rate Select is set at Bit 3, Byte 110,


Address A2h. Tx Rate Select is set at Bit 3, Byte 118, Address A2h.

Note: writing a “1” selects maximum bandwidth operation. Rate select is the logic OR of the input state of Rate Select Pin and 2-wire bus.

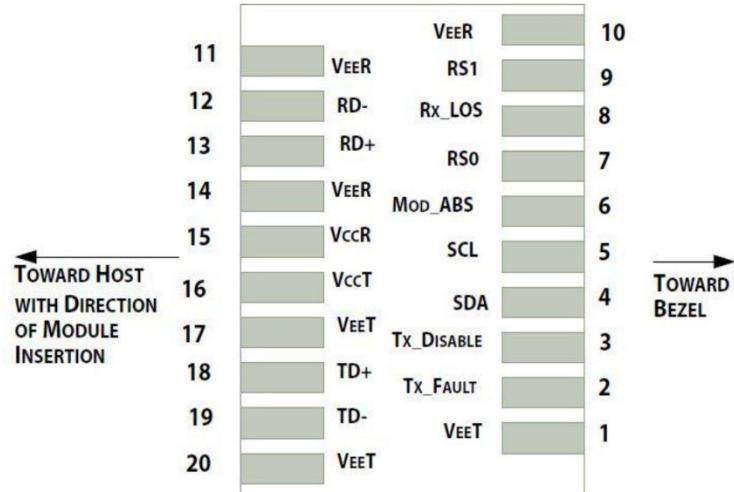


Pin-out of connector Block on Host board

### Recommended Application Interface Block Diagram

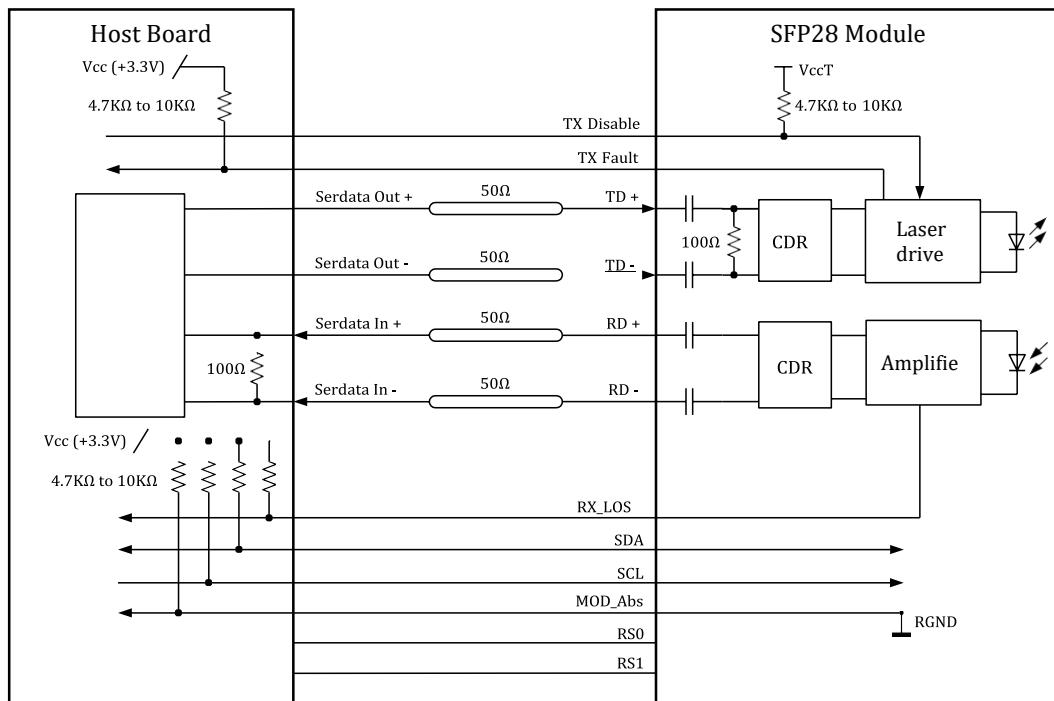


## Mechanical Specifications

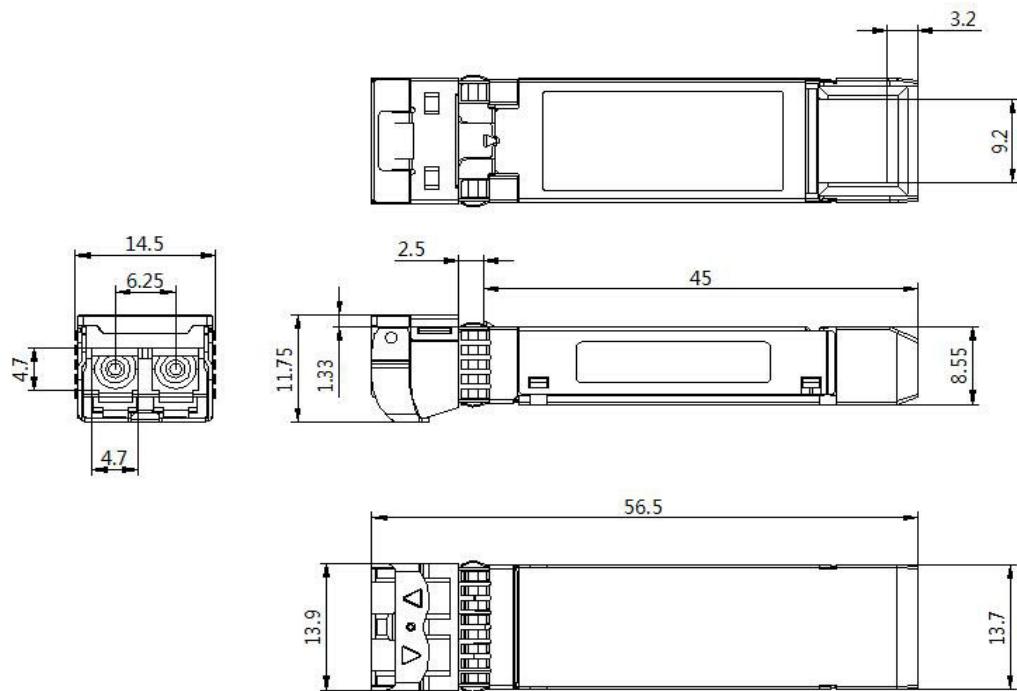

## EEPROM Information

EEPROM memory map specific data field description is as below:

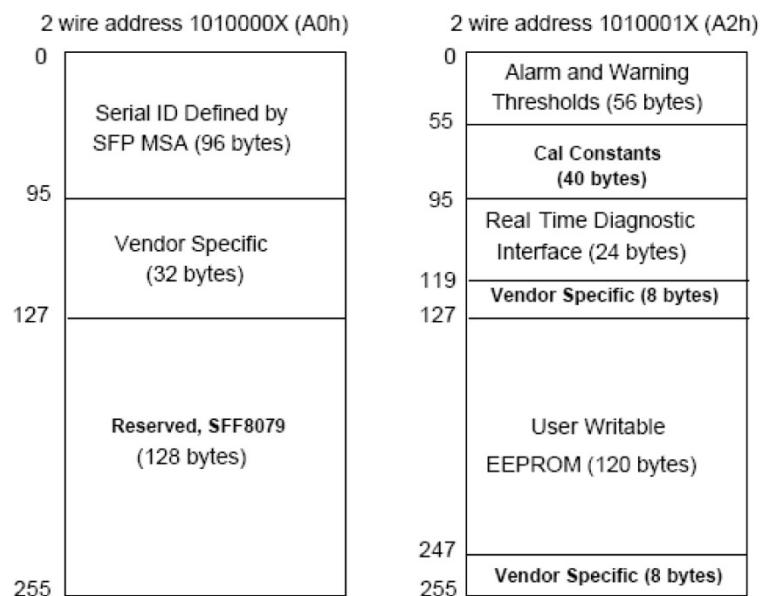

## About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is engrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.



## U.S. Headquarters

Email: [sales@addonnetworks.com](mailto:sales@addonnetworks.com)

Telephone: +1 877.292.1701

Fax: 949.266.9273

## Europe Headquarters

Email: [salesupportemea@addonnetworks.com](mailto:salesupportemea@addonnetworks.com)

Telephone: +44 1285 842070