

V50017-U367-K500-CW27-AO

Coriant® Compatible TAA 1000Base-CWDM SFP Transceiver (SMF, 1270nm, 40km, LC, DOM)

Features

- INF-8074 and SFF-8472 Compliance
- Duplex LC Connector
- Commercial Temperature 0 to 70 Celsius
- Single-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



Applications

- Gigabit Ethernet over CWDM
- Access and Enterprise

Product Description

This Coriant® compatible SFP transceiver provides 1000Base-CWDM throughput up to 40km over single-mode fiber (SMF) using a wavelength of 1270nm via an LC connector. It can operate at temperatures between 0 and 70C. The listed reach has been determined using a link budget calculation and tested in a standard environment. Actual link distances achieved will be dependent upon the deployed environment. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Coriant®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products.")



Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|----------------------------|--------|-------|------|------------|------|-------|
| Data Rate | DR | 0.622 | | 1.25 | Gbps | |
| Bit Error Rate | BER | | | 10^{-12} | | |
| Operating Case Temperature | Tc | 0 | | 70 | °C | 1 |
| Storage Temperature | Tstg | -40 | | 85 | °C | 2 |
| Supply Voltage | VMAX | -0.5 | | 4 | V | 3 |

Notes:

1. Case temperature.
2. Ambient temperature.
3. For the electrical power interface.
4. The maximum power consumption refers to the maximum power consumption of the optical module under nominal maximum operating temperature and in a flow test environment.

Electrical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|-------------------------------------|---------|---------|------|----------|----------|-------|
| Maximum Power Consumption | PC | | | 1 | W | 4 |
| Input Voltage | Vcc | 3.14 | 3.3 | 3.46 | V | |
| Supply Current | Icc | | 200 | 300 | mA | 3 |
| Transmitter | | | | | | |
| Input Differential Impedance | RIN | | 100 | | Ω | |
| Single-Ended Data Input Swing | VIN,pp | 250 | | 1200 | mV | |
| Transmit Disable Voltage | VD | Vcc-1.3 | | Vcc | V | |
| Transmit Enable Voltage | VEN | Vee | | Vee+0.8 | V | |
| Transmit Disable Assert Time | | | | 10 | μ s | |
| Receiver | | | | | | |
| Single-Ended Data Output Swing | VOUT,pp | 300 | 400 | 800 | mV | |
| Data Output Rise/Fall Time (20-80%) | Tr/Tf | | 100 | 175 | ps | |
| LOS Assert | VLOSA | Vcc-0.5 | | Host_Vcc | V | |
| LOS De-Assert | VLOSD | Vee | | Vee+0.5 | V | |

Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|-----------------------------------|---------------------------|------|------|-------|-------|-------|
| Transmitter | | | | | | |
| Output Optical Power | PTX | 0 | | 5 | dBm | 1 |
| Optical Center Wavelength | λ C | 1265 | 1271 | 1277 | nm | |
| Wavelength Temperature Dependence | | | 0.08 | 0.125 | nm/°C | |
| Extinction Ratio | ER | 9 | | | dB | |
| Side-Mode Suppression Ratio | SMSR | 30 | | | dB | |
| Spectral Width (-20dB) | $\Delta\lambda$ | | | 1 | nm | |
| Optical Rise/Fall Time (20-80%) | Tr/Tf | | | 180 | ps | |
| Relative Intensity Noise | RIN | | | -120 | dB/Hz | |
| Transmitter Jitter (Pk-Pk) | TJ | | | 100 | ps | |
| Output Eye | Compliant with IEEE 802.3 | | | | | |
| Receiver | | | | | | |
| Receiver Overload | POL | 0 | | | dBm | |
| Optical Center Wavelength | λ C | 1260 | | 1620 | nm | |
| Receiver Sensitivity @1.25Gbps | Rx_SEN | | | -26 | dBm | 2 |
| LOS Assert | LOSA | -35 | | | dBm | |
| LOS De-Assert | LOSD | | | -26 | dBm | |
| LOS Hysteresis | LOSH | | 0.5 | | dB | |

Notes:

1. Class 1 product.
2. Measured with a 2^7-1 test pattern @1.25Gbps with a $BER < 10^{-12}$.


Pin Descriptions

| Pin | Symbol | Name/Description | Notes |
|-----|-------------|--|-------|
| 1 | VeeT | Transmitter Ground (Common with Receiver Ground). | 1 |
| 2 | Tx_Fault | Transmitter Fault. Not Supported. | |
| 3 | Tx_Disable | Transmitter Disable. Laser output disabled on “high” or “open.” | 2 |
| 4 | MOD_DEF(2) | Module Definition 2. Data Line for Serial ID. | 3 |
| 5 | MOD_DEF(1) | Module Definition 1. Clock Line for Serial ID. | 3 |
| 6 | MOD_DEF(0) | Module Definition 0. Grounded within the module. | 3 |
| 7 | Rate Select | No Connection Required. | |
| 8 | LOS | Loss of Signal Indication. “Logic 0” indicates normal operation. | 4 |
| 9 | VeeR | Receiver Ground (Common with Transmitter Ground). | 1 |
| 10 | VeeR | Receiver Ground (Common with Transmitter Ground). | 1 |
| 11 | VeeR | Receiver Ground (Common with Transmitter Ground). | 1 |
| 12 | RD- | Receiver Inverted Data Out. AC Coupled. | |
| 13 | RD+ | Receiver Non-Inverted Data Out. AC Coupled. | |
| 14 | VeeR | Receiver Ground (Common with Transmitter Ground). | 1 |
| 15 | VccR | Receiver Power Supply. | |
| 16 | VccT | Transmitter Power Supply. | |
| 17 | VeeT | Transmitter Ground (Common with Receiver Ground). | 1 |
| 18 | TD+ | Transmitter Non-Inverted Data In. AC Coupled. | |
| 19 | TD- | Transmitter Inverted Data In. AC Coupled. | |
| 20 | VeeT | Transmitter Ground (Common with Receiver Ground). | 1 |


Notes:

1. The circuit ground is isolated from the chassis ground.
2. Disabled: TDIS>2V or open, enabled: TDIS<0.8V.
3. Should be pulled up with 4.7kΩ to 10kΩ on the host board to a voltage between 2V and 3.6V.
4. LOS is an open collector output.


Electrical Pad Layout

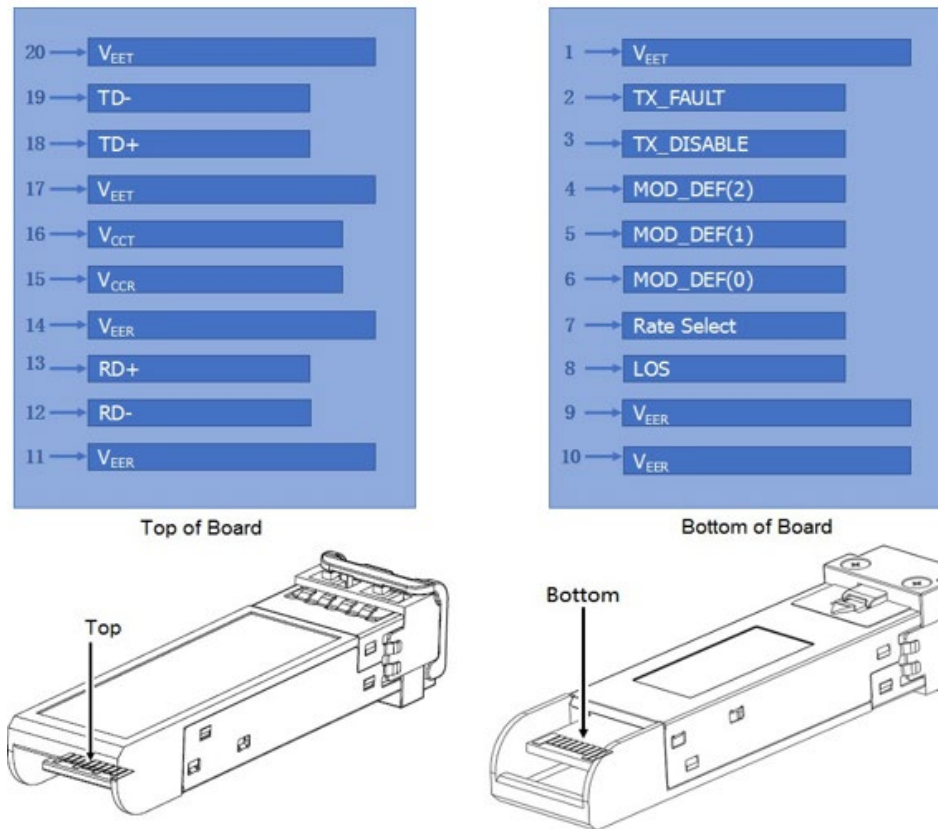

Block Diagram of Transceiver

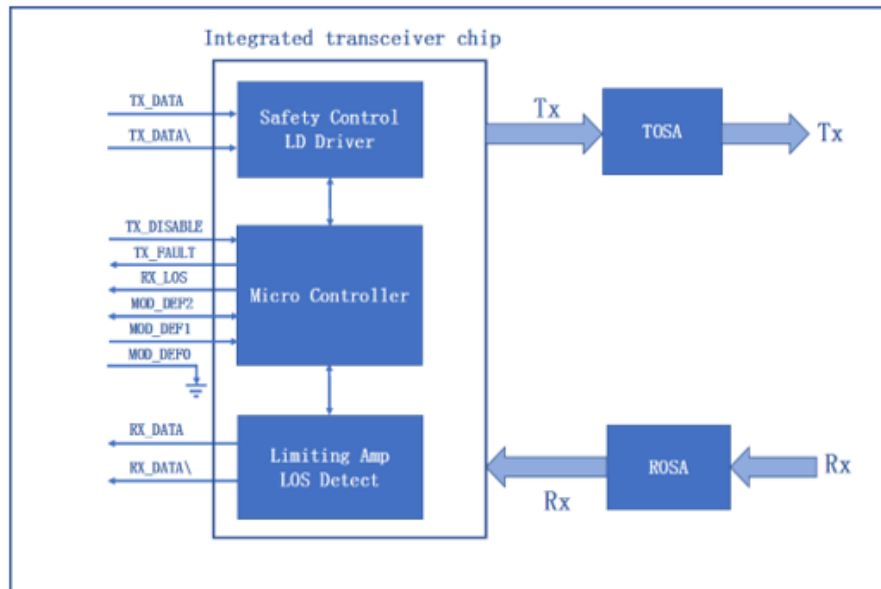

Mechanical Specifications

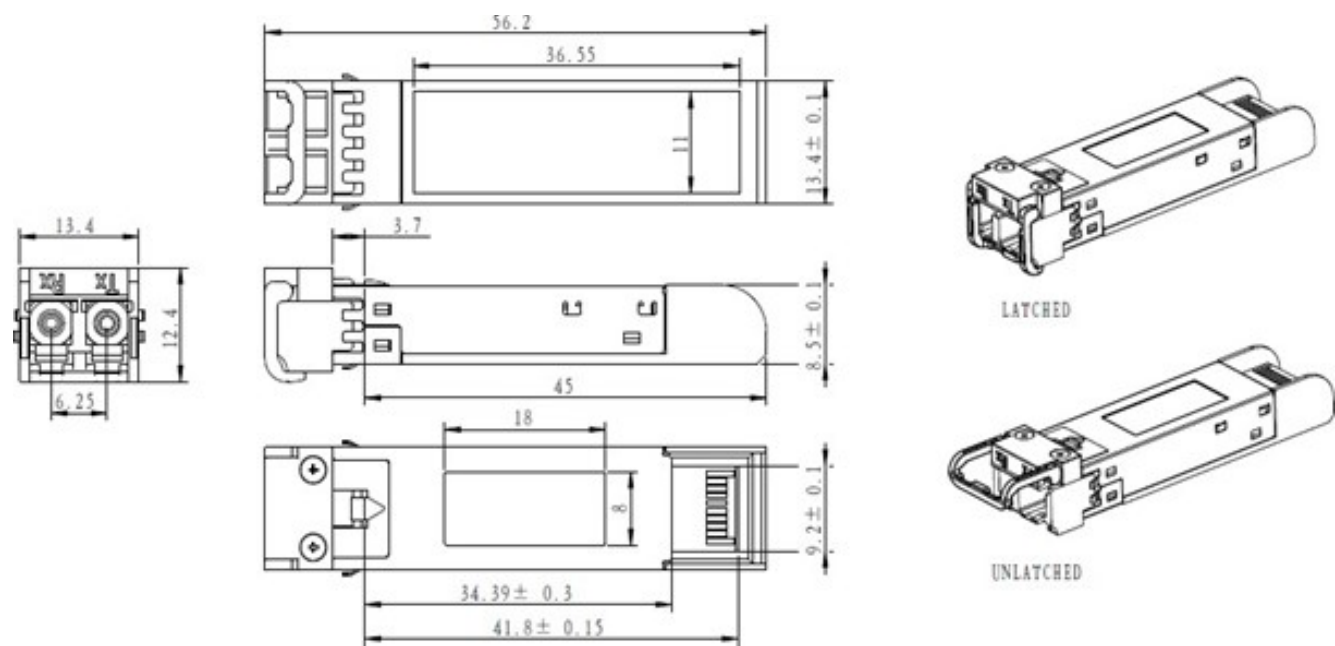

All dimensions are ±0.2mm unless otherwise specified.
Unit: mm

About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is ingrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.



U.S. Headquarters

Email: sales@addonnetworks.com

Telephone: +1 877.292.1701

Fax: 949.266.9273

Europe Headquarters

Email: salesupportemea@addonnetworks.com

Telephone: +44 1285 842070