

### **JNP-QSFP-100G-2DW43-AO**

Juniper Networks® JNP-QSFP-100G-2DW43 Compatible TAA 100GBase-DWDM PAM4 QSFP28 Transceiver C-Band (SMF, 1542.94nm, 80km w/EDFA/DCM, LC, DOM)

#### **Features**

- SFF-8665 Compliance
- 100GHz DWDM ITU Grid
- Duplex LC Connector
- Commercial Temperature 20 to 70 Celsius
- Hot Pluggable
- Single-mode Fiber
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



#### **Applications**

- 100GBase Ethernet
- Access, Metro and Enterprise

#### **Product Description**

This Juniper Networks® JNP-QSFP-100G-2DW43 compatible QSFP28 transceiver provides 100GBase-DWDM throughput up to 80km over single-mode fiber (SMF) using a wavelength of 1542.94nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Juniper Networks® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

## Wavelength Guide (100GHz ITU-T Channel)

| Channel # | Frequency (GHz) | Wavelength (nm) | Frequency (GHz) | Wavelength (nm) |
|-----------|-----------------|-----------------|-----------------|-----------------|
|           | L0              |                 | L1              |                 |
| 16        | 191600          | 1564.68         | 191650          | 1564.27         |
| 17        | 191700          | 1563.86         | 191750          | 1563.45         |
| 18        | 191800          | 1563.05         | 191850          | 1562.64         |
| 19        | 191900          | 1562.23         | 191950          | 1561.83         |
| 20        | 192000          | 1561.42         | 192050          | 1561.01         |
| 21        | 192100          | 1560.61         | 192150          | 1560.2          |
| 22        | 192200          | 1559.79         | 192250          | 1559.39         |
| 23        | 192300          | 1558.98         | 192350          | 1558.58         |
| 24        | 192400          | 1558.17         | 192450          | 1557.77         |
| 25        | 192500          | 1557.36         | 192550          | 1556.96         |
| 26        | 192600          | 1556.56         | 192650          | 1556.15         |
| 27        | 192700          | 1555.75         | 192750          | 1555.34         |
| 28        | 192800          | 1554.94         | 192850          | 1554.54         |
| 29        | 192900          | 1554.13         | 192950          | 1553.73         |
| 30        | 193000          | 1553.33         | 193050          | 1552.93         |
| 31        | 193100          | 1552.52         | 193150          | 1552.12         |
| 32        | 193200          | 1551.72         | 193250          | 1551.32         |
| 33        | 193300          | 1550.92         | 193350          | 1550.52         |
| 34        | 193400          | 1550.12         | 193450          | 1549.72         |
| 35        | 193500          | 1549.32         | 193550          | 1548.91         |
| 36        | 193600          | 1548.52         | 193650          | 1548.11         |
| 37        | 193700          | 1547.72         | 193750          | 1547.32         |
| 38        | 193800          | 1546.92         | 193850          | 1546.52         |
| 39        | 193900          | 1546.12         | 193950          | 1545.72         |
| 40        | 194000          | 1545.32         | 194050          | 1544.92         |
| 41        | 194100          | 1544.53         | 194150          | 1544.13         |
| 42        | 194200          | 1543.73         | 194250          | 1543.33         |
| 43        | 194300          | 1542.94         | 194350          | 1542.54         |
| 44        | 194400          | 1542.14         | 194450          | 1541.75         |
| 45        | 194500          | 1541.35         | 194550          | 1540.95         |
| 46        | 194600          | 1540.56         | 194650          | 1540.16         |
| 47        | 194700          | 1539.77         | 194750          | 1539.37         |
| 48        | 194800          | 1538.98         | 194850          | 1538.58         |

|    |        |         |        |         |
|----|--------|---------|--------|---------|
| 49 | 194900 | 1538.19 | 194950 | 1537.79 |
| 50 | 195000 | 1537.4  | 195050 | 1537    |
| 51 | 195100 | 1536.61 | 195150 | 1536.22 |
| 52 | 195200 | 1535.82 | 195250 | 1535.43 |
| 53 | 195300 | 1535.04 | 195350 | 1534.64 |
| 54 | 195400 | 1534.25 | 195450 | 1533.86 |
| 55 | 195500 | 1533.47 | 195550 | 1533.07 |
| 56 | 195600 | 1532.68 | 195650 | 1532.29 |
| 57 | 195700 | 1531.9  | 195750 | 1531.51 |
| 58 | 195800 | 1531.12 | 195850 | 1530.72 |
| 59 | 195900 | 1530.33 | 195950 | 1529.94 |
| 60 | 196000 | 1529.55 | 196050 | 1529.16 |
| 61 | 196100 | 1528.77 | 196150 | 1528.38 |

#### Absolute Maximum Ratings

| Parameter             | Symbol            | Min. | Typical | Max.                 | Unit |
|-----------------------|-------------------|------|---------|----------------------|------|
| Signal Input Voltage  | V <sub>in</sub>   | -0.5 |         | V <sub>cc</sub> +0.5 | V    |
| Power Supply Voltage  | V <sub>cc</sub>   | -0.5 |         | 3.6                  | °C   |
| Storage Temperature   | T <sub>S</sub>    | 5    |         | 85                   | °C   |
| Operating Temperature | T <sub>case</sub> | 20   |         | 70                   | °C   |


#### Electrical Characteristics

| Parameter            | Symbol          | Min.  | Typ. | Max.  | Unit | Notes |
|----------------------|-----------------|-------|------|-------|------|-------|
| Power Supply Voltage | V <sub>cc</sub> | 3.135 | 3.3  | 3.465 | V    |       |
| Power Dissipation    | P <sub>D</sub>  |       | 4    | 5     | W    |       |

## Optical Characteristics

| Parameter                   | Symbol           | Min. | Typ.      | Max. | Unit | Notes |
|-----------------------------|------------------|------|-----------|------|------|-------|
| Transmitter                 |                  |      |           |      |      |       |
| Optical Wavelength          | $\lambda_C$      | 1480 | $\lambda$ | 1580 | nm   |       |
| Channel Spacing             | $\Delta f$       |      | 100       |      | GHz  |       |
| Optical Extinction Ratio    | ER               |      | 6         |      | dB   |       |
| Side-Mode Suppression Ratio | SMSR             | 30   |           |      | dB   |       |
| Spectral Width              | $\Delta \lambda$ |      | +/-25     | 1    | GHz  |       |
| Optical Transmit Power      | Pout/lane        | -11  | -10       | -8   | dBm  |       |
| Receiver                    |                  |      |           |      |      |       |
| Optical Wavelength          | $\lambda_C$      | 1480 |           | 1580 | nm   |       |
| Receiver Max. Sensitivity   | Pmin             | -3   | -2.5      | -2   | dBm  |       |
| Damage Threshold            | Pmax             | 10   |           |      | dBm  |       |
| Optical Return Loss         | ORL              |      |           | 20   | dBm  |       |
| LOS Hysteresis              | LOSH             |      | 1.0       |      | dB   |       |
| LOS Assert                  | LOSA             | -10  |           |      | dBm  |       |
| LOS De-Assert               | LOSD             |      |           | -3   | dBm  |       |

### Electrical Pin-out Details

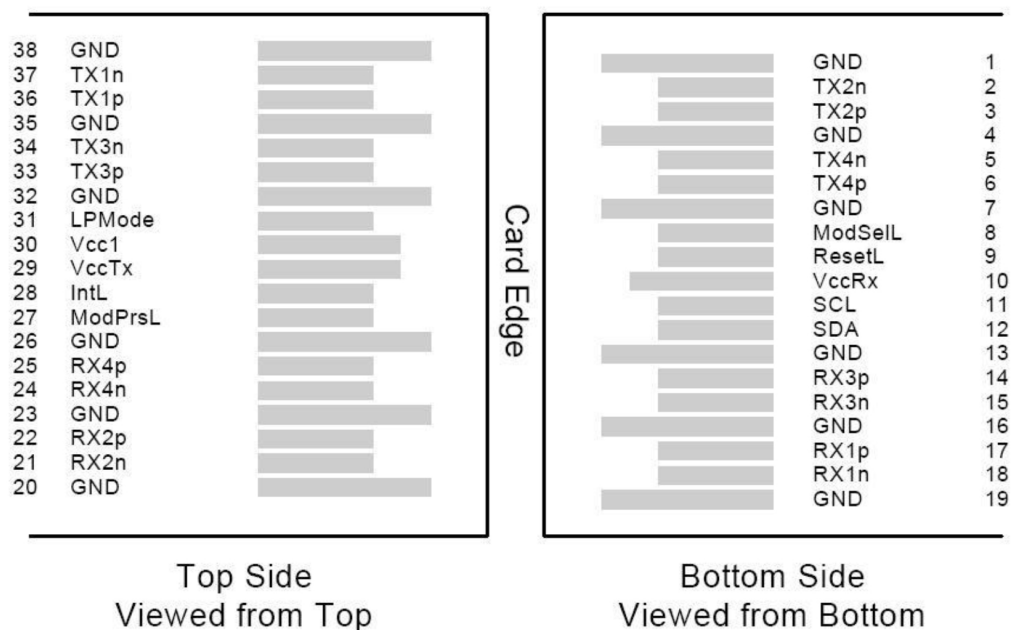

## Pin Descriptions

| Pin | Logic        | Symbol  | Name/Descriptions                    | Plug Sequence | Ref. |
|-----|--------------|---------|--------------------------------------|---------------|------|
| 1   |              | GND     | Ground                               | 1             | 1    |
| 2   | CML-I        | Tx2n    | Transmitter Inverted Data Input      | 3             |      |
| 3   | CML-I        | Tx2p    | Transmitter Non-Inverted Data output | 3             |      |
| 4   |              | GND     | Ground                               | 1             | 1    |
| 5   | CML-I        | Tx4n    | Transmitter Inverted Data Input      | 3             |      |
| 6   | CML-I        | Tx4p    | Transmitter Non-Inverted Data output | 3             |      |
| 7   |              | GND     | Ground                               | 1             | 1    |
| 8   | LVTTTL-I     | ModSelL | Module Select                        | 3             |      |
| 9   | LVTTTL-I     | ResetL  | Module Reset                         | 3             |      |
| 10  |              | VccRx   | +3.3V Power Supply Receiver          | 2             | 2    |
| 11  | LVC MOS- I/O | SCL     | 2-Wire Serial Interface Clock        | 3             |      |
| 12  | LVC MOS- I/O | SDA     | 2-Wire Serial Interface Data         | 3             |      |
| 13  |              | GND     | Ground                               | 1             | 1    |
| 14  | CML-O        | Rx3p    | Receiver Non-Inverted Data output    | 3             |      |
| 15  | CML-O        | Rx3n    | Receiver Inverted Data output        | 3             |      |
| 16  |              | GND     | Ground                               | 1             | 1    |
| 17  | CML-O        | Rx1p    | Receiver Non-Inverted Data output    | 3             |      |
| 18  | CML-O        | Rx1n    | Receiver Inverted Data output        | 3             |      |
| 19  |              | GND     | Ground                               | 1             | 1    |
| 20  |              | GND     | Ground                               | 1             | 1    |
| 21  | CML-O        | Rx2n    | Receiver Inverted Data output        | 3             |      |
| 22  | CML-O        | Rx2p    | Receiver Non-Inverted Data output    | 3             |      |
| 23  |              | GND     | Ground                               | 1             | 1    |
| 24  | CML-O        | Rx4n    | Receiver Inverted Data output        | 3             |      |
| 25  | CML-O        | Rx4p    | Receiver Non-Inverted Data output    | 3             |      |
| 26  |              | GND     | Ground                               | 1             | 1    |
| 27  | LVTTTL-O     | ModPrsL | Module Present                       | 3             |      |
| 28  | LVTTTL-O     | IntL    | Interrupt                            | 3             |      |
| 29  |              | VccTx   | +3.3V Power Supply Transmitter       | 2             | 2    |
| 30  |              | VccI    | +3.3V Power Supply                   | 2             | 2    |
| 31  | LVTTTL-I     | LPMODE  | Low Power Mode                       | 3             |      |
| 32  |              | GND     | Ground                               | 1             | 1    |
| 33  | CML-I        | Tx3p    | Transmitter Non-Inverted Data input  | 3             |      |
| 34  | CML-I        | Tx3n    | Transmitter Inverted Data Input      | 3             |      |
| 35  |              | GND     | Ground                               | 1             | 1    |
| 36  | CML-I        | Tx1p    | Transmitter Non-Inverted Data input  | 3             |      |
| 37  | CML-I        | Tx1n    | Transmitter Inverted Data Input      | 3             |      |
| 38  |              | GND     | Ground                               | 1             | 1    |

**Notes:**


1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
2. VccRx, Vcc1 and VccTx are the receiver and transmitter power supplies and shall be applied concurrently. Requirements defined for the host side of the Host Edge Card Connector are listed in Table 6. Recommended host board power supply filtering is shown in Figures 3 and 4. Vcc Rx Vcc1 and Vcc Tx may be internally connected within the QSFP28 Module in any combination. The connector pins are each rated for a maximum current of 500Ma.

**DOM Specifications**

| Parameter                                      | Min. | Typ. | Max. | Unit |
|------------------------------------------------|------|------|------|------|
| Receive Power Monitor Accuracy                 | -2   |      | 2    | dB   |
| Transmit Power Monitor                         | -2   |      | 2    | dB   |
| Laser Bias Current Monitor Accuracy            | -10  |      | 10   | %    |
| Transceiver Temperature Monitor Accuracy       | -5   |      | 5    | °C   |
| Internally Measured Transceiver Supply Voltage |      |      | 3    | %    |

**Mechanical Specifications**

Measurement unit: mm

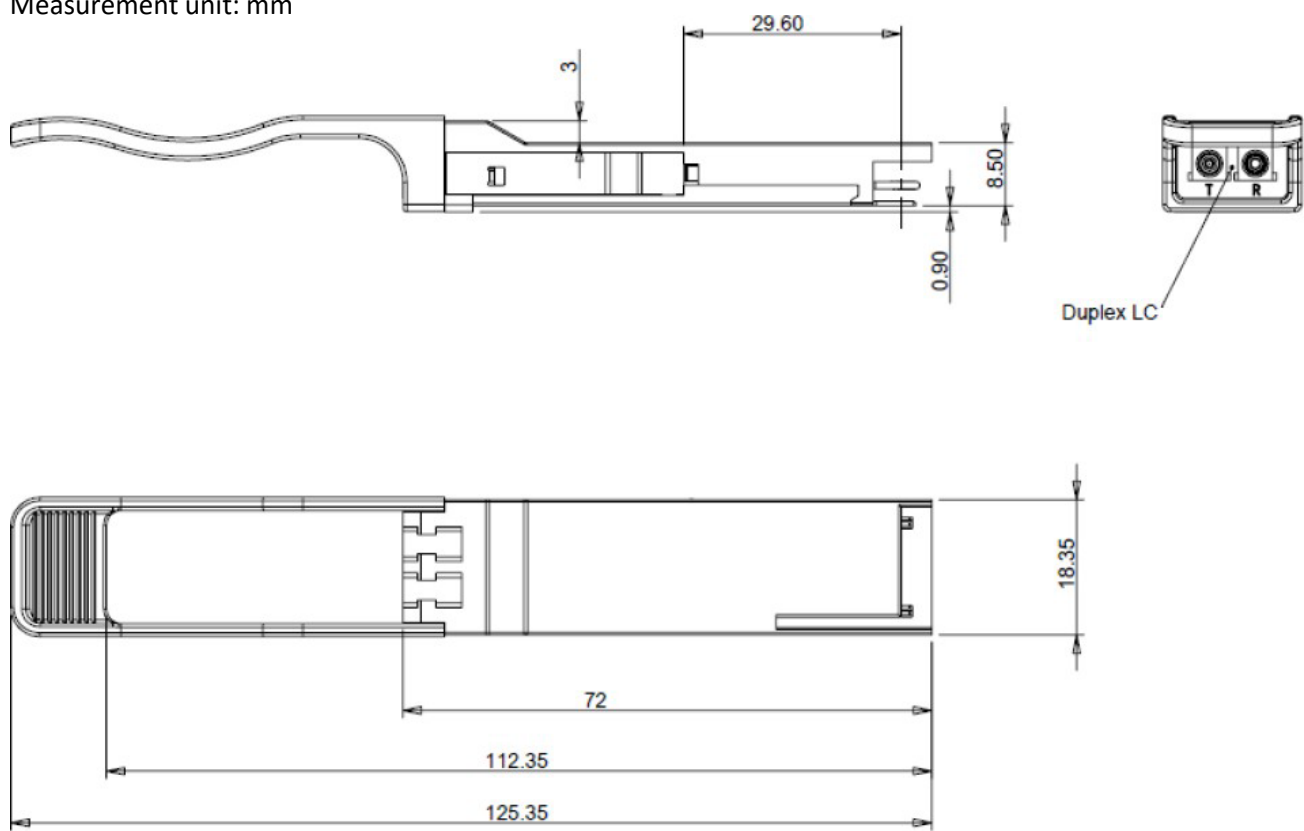

## About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is ingrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.



## U.S. Headquarters

Email: [sales@addonnetworks.com](mailto:sales@addonnetworks.com)

Telephone: +1 877.292.1701

Fax: 949.266.9273

## Europe Headquarters

Email: [salesupportemea@addonnetworks.com](mailto:salesupportemea@addonnetworks.com)

Telephone: +44 1285 842070