

472807A-OPC

Alcatel-Lucent Nokia® 472807A Compatible 3GBase-LR SFP+ Transceiver (SMF, 1310nm, 1.4km, LC)

Features

- SFF-8432 and SFF-8472 Compliance
- Duplex LC Connector
- Uncooled DFB transmitter and PIN receiver
- Single-mode Fiber
- Commercial Temperature 0 to 70 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



Applications:

- 3GBase Ethernet
- Access and Enterprise

Product Description

This Alcatel-Lucent Nokia® 472807A compatible SFP+ transceiver provides 3GBase-LR throughput up to 1.4km over single-mode fiber (SMF) using a wavelength of 1310nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Alcatel-Lucent Nokia® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|----------------------------|-----------------|------|---------|-------------------|------|-------|
| Maximum Supply Voltage | V _{CC} | -0.5 | | 4 | V | 1 |
| Storage Temperature | TS | -40 | | 85 | °C | 2 |
| Operating Case Temperature | T _c | 0 | | 70 | °C | 3 |
| Data Rate | DR | 9.83 | 10.3125 | 11.3 | Gbps | 4 |
| Bit Error Rate | BER | | | 10 ⁻¹² | | |

Notes:

1. For electrical power interface
2. Ambient Temperature
3. Case Temperature
4. IEEE 802.3ae

Link Distances

| Data Rate | Fiber Type | Distance Range (km) |
|-----------------|-------------|---------------------|
| 9.83 –11.3 Gb/s | 9/125um SMF | 2 |

Electrical Characteristics (V_{CC}=3.14V to 3.46V, T_C=-0°C to 70°C)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|--------------------------------------|--------------------------------|-----------------|------|----------------------|------|-------|
| Power Supply Voltage | V _{CC} | 3.14 | 3.30 | 3.46 | V | |
| Power Supply Current | I _{CC} | | 230 | 300 | mA | |
| Transmitter | | | | | | |
| Differential data input swing | V _{IN,pp} | 180 | | 700 | mV | |
| Input differential impedance | R _{IN} | | 100 | | Ω | |
| Transmit Disable Voltage | V _D | 2 | | V _{CC} | V | |
| Transmit Enable Voltage | V _{EN} | V _{EE} | | V _{EE} +0.8 | V | |
| Receiver | | | | | | |
| Differential data output swing | V _{OUT, pp} | 300 | | 850 | mV | |
| Data output rise/fall time (20%-80%) | T _r /T _f | 28 | | | ps | |
| LOS Asset | V _{LOSA} | 2 | | Host_V _{CC} | V | |
| LOS De-Assert | V _{LOSD} | V _{CC} | | V _{CC} +0.5 | V | |

Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|---------------------------------|-------------|-------|------|-------|-------|-------|
| Transmitter | | | | | | |
| Output Optical Power | Ptx | -8.2 | | 0.5 | dBm | 1 |
| Optical Center Wavelength | λ_c | 1260 | 1310 | 1355 | nm | |
| Optical Modulation Amplitude | OMA | -5.2 | | | dBm | 2 |
| Extinction Ratio | ER | 3.5 | | | dB | |
| Side Mode Suppression Ratio | SMSR | 30 | | | dB | |
| Relative Intensity Noise | RIN | | | -128 | dB/Hz | |
| Transmitter Dispersion Penalty | TDP | | | 3.2 | dB | |
| Launch Power of OFF Transmitter | Poff | | | -30 | dBm | 1 |
| Receiver | | | | | | |
| Optical Center Wavelength | λ_c | 1260 | | 1355 | nm | |
| Average Receive Power | Prx | -14.4 | | 0.5 | dBm | |
| Receiver Sensitivity @10.3Gb/s | S | | | -14.4 | dBm | 3 |
| Receiver Reflectance | RL | | | -12 | dB | |
| LOS Assert | LOSA | -30 | | | dBm | |
| LOS De-Assert | LOSD | | | -15 | dBm | |
| LOS Hysteresis | LOSH | 0.5 | | | dB | |

Notes:


1. Average.
2. According to IEEE 802.3ae requirement.
3. Average. Test the resulting value using the minimum ER value within the defined range: $BER < 10^{-12}$, PRBS $2^{31}-1$.

Pin Descriptions


| Pin | Symbol | Name/Descriptions | Ref. |
|-----|------------|---|------|
| 1 | VeeT | Transmitter Ground (Common with Receiver Ground). | 1 |
| 2 | Tx_Fault | Transmitter Fault. | 2 |
| 3 | Tx_Disable | Transmitter Disable. Laser output disabled on “high” or “open.” | 3 |
| 4 | SDA | 2-Wire Serial Interface Data Line. | 4 |
| 5 | SCL | 2-Wire Serial Interface Clock Line. | 4 |
| 6 | MOD_ABS | Module Absent. Grounded within the module. | 4 |
| 7 | RS0 | No connection required. | |
| 8 | LOS | Loss of Signal indication. Logic 0 indicates normal operation | 5 |
| 9 | RS1 | No connection required. | 1 |
| 10 | VeeR | Receiver Ground (Common with Transmitter Ground). | 1 |
| 11 | VeeR | Receiver Ground (Common with Transmitter Ground). | 1 |
| 12 | RD– | Receiver Inverted Data Out. AC Coupled. | |
| 13 | RD+ | Receiver Non-Inverted Data Out. AC Coupled. | |
| 14 | VeeR | Receiver Ground (Common with Transmitter Ground). | 1 |
| 15 | VccR | Receiver Power Supply | |
| 16 | VccT | Transmitter Power Supply | |
| 17 | VeeT | Transmitter Ground (Common with Receiver Ground). | 1 |
| 18 | TD+ | Transmitter Non-Inverted Data In. AC Coupled. | |
| 19 | TD– | Transmitter Inverted Data In. AC Coupled. | |
| 20 | VeeT | Transmitter Ground (Common with Receiver Ground). | 1 |

Notes:



1. Circuit ground is isolated from the chassis ground.
2. Tx_Fault is the open collector output and should be pulled up with 4.7kΩ-10kΩ on the host board to a voltage between 2V and Vcc+0.3V.
3. Disabled: T_{DIS}>2V or open, enabled: T_{DIS}<0.8V.
4. Should be pulled up with 4.7kΩ-10kΩ on the host board to a voltage between 2V and Vcc+0.3V.
5. LOS is an open collector output and should be pulled up with 4.7kΩ-10kΩ on the host board to a voltage between 2V and Vcc+0.3V. The logic "0" indicates normal operation, and the logic "1" indicates that the receiver signal is lost.

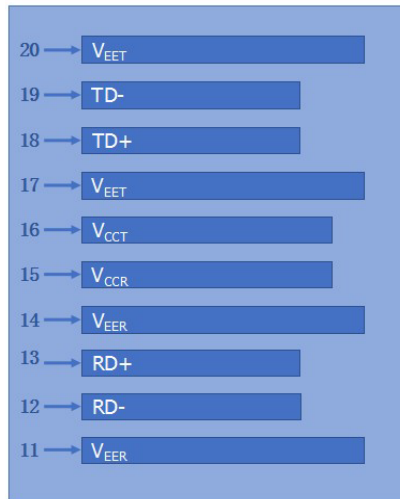

Top of Board

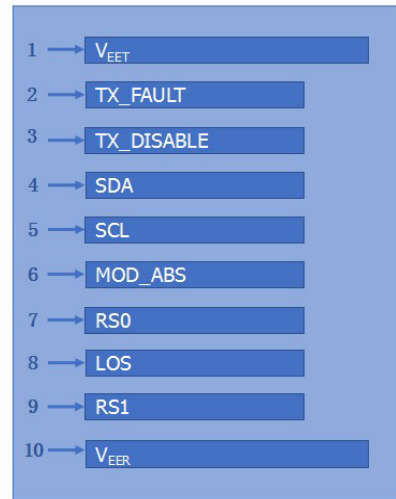


Bottom of Board

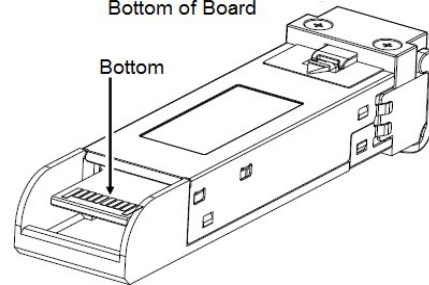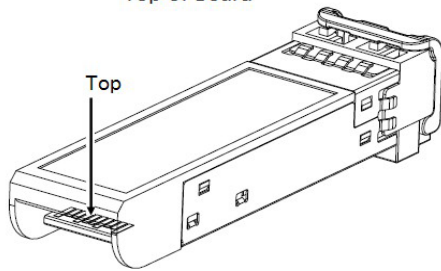


Pin-out of connector Block on Host board

Block Diagram

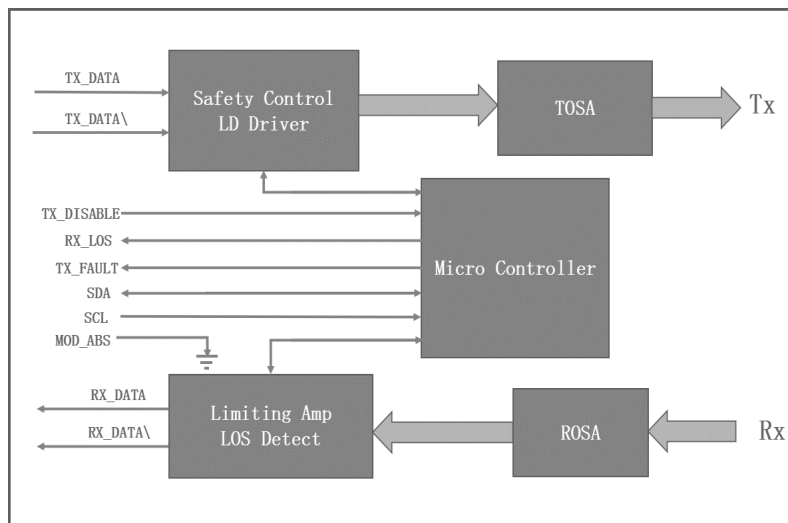

Mechanical Specifications

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

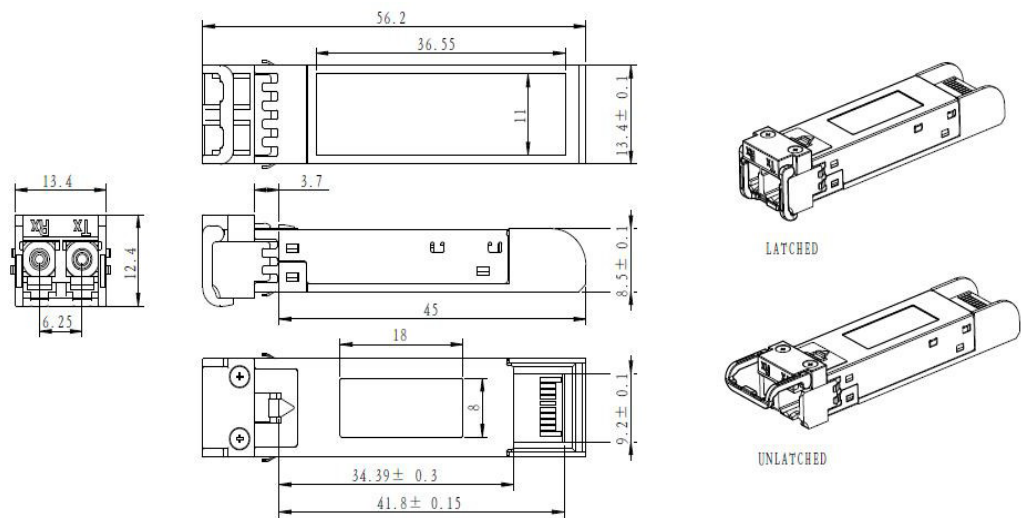

ALL DIMENSIONS ARE ±0.2mm UNLESS OTHERWISE SPECIFIED
UNIT: mm

EEPROM Information

EEPROM memory map specific data field description is as below:

| 2 wire address 1010000X (A0h) | 2 wire address 1010001X (A2h) |
|---|---|
| 0 | 0 |
| Serial ID Defined by SFP MSA (96 bytes) | Alarm and Warning Thresholds (56 bytes) |
| 95 | 55 |
| Vendor Specific (32 bytes) | Cal Constants (40 bytes) |
| 127 | 95 |
| Reserved, SFF8079 (128 bytes) | Real Time Diagnostic Interface (24 bytes) |
| | 119 |
| | 127 |
| | Vendor Specific (8 bytes) |
| | User Writable EEPROM (120 bytes) |
| | 247 |
| | 255 |
| | Vendor Specific (8 bytes) |