


C-ASC-LC-15M9SMF

15m ASC to LC Yellow OS2 Duplex OFNR (Riser-Rated) SMF Fiber Patch Cable

Features

- 1xASC Male to 1xLC Male Connectors
- 9/125 Patch cable
- OFNR
- Yellow Jacket Color
- OS2 Rated
- Insertion Loss $\leq 0.3\text{dB}$
- Return Loss $\geq 60\text{dB}$

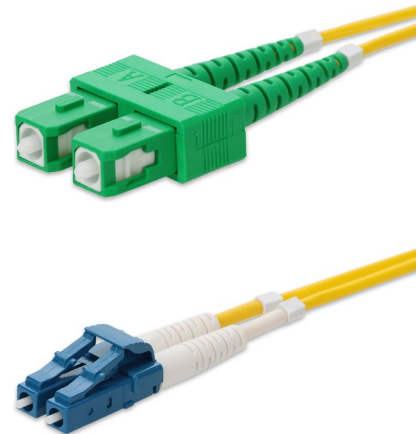


Product Description

This is a 15m ASC to LC Yellow OS2 Duplex OFNR (Riser-Rated) SMF Fiber Patch Cable. OS2 fiber optic cable is a high-performance single-mode fiber designed for long-distance data transmission, making it ideal for businesses requiring reliable and fast network connections over longer distances up to 200kilometers. With low signal loss and the ability to support 1G to 100G speeds, ensuring efficient communication across offices, data centers, or industrial facilities. OFNR riser fiber cable jackets are designed for vertical installations in building risers, providing fire-resistant protection to ensure safe data transmission between floors. These cables meet strict safety standards, making them ideal for businesses that need reliable, in-building network infrastructure without the risk of fire spreading through conduits. The Standard Boot option provides reliable and straightforward connections for fiber cables, making it an economical choice for various networking applications. Ideal for businesses that require dependable performance without the complexity, this option ensures consistent data transmission in everyday network setups. Our cables are TIA compliant, ensuring performance for all networking needs.

Specifications

| Parameter | Specifications |
|-------------------------------|--------------------------------------|
| Environment | Indoor |
| Standard | OS2 |
| Fiber Type | SMF |
| Connector | ASC (Male) to LC (Male) |
| Color | Yellow |
| Shielded | No |
| Strand Count | 2 |
| Cable Mode | Duplex |
| Jacket Type | Riser |
| Termination Type | Crossover |
| Core/Cladding | 9/125 μ m |
| Fiber Termination | APC - Angled Physical Contact |
| Polarity | Type A-B |
| Cable Type | OS2 |
| Armored | No |
| Bend Insensitivity | G.657.A1 |
| Connector 1 Ferrule Polish | APC (Angled Physical Contact) |
| Connector 2 Ferrule Polish | UPC (Ultra Physical Contact) |
| Insertion Loss Grade | Grade C |
| Fire Rating | Riser (OFNR) |
| Jacket Material | PVC (Polyvinyl Chloride) |
| Outer Diameter | 2.0mm |
| Connector 1 Boot Style | Standard Boot |
| Connector 2 Boot Style | Standard Boot |
| Connector 1 Color | Green |
| Connector 2 Color | Blue |
| Insertion Loss | ≤ 0.3 dB |
| Return Loss | ≥ 60 dB APC ≥ 60 dB UPC |
| Cable Tolerance | |
| Cable Length < 1M | 5cm |
| 1M \leq Cable Length < 15M | 10cm |
| 15M \leq Cable Length < 30M | 15cm |
| Cable Length ≥ 30 M | Cable Length* 1% |

Mechanical Specifications

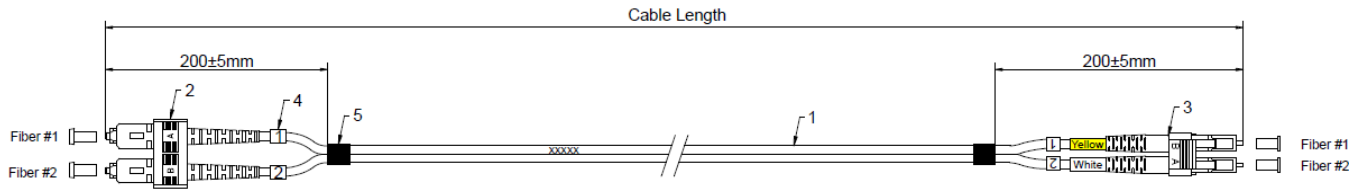

| Item | Quantity | Specifications |
|------|----------|--|
| 1 | A/R | OD: 2.0mm, Single-Mode 9/125µm G657A1, Duplex, Fiber Optic Cable, PVC, Color: Yellow |
| 2 | 1 | SC/APC SM 2.0mm Duplex Connector, Green Housing, Green Boot, With Clip |
| 3 | 4 | LC/UPC SM 2.0mm Duplex Connector, Blue Housing, 19mm Short White Boot |
| 4 | 1 | Cable Marker |
| 5 | 2 | Black Shrinkage Tube |

About ProLabs

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salesupport@prolabs.com

Telephone: +44 1285 719 600