

Casper Pendant

Overview

CASPER COLLECTION



Specifications

LIGHTING	Integrated LED light source offering high lumen output and efficacy. Color consistency of 3 SDCM. See additional information summarizing lumen distribution, wattage, and efficacy on following pages. Tunable white and RGB options available.	CERTIFICATION	Luminaire is CSA listed conforming to UL Standard 1598 in the U.S. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. Damp Location Rated. All electronic components are RoHS compliant, and the mechanical components of the luminaire have been verified to meet RoHS Directive 2002/95/EC.
LUMEN MAINTENANCE	Reported TM-21 Lifetimes L90(17k) = 52,600 hours L80(17k) > 102,000 hours L90(17k) > 102,000 hours	CLEANING & CARE	Designed to withstand the demands of rigorous cleaning requirements. Effective cleaning and disinfection of environmental surfaces reduces microbe transmission. Superior chemical resistance and durability promotes safety in any design application. Use common disinfectants and cleaners to reduce microbe transmission.
DIFFUSION	Frosted optical diffuser produces even illumination.	WARRANTY	5 year warranty on all standard components.
MOUNTING	Adjustable stainless steel aircraft cable, contact studio for lengths over 20'		
DRIVERS	120-277V constant current, dimming driver standard. Can be wired dimming or non-dimming. 0-10v dimming input with a range of 1%-100%. Dim-to-Off standard. Driver can be accessed from the fixture. Power factor of > .95. Total Harmonic Distortion (THD) of < 20%.		




Casper Pendant

Fixture Options

CASPER COLLECTION


DIMENSIONS

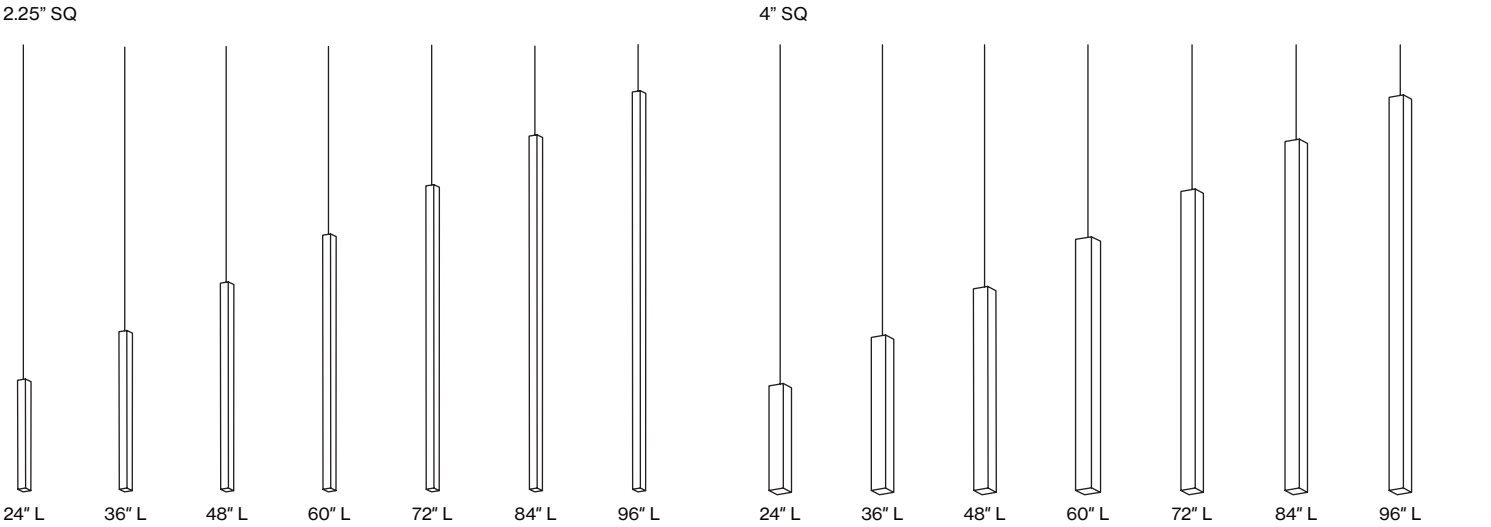


MATERIAL




CEILING CONNECTION

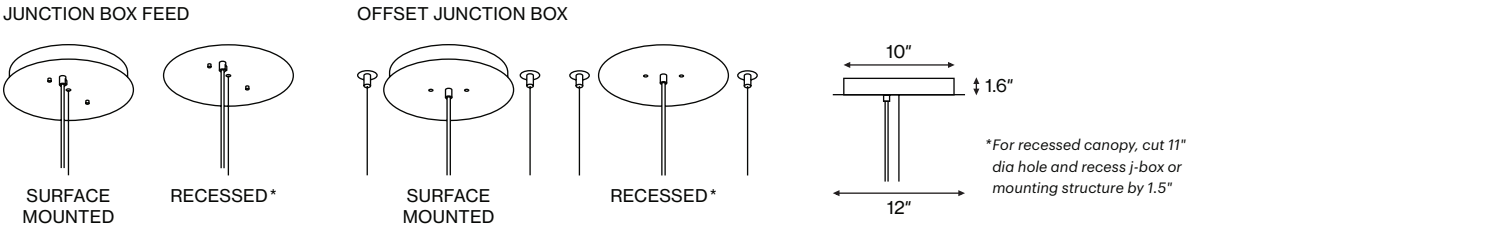

4\"/>

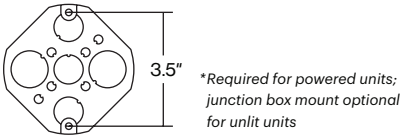

4\"/>




Casper Pendant

Lighting Details

CASPER COLLECTION

LIGHT DISTRIBUTION
Consult factory or lightart.com for IES files, tested in accordance with IESNA LM79

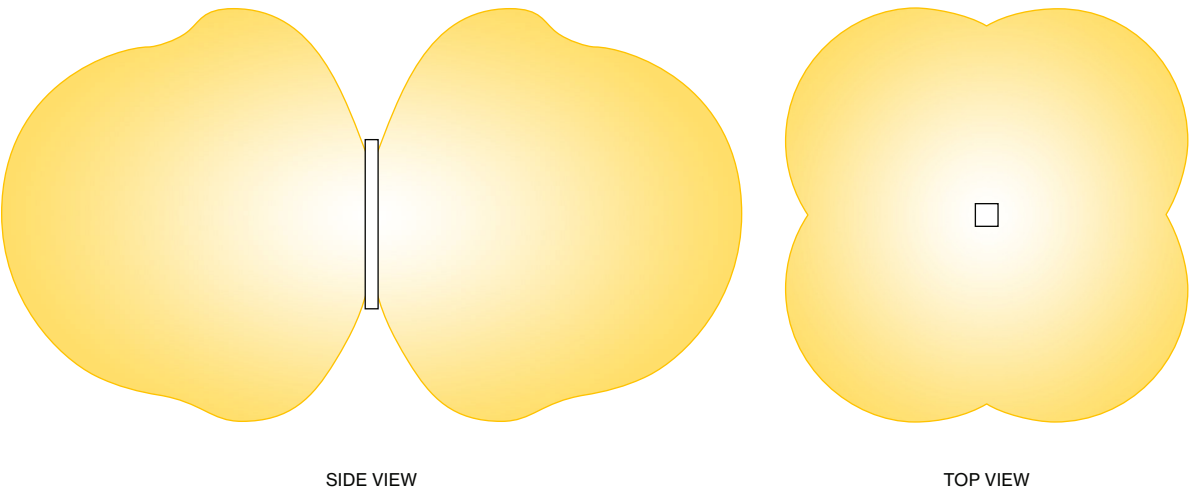

PERFORMANCE – 2" SQ PENDANT
Based on 3500K / 90CRI

NOMINAL LUMEN OUTPUT (LM/FT)	INPUT POWER (W/FT)	EFFICACY (LM/W)
250	2.38	118
350	3.33	118
450	4.29	118
550	5.25	118
650	6.12	120
750	7.03	120
850	8.03	120
950	8.98	120
1050	9.60	122

PERFORMANCE – 4" SQ PENDANT
Based on 3500K / 90CRI

NOMINAL LUMEN OUTPUT (LM/FT)	INPUT POWER (W/FT)	EFFICACY (LM/W)
250	2.38	118
350	3.33	120
450	4.30	120
550	5.25	120
650	6.11	122
750	7.02	122
850	8.02	122
950	8.97	122
1050	9.69	122

LIGHT DISTRIBUTION
Based on measurement data

COLOR TEMPERATURE / CRI	MULTIPLIER
2700K / 80	0.98
2700K / 90	0.93
3000K / 80	1.02
3000K / 90	0.97
3500K / 80	1.00
3500K / 90	1.00
4000K / 80	1.08
4000K / 90	1.03

OUTPUT MULTIPLIERS INSTRUCTIONS

Adjusted Value = $L_1 \times C_m$ where:
 L_1 = (Lumen output at 3500K / 90 CRI) ×
 C_m = (Color Temp. / CRI Multiplier)
Example:
850LM / 3000K / 80CRI
(850) × (1.02) = 867LM



Casper Pendant

Part Number Specification

CASPER COLLECTION

SPECIFICATION CODE

Example: 2 QTY COL-CASPR-PEND-24L-4SQ-STD-830CK-450LM-P01-WPC-WH

	COL-CASPR-PEND-		-		-		-		-		-		-		-	
QTY.		1		2		3		4		5		6		7		8

Complete form to order Casper fixture(s). For each number, make one selection and enter in the corresponding box above.

*Indicates modified choices; additional lead times, cost, and limited lumen outputs may apply.

1 LENGTH (Nominal)

- | | |
|------------------------------|--|
| ☐ 24L | 24" LENGTH
<i>Not available under 350 LM/FT</i> |
| ☐ 36L | 36" LENGTH |
| ☐ 48L | 48" LENGTH |
| ☐ 60L | 60" LENGTH |

- | | |
|------------------------------|------------|
| ☐ 72L | 72" LENGTH |
| ☐ 84L | 84" LENGTH |
| ☐ 96L | 96" LENGTH |

2 SIZE (Nominal)

- | | |
|------------------------------|--------------|
| ☐ 2SQ | 2.25" SQUARE |
| ☐ 4SQ | 4" SQUARE |

3 SUSPENSION

- | | |
|-------------------------------|------------|
| ☐ STD | 12" – 96" |
| ☐ EXT* | 12" – 240" |

4 LED CRI / CCT

- | | |
|--------------------------------|----------------|
| ☐ 827CK | 80 CRI / 2700K |
| ☐ 830CK | 80 CRI / 3000K |
| ☐ 835CK | 80 CRI / 3500K |
| ☐ 840CK | 80 CRI / 4000K |
| ☐ 927CK | 90 CRI / 2700K |
| ☐ 930CK | 90 CRI / 3000K |
| ☐ 935CK | 90 CRI / 3500K |
| ☐ 940CK | 90 CRI / 4000K |
| ☐ TW | TUNABLE WHITE |
| ☐ RGB | RGB |

5 OUTPUT

- | | |
|---------------------------------|--|
| ☐ 250LM | 250 LM/FT TW available in 36L, 48L, 60L, 72L, 84L, 96L |
| ☐ 350LM | 350 LM/FT TW available in all lengths |
| ☐ 450LM | 450 LM/FT TW available in all lengths |
| ☐ 550LM | 550 LM/FT TW available in all lengths |
| ☐ 650LM | 650 LM/FT TW available in all lengths |
| ☐ 750LM | 750 LM/FT TW available in 24L, 36L, 48L, 60L, 72L, 84L |
| ☐ 850LM | 850 LM/FT TW available in 24L, 36L, 48L, 60L, 72L |
| ☐ 950LM | 950 LM/FT TW available in 24L, 36L, 48L, 60L |
| ☐ 1050LM | 1050 LM/FT TW not available |
| ☐ RGBO | RGB OUTPUT |
| ☐ CU* | CUSTOM OUTPUT
Specify value from 250 to 1050 lm/ft |

6 DIMMING AND CONTROLS

- | | |
|-------------------------------|--|
| ☐ P01 | 0–10V 1% DIMMING |
| ☐ LEC* | HI-LUME 1% ECOSYSTEM
LED DRIVER SOFT ON,
FADE TO BLACK (LDE1 SERIES) |
| ☐ DMX | RGB CONTROL |
| ☐ DALI | DALI CONTROL |

7 CANOPY OPTIONS

- | | |
|-------------------------------|----------------|
| ☐ WPC | WHITE |
| ☐ BPC | BLACK |
| ☐ RWPC | RECESSED WHITE |
| ☐ RBPC | RECESSED BLACK |

8 POWER CORD

- | | |
|-----------------------------|-------|
| ☐ WH | WHITE |
| ☐ BK | BLACK |

_____ lm/ft

*Indicates modified choices; additional lead times and/or costs may apply.

