



Specifications

LIGHTING	E26 base, A19 Lamp, Dimmable 9.5W LED lamp model also available. Source lumens 800, 120V	CERTIFICATION	CSA certified to CSA C22.2 No. 250.0, and conforms to UL standard 1598. PoE Compatible fixtures meet UL 2108.
PHOTOMETRICS	Consult factory or website for IES files, tested in accordance with IESNA LM79.	CLEANING & CARE	The best way to remove airborne debris and dust from shades is to periodically vacuum. A Swiffer sheet or feathered duster can also be used for light dusting.
HARDWARE	TGIC-free powder coat. Stainless steel cables with nickel-plated cable gripper allows for adjustable hanging height. Made with RoHS compliant parts.		
MOUNTING	Adjustable stainless steel aircraft cable, contact studio for lengths over 20'		
ELECTRICAL	Emergency battery output: 6 watts for 90 minutes Maximum Mounting height: 10.5ft. Compatible with Signify Bodine sinusoidal output emergency lighting inverters. Signify Bodine inverters allow designated lighting fixtures to serve as code compliant emergency lighting sources during failure of normal AC power. For additional information see link: http://www.bodine.com/products/inverter.html		



French Curve

Fixture Options

CONTOUR COLLECTION


DIMENSIONS



14" DIA × 14" H



18" DIA × 24" H

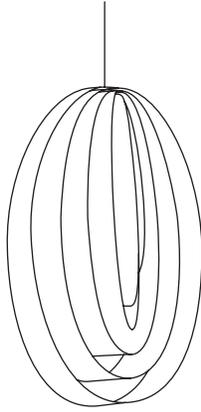


24" DIA × 36" H


CEILING CONNECTION

STANDARD CANOPY


For recessed canopy, cut 6" diameter hole and recess j-box or mounting structure by 1.5"



SURFACE MOUNTED




RECESSED*




6.25"

ULTRA SHALLOW CANOPY (E26 ONLY)




SURFACE MOUNTED




6.5"

EM BATTERY OPTION ONLY


For recessed canopy, cut 6" diameter hole and recess j-box or mounting structure by 1.5"



SURFACE MOUNTED




RECESSED*



12"

4" OCTAGONAL JUNCTION BOX* (BY OTHERS)



*Required for powered units; junction box mount optional for unlit units

CANOPY / DRESS PLATE FINISH OPTIONS



BLACK



WHITE

COLOR OPTIONS



VEIL PURE



TRANSLUCENT SUEDE

*Hundreds of colors available. Contact us for samples and more information.



MADE IN USA WITH GLOBAL AND DOMESTIC PRODUCTS

French Curve

Part Number Specification

CONTOUR COLLECTION

SPECIFICATION CODE

Example: 2 QTY COL-CON-FRCU-27D-VP-9.5W-STD-WPC-WH

COL-CON-FRCU------

QTY. 1 2 3 4 5 6

Complete form to order Contour French Curve fixture(s). For each number, make one selection and enter in the corresponding box above.

*Indicates modified choices; additional lead times and/or costs may apply.

1 DIAMETER

- 14D SMALL 14" Dia x 14" H
- 18D MEDIUM 18" Dia x 24" H
- 24D LARGE 24" Dia x 36" H

2 MATERIAL

- VP VEIL PURE
- TS TRANSLUCENT SUEDE
- CUST* CUSTOM COLOR

3 LED CRI/CCT

- 9.5W 9.5W 800LM / 3000K / 120V

4 SUSPENSION

- STD 12" - 96"
- EXT* 12" - 240"

5 CANOPY OPTIONS

- WPC WHITE
- BPC BLACK
- RWPC RECESSED WHITE
- RBPC RECESSED BLACK

6 POWER CORD Cord color dictates visible metal color

- WH WHITE
- BK BLACK