

Acoustic Dial Open

Overview

ACOUSTIC COLLECTION



Specifications

SHADES 9mm thick Sola Felt is a PET material, manufactured with 50% post-consumer recycled content. Sola Felt is a LBC Red List Free labeled product, eligible for LEED, Living Building Challenge, and other green building certification credits. Frosted acrylic diffuser tube with removable acrylic bottom diffuser at bottom (for changing optic kits or relamping E26 version). Contact your local sales rep for material samples.	HARDWARE TGIC-free powder coat. Stainless steel cables with nickel-plated cable gripper allows for adjustable hanging height. Made with RoHS compliant parts.
CONSTRUCTION 1/16" 3form Varia. White Opal top and bottom difuser. 9mm thick PET felt manufactured with 50% post-consumer recycled content. Contact your local rep for material samples.	MOUNTING Canopy mounts to 4" octagonal junction box or appropriate alternative. Adjustable stainless steel aircraft cable, contact studio for lengths over 20'.
LIGHTING Solid state LED system 120v-277v input 0-10v dimming compatible	WARRANTY 5 year warranty on all standard components. LED system rated for operation in ambient environments up to 25°C. Suitable for Dry or Damp locations. Indoor use only
LUMEN MAINTENANCE Reported: L90: >55,000 hours Calculated: L70: >180,000 hours L80: >120,000 hours EPA TM21 calculator derived	CERTIFICATION CSA certified to CSA C22.2 No. 250.0, and conforms to UL standard 1598.
PHOTOMETRICS Consult factory or website for IES files, tested in accordance with IESNA LM79.	CLEANING & CARE The best way to remove airborne debris and dust from shades is to periodically vacuum. A Swiffer sheet or feathered duster can also be used for light dusting. To treat liquid stains, remove spills immediately with a clean damp cotton cloth or with detergent soap and warm water. Carpet and fabric cleaners can usually be used. Always test an inconspicuous area before applying cleaners to the actual stain.




Acoustic Dial Open

Fixture Options


ACOUSTIC COLLECTION

DIMENSIONS All pendants have a 11.5" Height.


FIN STYLE A



37" DIAMETER
27LBS




45" DIAMETER
39LBS




59" DIAMETER
65LBS


FIN STYLE B



37" DIAMETER
27LBS




45" DIAMETER
39LBS




59" DIAMETER
65LBS


FIN STYLE C



37" DIAMETER
27LBS



45" DIAMETER
39LBS




59" DIAMETER
65LBS


CEILING CONNECTIONS

37" DIAMETER


Available in both Recessed and Surface Mount canopies. For recessed canopy, cut 11" dia hole and recess j-box or mounting structure by 1.5".



CABLES TO CEILING




CABLES TO CANOPY





45" DIAMETER | 59" DIAMETER

7000+ lumens available only with Ultra Shallow Canopy.




CABLES TO CEILING



ULTRA SHALLOW CANOPY

4" OCTAGONAL JUNCTION BOX (BY OTHERS)




Required for powered units;
optional for unlit units

CANOPY/DRESS PLATE FINISH OPTIONS



BLACK



WHITE

Acoustic Dial Open

Fixture Options

ACOUSTIC COLLECTION

VARIA COLORS OPTIONS OPTIONS




GESO



NATURAL



SILKEN
OYSTER



CINDER



CUSTOM



VITAMIN C



CRANBERRY
X2



WIZARD




MIDCENTURY
ROSEWOOD

FELT COLOR & PATTERN OPTIONS

COLOR OPTIONS



EBONY



CAST



MINERAL



STEEL



ARMOR



NICKEL




ZINC



NIGHTFALL



ADMIRAL



DUSK



STEELBLUE



PLATINUM



OCHRE




MUSTARD



LILAC



BURGUNDY



CINNAMON



SAFFRON



JASPER




ARIES



CITRINE



EMERALD




SILT



DRIFTWOOD




DUNE



VANILLA


PATTERN OPTIONS



WALNUT



IRON OAK



CARMEL OAK



RICH BAMBOO




Acoustic Dial Open

Lighting Details

ACOUSTIC COLLECTION

LIGHT DISTRIBUTION OPTIONS

Consult factory or lightart.com for IES files, tested in accordance with IESNA LM79

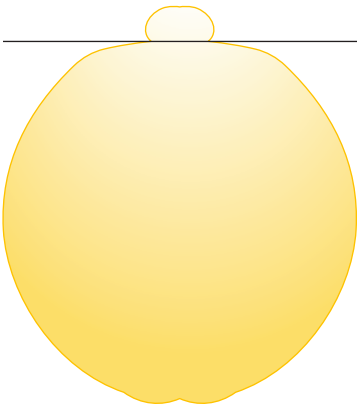

SIDE VIEW

LIGHT DISTRIBUTION

Based on measurement data

COLOR TEMPERATURE / CRI	MULTIPLIER
2700K / 80	0.98
2700K / 90	0.93
3000K / 80	1.02
3000K / 90	0.97
3500K / 80	1.00
3500K / 90	1.00
4000K / 80	1.08
4000K / 90	1.03

OUTPUT MULTIPLIERS INSTRUCTIONS

Adjusted Value = $L_1 \times C_m$ where:

L_1 = (Lumen output at 3500K / 90 CRI) ×

C_m = (Color Temp. / CRI Multiplier) ×

Example:

850LM / 3000K / 80CRI

$(850) \times (1.02) = 789LM$

Acoustic Dial Open

Lighting Details

ACOUSTIC COLLECTION

PERFORMANCE – ACOUSTIC DIAL 37"
Based on 3500K / 90CRI / Standard Distribution

NOMINAL LUMEN OUTPUT (LM)	INPUT POWER (W)	EFFICACY (LM/W)
1000	13.85	72.20
2000	28.83	69.40
3000	46.33	64.80
4000	66.48	60.20

PERFORMANCE – ACOUSTIC DIAL 45"
Based on 3500K / 90CRI / Standard Distribution

NOMINAL LUMEN OUTPUT (LM)	INPUT POWER (W)	EFFICACY (LM/W)
1000	12.78	90.00
2000	25.96	86.70
3000	40.51	83.30
4000	56.33	79.90
5000	90.82	74.30
6000	90.82	74.30

PERFORMANCE – ACOUSTIC DIAL 59"
Based on 3500K / 90CRI / Standard Distribution

NOMINAL LUMEN OUTPUT (LM)	INPUT POWER (W)	EFFICACY (LM/W)
1000	11.19	102.70
2000	39.55	101.10
3000	33.92	99.50
4000	45.97	97.90
5000	58.42	96.30
6000	71.33	94.60
7000	84.74	46.50
8000	49.33	91.20
9000	56.55	89.50
10000	64.07	87.80
11000	71.90	86.10

Acoustic Dial Open

Acoustic Details

ACOUSTIC COLLECTION

SABINS PER FIXTURE *Equivalent square feet of perfect absorption*

CENTER FREQUENCY (HZ)	59" DIAMETER 150 FINS	45" DIAMETER 106 FINS	37" DIAMETER 80 FINS
100	5.51	1.57	2.00
125	12.42	5.99	3.25
160	5.31	3.80	3.63
200	5.18	3.87	3.51
250	7.74	4.56	4.09
315	11.45	8.92	7.00
400	15.64	11.29	9.26
500	23.62	16.96	13.73
630	24.47	18.60	14.62
800	25.51	18.95	15.88
1000	29.09	21.65	17.17
1250	31.19	22.52	18.28
1600	33.72	23.96	19.29
2000	36.10	25.44	20.13
2500	36.56	26.12	20.89
3150	36.80	26.61	21.28
4000	37.40	26.98	21.74
5000	37.13	26.92	21.45
AVERAGE OF 250, 500, 1000, 2000 HZ	24.14	17.15	13.78
NRC PER FIXTURE (CIRCULAR FOOTPRINT)	2.30	3.50	5.20
EQUIVALENT SQ FT OF ACT (NRC 0.90)	26.82	19.06	15.31
EQUIVALENT SQ FT OF ACT (NRC 0.70)	34.48	24.50	19.69


Absorption

NRC per Fixture: 1.20
Absorption per Fixture: 7.59–15.50 Sabins

*Average of values taken at
250, 500, 1000, and 2000 Hz*

*The acoustic testing of Dial was conducted at
NVLAP accredited laboratories and meets ISO 354
and ASTM C423. Formal test reports are available
upon request.*

- 59 DIA 150 FINS
- 45 DIA 106 FINS
- 37 DIA 80 FINS

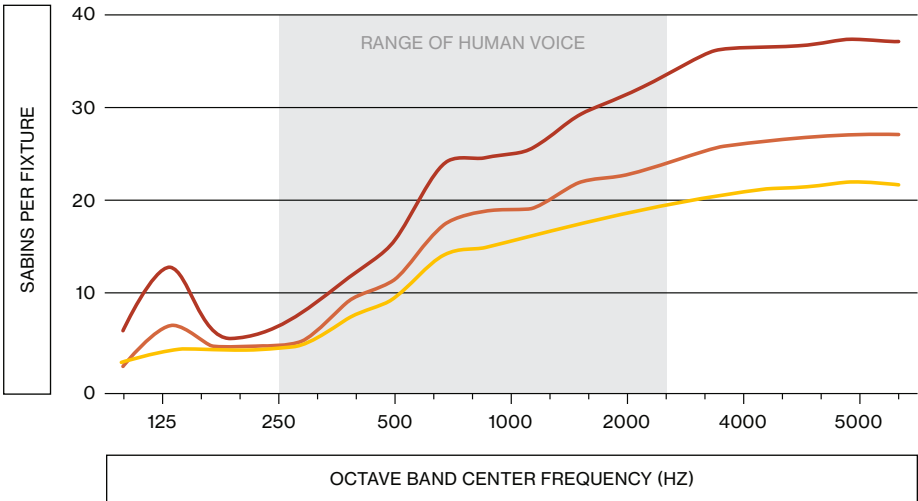

Acoustic Dial Open

Part Number Specification

ACOUSTIC COLLECTION

SPECIFICATION CODE

Example: 2 QTY ACC-DIAL-OPEN-45D-A-GO-JP-STD-940CK-5000LM-P01-WPC-WH-CCL

	ACC-DIAL-OPEN	-		-		-		-		-		-		-		-		-		-		-	
QTY.			1		2		3		4		5		6		7		8		9		10		11

Complete form to order Acoustic Dial Open fixture(s). For each number, make one selection and enter in the corresponding box above.

*Indicates modified choices; additional lead times, cost, and limited lumen outputs may apply.

1 DIAMETER

- | | |
|------------------------------|--------------|
| ☐ 37D | 37" DIAMETER |
| ☐ 45D | 45" DIAMETER |
| ☐ 59D | 59" DIAMETER |

2 STYLE All fins 11.5" in height

- | | | | |
|----------------------------|----------------------------------|----------------------------------|----------------------------------|
| ☐ A | ☐ STYLE A | ☐ STYLE B | ☐ STYLE C |
| ☐ B | | | |
| ☐ C | | | |

3 MATERIAL

- | | | | |
|------------------------------|--|-------------------------------|--|
| ☐ GO | ☐ GESSO | ☐ VC | ☐ VITAMIN C |
| ☐ NL | ☐ NATURAL | ☐ WZ | ☐ WIZARD |
| ☐ CR | ☐ CINDER | ☐ MCR | ☐ MIDCENTURY ROSEWOOD |
| ☐ SO | ☐ SILKEN OYSTER | ☐ CUST | ☐ CUSTOM COLOR |
| ☐ CB2 | ☐ CRANBERRY X2 | | |

4 FELT COLOR

COLOR OPTIONS

- | | |
|------------------------------|------------------------------------|
| ☐ EB | ☐ EBONY |
| ☐ NF | ☐ NIGHTFALL |
| ☐ CA | ☐ CAST |
| ☐ SLT | ☐ SILT |
| ☐ ML | ☐ MINERAL |
| ☐ STL | ☐ STEEL |
| ☐ AR | ☐ ARMOR |
| ☐ NI | ☐ NICKEL |
| ☐ ZN | ☐ ZINC |

- | | |
|------------------------------|-----------------------------------|
| ☐ EM | ☐ EMERALD |
| ☐ BU | ☐ BURGUNDY |
| ☐ CI | ☐ CINNAMON |
| ☐ JP | ☐ JASPER |
| ☐ SF | ☐ SAFFRON |
| ☐ OCH | ☐ OCHRE |
| ☐ MU | ☐ MUSTARD |
| ☐ AS | ☐ ARIES |
| ☐ CT | ☐ CITRINE |

- | | |
|------------------------------|------------------------------------|
| ☐ LC | ☐ LILAC |
| ☐ AD | ☐ ADMIRAL |
| ☐ DK | ☐ DUSK |
| ☐ STB | ☐ STEELBLUE |
| ☐ PT | ☐ PLATINUM |
| ☐ DW | ☐ DRIFTWOOD |
| ☐ DN | ☐ DUNE |
| ☐ VL | ☐ VANILLA |

PATTERN OPTIONS

- | | |
|------------------------------|--------------------------------------|
| ☐ DWA | ☐ WALNUT |
| ☐ IOK | ☐ IRON OAK |
| ☐ WA | ☐ CARMEL OAK |
| ☐ BA | ☐ RICH BAMBOO |

CONTINUE TO NEXT PAGE TO COMPLETE SPECIFICATION

align Declare.



Acoustic Dial Open

Part Number Specification

ACOUSTIC COLLECTION

CONTINUE SPECIFICATION

5 SUSPENSION

- | | |
|------------------------------|------------|
| ☐ STD | 12" – 96" |
| ☐ EXT | 12" – 240" |

6 LED CRI / CCT

- | | | | |
|--------------------------------|----------------|--------------------------------|--|
| ☐ 827CK | 80 CRI / 2700K | ☐ 927CK | 90 CRI / 2700K |
| ☐ 830CK | 80 CRI / 3000K | ☐ 930CK | 90 CRI / 3000K |
| ☐ 835CK | 80 CRI / 3500K | ☐ 935CK | 90 CRI / 3500K |
| ☐ 840CK | 80 CRI / 4000K | ☐ 940CK | 90 CRI / 4000K |
| | | ☐ TW | TUNABLE WHITE
<i>Driver selection limited to P01 and DALI</i> |

7 OUTPUT

- | | | | |
|---------------------------------|---|----------------------------------|---|
| ☐ 1000LM | 1000 LM | ☐ 7000LM | 7000 LM 59"D Max EM Batt and TW |
| ☐ 2000LM | 2000 LM | ☐ 8000LM | 8000 LM |
| ☐ 3000LM | 3000 LM 37"D Max Tunable White | ☐ 9000LM | 9000 LM |
| ☐ 4000LM | 4000 LM 37"D Max Standard Output, and EM Battery | ☐ 10000LM | 10000 LM |
| ☐ 5000LM | 5000 LM 45"D Max Standard Output, EM Battery, and Tunable White | ☐ 11000LM | 11000 LM 59"D Open Center Max Standard Output |
| ☐ 6000LM | 6000 LM | ☐ CU* | CUSTOM OUTPUT |

lm

8 DIMMING AND CONTROLS

- | | |
|-------------------------------|--|
| ☐ P01 | 0–10V 1% DIMMING |
| ☐ LEC* | HI-LUME 1% ECOSYSTEM LED DRIVER SOFT ON, FADE TO BLACK (LDE1 SERIES) |
| ☐ EBM | 0–10V 1% DIMMING INTEGRATED EM BATTERY OPTION
<i>Max Lumen output limited—consult LightArt.
Not available with Tunable White.</i> |
| ☐ DALI | DALI CONTROL |

9 CANOPY OPTIONS

- | | |
|-------------------------------|----------------|
| ☐ WPC | WHITE |
| ☐ BPC | BLACK |
| ☐ RWPC | RECESSED WHITE |
| ☐ RBPC | RECESSED BLACK |

10 POWER CORD

- | | |
|-----------------------------|-------|
| ☐ WH | WHITE |
| ☐ BK | BLACK |

11 CABLE CONNECTION

- | | |
|------------------------------|--|
| ☐ CCL | CABLES TO CEILING |
| ☐ CCN | CABLES TO CANOPY
<i>Only available on the 37D and 45D fixtures—Hang Height must exceed 12" minimum.</i> |

*Indicates modified choices; additional lead times, cost, and limited lumen outputs may apply.

 align Declare.



MADE IN USA
WITH GLOBAL AND
DOMESTIC PRODUCTS

LightArt

206.524.2223 LIGHTART.COM
4770 OHIO AVE S STE B, SEATTLE, WA 98134

ACOUSTIC DIAL OPEN
03/03/26 UPDATE 8/8