






Specifications


LIGHTING	Integrated LED light source offering high lumen output and efficacy. Color consistency of 3 SDCM. See additional information summarizing lumen distribution, wattage, and efficacy on following pages. Tunable white option available.	DRIVERS	120–277V constant current, dimming driver standard. Can be wired dimming or non-dimming. 0–10v dimming input with a range of 1%–100%. Dim-to-Off standard. Driver can be accessed from the fixture for higher lumen outputs. Driver accessible at canopy for lower lumen output. Power factor of > .95. Total Harmonic Distortion (THD) of < 20%.
LUMEN MAINTENANCE	Reported TM-21 Lifetimes L90(17k) = 52,600 hours L80(17k) > 102,000 hours L70(17k) > 102,000 hours	CERTIFICATION	Luminaire is CSA listed conforming to UL Standard 1598 in the U.S. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. Damp Location Rated. All electronic components are RoHS compliant, and the mechanical components of the luminaire have been verified to meet RoHS Directive 2002/95/EC.
CONSTRUCTION	1/16" 3form Varia. White Opal top and bottom diffuser. Contact your local sales rep for material samples.	CLEANING & CARE	Designed to withstand the demands of rigorous cleaning requirements. Effective cleaning and disinfection of environmental surfaces reduces microbe transmission. Superior chemical resistance and durability promotes safety in any design application. Use common disinfectants and cleaners to reduce microbe transmission.
ELECTRICAL	Emergency battery output: 6 watts for 90 minutes. Maximum Mounting height: 15ft. Compatible with Signify Bodine sinusoidal output emergency lighting inverters. Signify Bodine inverters allow designated lighting fixtures to serve as code compliant emergency lighting sources during failure of normal AC power. For additional information see link: http://www.bodine.com/products/inverter.html	WARRANTY	5 year warranty on all standard components.
MOUNTING	Adjustable stainless steel aircraft cable, contact studio for lengths over 20'. Available with multiple drop height J-hooks for group frame.	<div></div>	

Triangle Solid

Fixture Options

CLOUDFORM COLLECTION

DIMENSIONS

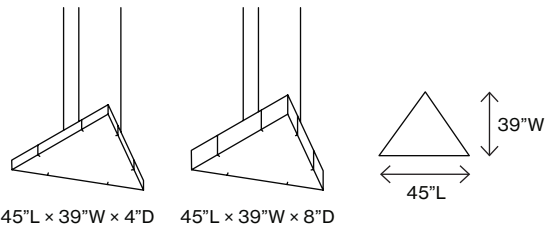

VARIA COLORS OPTIONS




Triangle Solid


CLOUDFORM COLLECTION

CEILING CONNECTIONS

CABLES TO CEILING

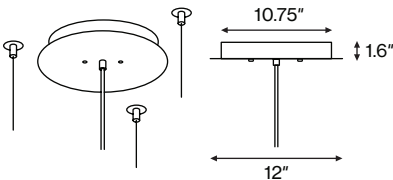


4" OCTAGONAL JUNCTION BOX (BY OTHERS)




CANOPY / DRESS PLATE FINISH OPTIONS



DECK MOUNT

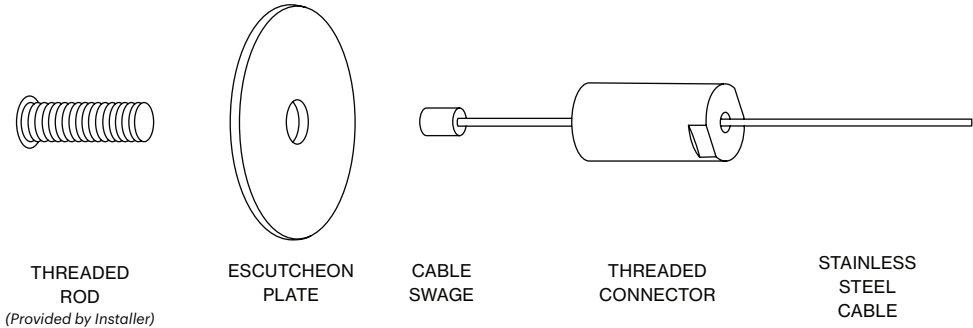


GRID MOUNT Contact LightArt for Grid Mount hook options

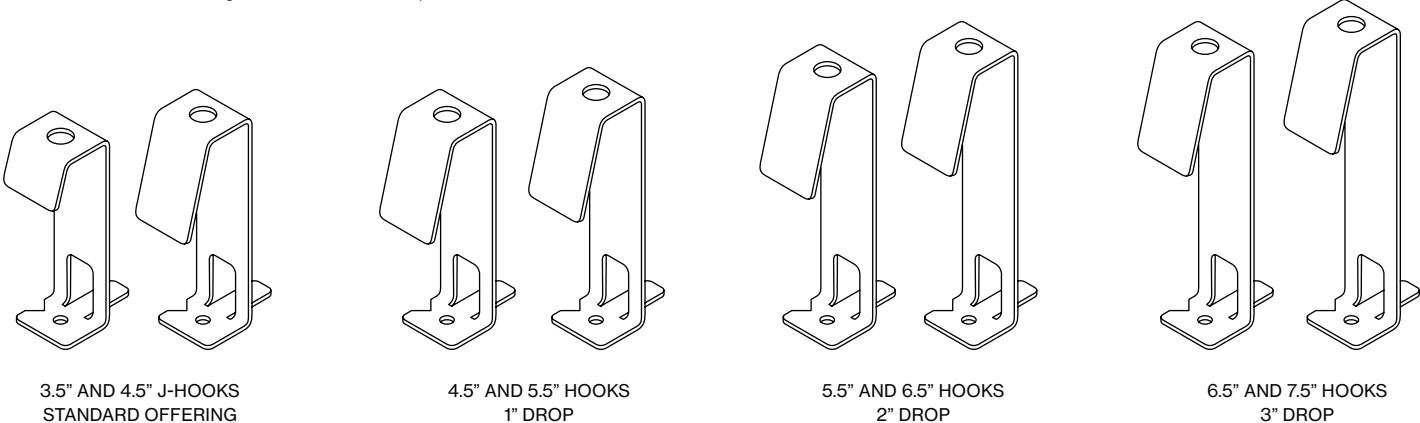

LIGHT DISTRIBUTION OPTIONS

Consult factory or lightart.com for IES files, tested in accordance with IESNA LM79

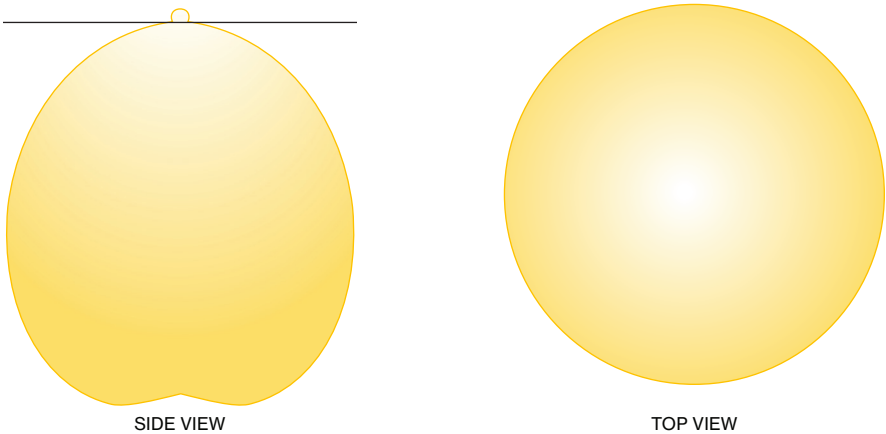

PERFORMANCE – TRIANGLE SOLID

Based on 3500K / 90CRI / Standard Distribution

NOMINAL LUMEN OUTPUT (LM)	INPUT POWER (W)	EFFICACY (LM/W)
1001	10	103
2002	19	103
3003	30	101
4004	40	101
5006	50	100
6007	61	99
7008	72	98
8009	83	97
9010	94	96
10011	105	95
11012	117	94
12013	129	93

LIGHT DISTRIBUTION

Based on measurement data

COLOR TEMPERATURE / CRI	MULTIPLIER
2700K / 80	0.98
2700K / 90	0.93
3000K / 80	1.02
3000K / 90	0.97
3500K / 80	1.00
3500K / 90	1.00
4000K / 80	1.08
4000K / 90	1.03

OUTPUT MULTIPLIERS INSTRUCTIONS

Adjusted Value = $L_1 \times C_m$ where:

L_1 = (Lumen output at 3500K / 90 CRI) ×

C_m = (Color Temp. / CRI Multiplier) ×

Example:

850LM / 3000K / 80CRI

$(850) \times (1.02) = 789\text{LM}$

Triangle Solid

Part Number Specification

CLOUDFORM COLLECTION

SPECIFICATION CODE

Example: 2 QTY CLF-LIGHT-STRI-4H-GIN-DM-STD-930CK-5000LM-P01-WPC-WH

QTY. CLF-LIGHT-STRI----------

1 2 3 4 5 6 7 8 9

Complete form to order Cloudform Triangle Solid fixture(s). For each number, make one selection and enter in the corresponding box above.

*Indicates modified choices; additional lead times and/or costs may apply.

1 HEIGHT

- ☐ 4H 4" HEIGHT
☐ 8H 8" HEIGHT

2 MATERIAL

- | | | | | | |
|------------------------------|------------------------------------|------------------------------|--------------------------------------|------------------------------|---|
| <input type="checkbox"/> CAU | <input type="checkbox"/> CHALDRON | <input type="checkbox"/> POM | <input type="checkbox"/> POMEGRANATE | <input type="checkbox"/> ESW | <input type="checkbox"/> BROWN SUGAR WALNUT |
| <input type="checkbox"/> MOO | <input type="checkbox"/> MOONSTONE | <input type="checkbox"/> RED | <input type="checkbox"/> REDWOOD | <input type="checkbox"/> TCH | <input type="checkbox"/> TOFFEE CHESTNUT |
| <input type="checkbox"/> JAR | <input type="checkbox"/> JARDIN | <input type="checkbox"/> GIN | <input type="checkbox"/> GINGER | <input type="checkbox"/> VAN | <input type="checkbox"/> VANILLA ASH |
| <input type="checkbox"/> CIT | <input type="checkbox"/> CITYSCAPE | <input type="checkbox"/> SQU | <input type="checkbox"/> SQUASH | <input type="checkbox"/> OAT | <input type="checkbox"/> HONEY OAT |
| <input type="checkbox"/> GYP | <input type="checkbox"/> GYPSUM | <input type="checkbox"/> ALM | <input type="checkbox"/> ALMOND | <input type="checkbox"/> DMW | <input type="checkbox"/> DARK MOCHA WALNUT |
| | | <input type="checkbox"/> VAP | <input type="checkbox"/> VAPOR | <input type="checkbox"/> EGT | <input type="checkbox"/> EARL GREY TEAK |
| | | | | <input type="checkbox"/> BRC | <input type="checkbox"/> BOURBON CHERRY |

3 MOUNTING

- ☐ DM DECK MOUNT
☐ GFM GROUP FRAME MOUNT

4 SUSPENSION

- ☐ STD 12" - 96"
☐ EXT 12" - 240"

5 LED CRI / CCT

- | | |
|---|---|
| <input type="checkbox"/> 827CK 80 CRI / 2700K | <input type="checkbox"/> 927CK 90 CRI / 2700K |
| <input type="checkbox"/> 830CK 80 CRI / 3000K | <input type="checkbox"/> 930CK 90 CRI / 3000K |
| <input type="checkbox"/> 835CK 80 CRI / 3500K | <input type="checkbox"/> 935CK 90 CRI / 3500K |
| <input type="checkbox"/> 840CK 80 CRI / 4000K | <input type="checkbox"/> 940CK 90 CRI / 4000K |
| | <input type="checkbox"/> TW TUNABLE WHITE |

CONTINUE TO NEXT PAGE TO COMPLETE SPECIFICATION



CONTINUE SPECIFICATION

6 OUTPUT

- ☐ 1000LM 1000 LM
- ☐ 2000LM 2000 LM
- ☐ 3000LM 3000 LM
- ☐ 4000LM 4000 LM
- ☐ 5000LM 5000 LM
- ☐ 6000LM 6000 LM
- ☐ 7000LM 7000 LM

- ☐ 8000LM 8000 LM *Max Tunable White and EM Battery Option*
- ☐ 9000LM 9000 LM
- ☐ 10000LM 10000 LM
- ☐ 11000LM 11000 LM
- ☐ 12000LM 12000 LM
- ☐ CU* CUSTOM OUTPUT

lm

7 DIMMING AND CONTROLS

- ☐ P01 0-10V 1% DIMMING
- ☐ LEC* HI-LUME 1% ECOSYSTEM LED DRIVER SOFT ON, FADE TO BLACK (LDE1 SERIES)
- ☐ EBM 0-10V 1% DIMMING INTEGRATED EM BATTERY OPTION
*Max Lumen output limited—consult LightArt.
Not available with Tunable White.*
- ☐ DALI DALI CONTROL

8 CANOPY OPTIONS

- ☐ WPC WHITE
- ☐ BPC BLACK

9 POWER CORD

- ☐ WH WHITE
- ☐ BK BLACK

*Indicates modified choices; additional lead times and/or costs may apply.

