

Static Links Unlit

Overview

ACOUSTIC COLLECTION



Specifications

SHADES	9mm thick Sola Felt is a PET material, manufactured with 50% post-consumer recycled content. Sola Felt is a LBC Red List Free labeled product, eligible for LEED, Living Building Challenge, and other green building certification credits.	WARRANTY	5 year warranty on all standard components.
CONSTRUCTION	Formed frame, finished in TGIC-free powder coat. Simple plug-together wiring and mechanical connectors at luminaire junctions.	CARE	The best way to remove airborne debris and dust from shades is to periodically vacuum. A Swiffer sheet or feathered duster can also be used for light dusting. To treat liquid stains, remove spills immediately with a clean damp cotton cloth or with detergent soap and warm water. Carpet and fabric cleaners can usually be used. Always test an inconspicuous area before applying cleaners to the actual stain.
END CAPS	White or black powder coated or wood end caps.		
MOUNTING	Adjustable stainless steel aircraft cable, contact studio for lengths over 20'.		




Static Links Unlit

Fixture Options


ACOUSTIC COLLECTION

DIMENSIONS

LEG LENGTHS *Dimensions shown are with Powder Coated Metal End Caps and Wood End Caps*

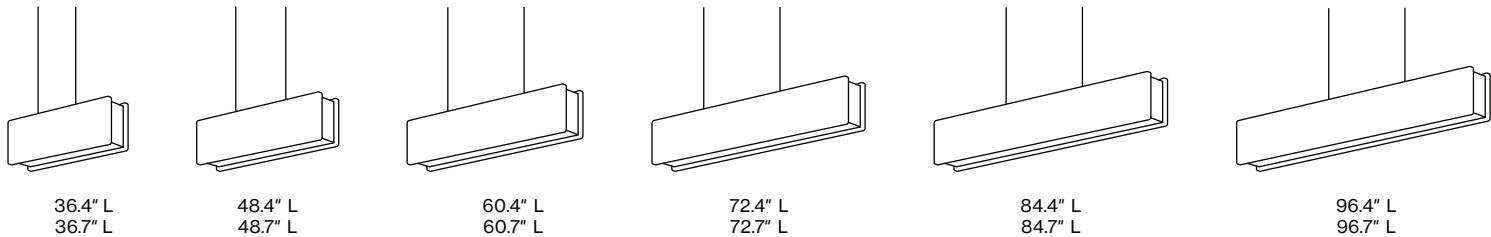


HEIGHTS & WIDTHS



ARRANGEMENT DIMENSIONS

ASSEMBLY ARRANGEMENT

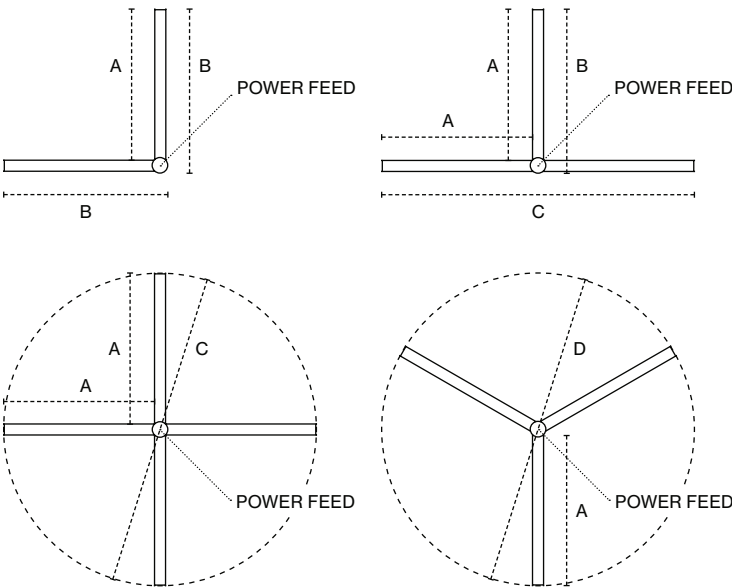

DIMENSIONS BASED ON LEG LENGTH

A	B	C	D
36.4"	40.3"	76.7"	75"
48.4"	52.3"	100.7"	99"
60.4"	64.3"	124.7"	123"
72.4"	76.3"	148.7"	147"
84.4"	88.3"	172.7"	171"
96.4"	100.3"	196.7"	195"

METAL END CAP

A	B	C	D
36.7"	40.6"	77.3"	75.6"
48.7"	52.6"	101.3"	99.6"
60.7"	64.6"	125.3"	123.6"
72.7"	76.6"	149.3"	147.6"
84.7"	88.6"	173.3"	171.6"
96.7"	100.6"	197.3"	195.6"

WOOD END CAP



SABINS PER FIXTURE Equivalent square feet of perfect absorption

CENTER FREQUENCY (HZ)	96-16 STATIC LINK X	48-12 STATIC LINK X	48-12 STATIC LINK Y	48-12 STATIC LINK T	48-12 STATIC LINK L
100	12.17	6.25	3.95	4.54	2.37
125	17.57	5.97	4.63	3.91	2.38
160	23.18	6.42	4.63	5.11	3.35
200	30.98	9.85	7.07	7.37	4.85
250	43.26	14.08	10.12	9.96	7.16
315	57.34	20.47	15.42	15.14	10.62
400	65.24	24.19	18.76	18.20	12.61
500	75.23	28.78	22.67	21.16	15.11
630	76.96	30.25	25.01	22.70	16.13
800	79.16	29.20	22.93	21.50	15.50
1000	79.17	28.75	22.81	21.44	15.28
1250	77.38	29.51	22.99	20.93	15.23
1600	75.90	28.93	22.87	21.32	15.11
2000	78.23	30.07	23.54	22.22	15.68
2500	83.58	31.90	25.85	23.55	16.70
3150	86.41	33.15	26.16	24.35	17.25
4000	85.22	33.46	26.25	24.45	17.41
5000	88.04	33.63	26.75	24.70	17.59
6300	87.16	33.88	26.78	24.36	17.52
8000	84.01	33.48	26.69	23.70	17.01
10000	86.01	33.41	27.09	24.09	16.63
AVERAGE OF 250, 500, 1000, 2000	68.97	25.42	19.79	18.69	13.31
EQUIVALENT SQ FT OF ACT (NRC 0.70)	98.53	36.31	28.27	26.71	19.01


The NRC of Static Links ranges from 0.75 to 1.00, depending on the size and configuration tested. Formal testing reports are available for more information.

Absorption

The Static line was tested in accredited laboratories to study the impact of fixture size and configuration on acoustic performance.

The acoustic testing of Static was conducted at NVLAP accredited laboratories and meets ISO 354 and ASTM C423. Formal test reports are available upon request.

- 96-16 ACOUSTIC STATIC LINK X
- 48-12 ACOUSTIC STATIC LINK X
- 48-12 ACOUSTIC STATIC LINK Y
- 48-12 ACOUSTIC STATIC LINK T
- 48-12 ACOUSTIC STATIC LINK L

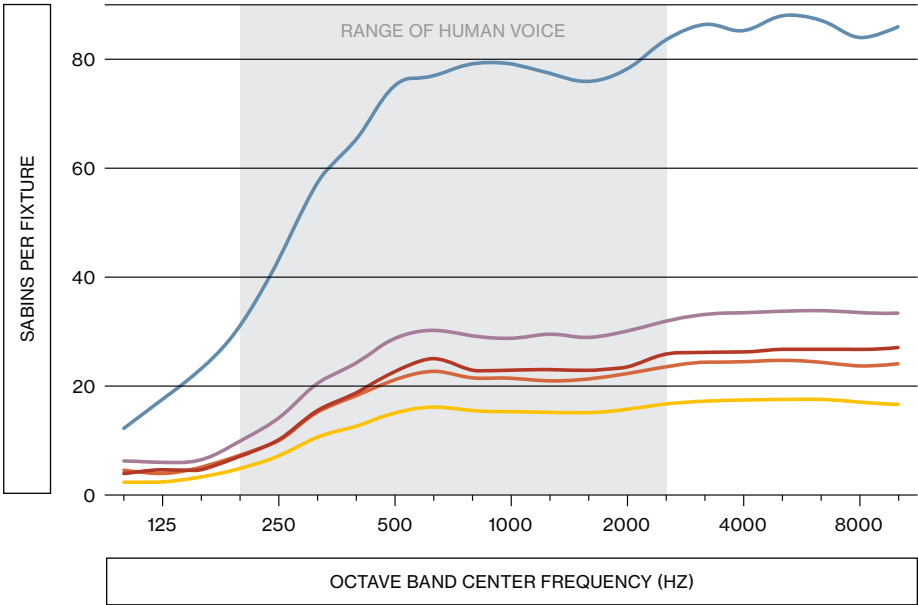

Static Links Unlit

Part Number Specification

ACOUSTIC COLLECTION

SPECIFICATION CODE Example: 2 QTY ACC-STAT-LINKU-L-12H-48H-CT-WPE-STD

QTY. ACC-STAT-LNKU - - - - - -

1 2 3 4 5 6

Complete form to order Static Links fixture(s). For each number, make one selection and enter in the corresponding box above.
*Indicates modified choices; additional lead times and/or costs may apply.

1 ARRANGEMENT

☐ L ☐ T ☐ X ☐ Y ☐ CG*	STATIC LINKS L STATIC LINKS T STATIC LINKS X STATIC LINKS Y CUSTOM GRID	STATIC LINKS PENDANT L T X Y	CUSTOM GRID EXAMPLES HEXAGON BOX CROSS
--	---	--	---

2 HEIGHT (Nominal)

☐ 6H	5.6" HEIGHT
☐ 12H	11.6" HEIGHT
☐ 16H	15.6" HEIGHT

3 LEG LENGTH (Nominal)

☐ 36L	36" LENGTH	☐ 72L	72" LENGTH
☐ 48L	48" LENGTH	☐ 84L	84" LENGTH
☐ 60L	60" LENGTH	☐ 96L	96" LENGTH

4 FELT COLOR

COLOR OPTIONS				PATTERN OPTIONS			
☐ EB ☐ NF ☐ CA ☐ SLT ☐ ML ☐ STL ☐ AR ☐ NI ☐ ZN	☐ EBONY ☐ NIGHTFALL ☐ CAST ☐ SILT ☐ MINERAL ☐ STEEL ☐ ARMOR ☐ NICKEL ☐ ZINC	☐ EM ☐ BU ☐ CI ☐ JP ☐ SF ☐ OCH ☐ MU ☐ AS ☐ CT	☐ EMERALD ☐ BURGUNDY ☐ CINNAMON ☐ JASPER ☐ SAFFRON ☐ OCHRE ☐ MUSTARD ☐ ARIES ☐ CITRINE	☐ LC ☐ AD ☐ DK ☐ STB ☐ PT ☐ DW ☐ DN ☐ VL	☐ LILAC ☐ ADMIRAL ☐ DUSK ☐ STEELBLUE ☐ PLATINUM ☐ DRIFTWOOD ☐ DUNE ☐ VANILLA	☐ DWA ☐ IOK ☐ WA ☐ BA	☐ WALNUT ☐ IRON OAK ☐ CARMEL OAK ☐ RICH BAMBOO

5 ENDCAP

☐ WPE ☐ BPE	 WHITE POWDER COAT BLACK POWDER COAT
☐ WOE* ☐ WAE*	 OAK WOOD ASH WOOD

6 SUSPENSION

☐ STD	24" - 96"
☐ EXT*	24" - 240"

*Indicates modified choices; additional lead times and/or costs may apply.

