



Specifications

SHADES	9mm thick Sola Felt is a PET material, manufactured with 50% post-consumer recycled content. Sola Felt is a LBC Red List Free labeled product, eligible for LEED, Living Building Challenge, and other green building certification credits.	WARRANTY	5 year warranty on all standard components.
CONSTRUCTION	Formed frame, finished in TGIC-free powder coat.	CARE	The best way to remove airborne debris and dust from shades is to periodically vacuum. A Swiffer sheet or feathered duster can also be used for light dusting. To treat liquid stains, remove spills immediately with a clean damp cotton cloth or with detergent soap and warm water. Carpet and fabric cleaners can usually be used. Always test an inconspicuous area before applying cleaners to the actual stain.
END CAPS	White or black powder coated, or wood end caps.		
MOUNTING	Adjustable stainless steel aircraft cable, contact studio for lengths over 20'.		


Static Baffle

Fixture Options


ACOUSTIC COLLECTION

LEG DIMENSIONS

AVAILABLE SIZES Dimensions shown are with Powder Coated Metal End Caps and Wood End Caps. Also available unlit. See Static Baffle spec sheet.

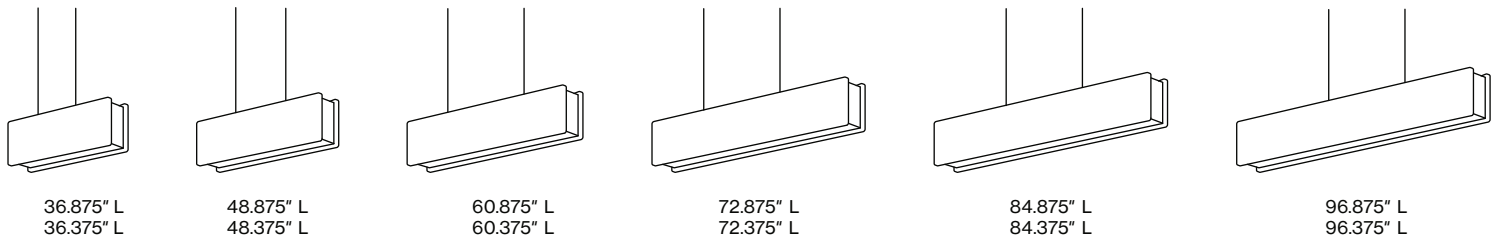

HEIGHTS & WIDTHS

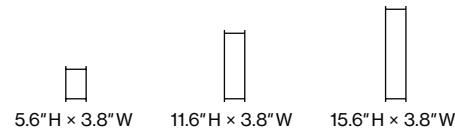

FELT COLOR & PATTERN OPTIONS

COLOR OPTIONS



PATTERN OPTIONS



END CAP CONFIGURATIONS

POWDER COATED



WOOD



SABINS PER FIXTURE Equivalent square feet of perfect absorption

CENTER FREQUENCY (HZ)	STATIC 48-16-4	STATIC 48-12-4	STATIC 48-6-4
100	1.27	0.60	-0.10
125	2.06	1.21	0.26
160	2.54	1.47	0.31
200	3.20	2.15	0.55
250	4.58	2.96	0.80
315	6.44	4.18	1.50
400	7.64	5.49	2.21
500	8.93	7.10	2.99
630	9.64	7.70	3.36
800	9.88	7.47	3.42
1000	10.22	7.62	3.69
1250	10.03	7.63	3.64
1600	9.96	7.70	3.79
2000	10.16	8.10	4.16
2500	10.92	8.59	4.68
3150	11.20	8.78	4.87
4000	11.04	8.74	4.91
5000	11.18	8.77	4.94
6300	10.94	8.81	4.88
8000	10.54	8.43	4.70
10000	10.20	8.29	4.72
AVERAGE OF 250, 500, 1000, 2000	8.47	6.44	2.91
EQUIVALENT SQ FT OF ACT (NRC 0.70)	12.10	9.21	4.16


The NRC of Static ranges from 0.75 to 1.00, depending on the size and configuration tested. Formal testing reports are available for more information.

Absorption

The Static line was tested in accredited laboratories to study the impact of fixture size and configuration on acoustic performance.

The acoustic testing of Static was conducted at NVLAP accredited laboratories and meets ISO 354 and ASTM C423. Formal test reports are available upon request.

- 48-16-4 ACOUSTIC STATIC
- 48-12-4 ACOUSTIC STATIC
- 48-6-4 ACOUSTIC STATIC

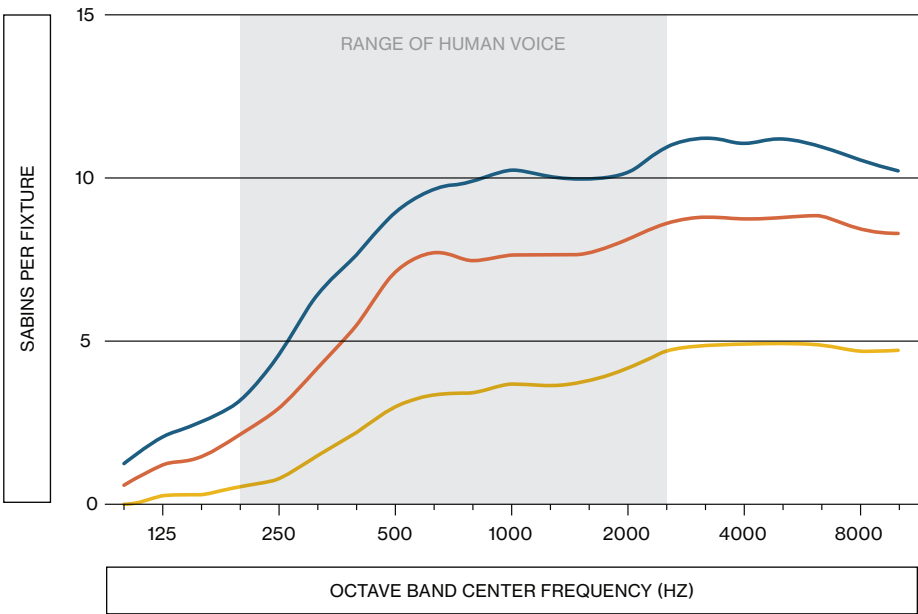

Static Baffle

Part Number Specification

ACOUSTIC COLLECTION

SPECIFICATION CODE

Example: 2 QTY ACC-STAT-BEAM-48L-12H-CT-WPE-CRW-CRLNA-STD

QTY.

ACC-STAT-ULBM-

1

2

3

4

5

6

7

Complete form to order Static fixture(s). For each number, make one selection and enter in the corresponding box above.
*Indicates modified choices; additional lead times and/or costs may apply.

1

LENGTH (Nominal)

36L

36" LENGTH

48L

48" LENGTH

60L

60" LENGTH

72L

72" LENGTH

84L

84" LENGTH

96L

96" LENGTH

CRL *

CUSTOM ROW LENGTH

Custom rows from 3' to 200' in 1' increments available

2

HEIGHT (Nominal)

6H

5.6" HEIGHT

12H

11.6" HEIGHT

16H

15.6" HEIGHT

3

FELT COLOR

COLOR OPTIONS

EB

EBONY

NF

NIGHTFALL

CA

CAST

SLT

SILT

ML

MINERAL

STL

STEEL

AR

ARMOR

NI

NICKEL

ZN

ZINC

EM

EMERALD

BU

BURGUNDY

CI

CINNAMON

JP

JASPER

SF

SAFFRON

OCH

OCHRE

MU

MUSTARD

AS

ARIES

CT

CITRINE

LC

LILAC

AD

ADMIRAL

DK

DUSK

STB

STEELBLUE

PT

PLATINUM

DW

DRIFTWOOD

DN

DUNE

VL

VANILLA

PATTERN OPTIONS

DWA

WALNUT

IOK

IRON OAK

WA

CARMEL OAK

BA

RICH BAMBOO

4

ENDCAP

WPE

WHITE POWDER COAT

BPE

BLACK POWDER COAT

WOE *

OAK WOOD

WAE *

ASH WOOD

5

MOUNTING

PM

INDIVIDUAL FIXTURE

CRW *

CONTINUOUS ROW FIXTURE

6

CONTINUOUS ROW LENGTH

CRLNA

NOT APPLICABLE

Individual lengths cannot be joined in the field

CUSRL *

CUSTOM ROW LENGTH

Specify custom length in 1' increments from 3' to 200'

ft

7

SUSPENSION

STD

24" – 96"

EXT *

24" – 240"

*Indicates modified choices; additional lead times and/or costs may apply.

