




Specifications


LIGHTING	Solid state LED system. 120v-277v input; 2700K-4000K in CRI >80 or 90; 8W	CERTIFICATION	CSA approved to UL standards Damp rated. ADA Compliant.
HARDWARE	TGIC-free powder coated backplate mounts to standard junction box (provided by others) Canopy and dress plate mounts to standard	WARRANTY	5 year warranty on all standard components. LED system rated for operation in ambient environments up to 25°C.
DIMMING	Dimming 0-10v	STANDARDS	6 week lead time 250+ 3form material options TGIC-free powder coat PVC-free power cord
		<div><div>align Declare.</div><div><div>Red List Free Ingredients</div><div>MADE IN USA WITH GLOBAL AND DOMESTIC PRODUCTS</div></div></div>	

Layered

Fixture Options

SCONCE

DIMENSIONS

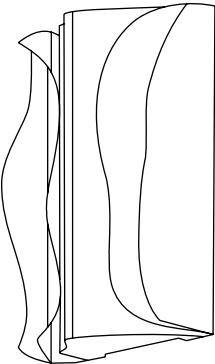

11"W x 14"H x 4"D

SHADE COLOR OPTIONS



LINEA IVORY
+ NOIR



LINEA IVORY
+ KHAKI



LINEA
IVORY




VEIL
PURE



TRANSLUCENT
SUEDE

Due to manufacturing and construction process used to create the Essentials and Connected collection, Pattern+ and wood grains will not match at fixture seams. Lead times subject to change.

CANOPY / DRESS PLATE FINISH OPTIONS



WHITE

Layered

Part Number Specification

SCONCE

SPECIFICATION CODE

Example: 2 QTY COL-LAYR-SCN-14H-LIK-830CK-WPB

COL-LAYR-SCN-

-

-

-

QTY.

1

2

3

4

Complete form to order Layered Sconce fixture(s). For each number, make one selection and enter in the corresponding box above.
*Indicates modified choices; additional lead times and/or costs may apply.

1

SIZE

14H

11"W X 14"H X 4"D

2

MATERIAL

LIN

LINEA IVORY + NOIR

LIK

LINEA IVORY + KHAKI

LI

LINEA IVORY

VP

VEIL PURETSCUST*

3

LED CRI/CCT

827CK

80 CRI / 2700K

830CK

80 CRI / 3000K

835CK

80 CRI / 3500K

840CK

80 CRI / 4000K

927CK

90 CRI / 2700K

930CK

90 CRI / 3000K

935CK

90 CRI / 3500K

4

BACKPLATE COLOR

WPB

WHITE