

Specifications



SHADE	1/32" thick 3form Varia resin. White Opal top and bottom diffuser.	DIMMING	Dimming 0-10v
LIGHTING	Solid state LED system 120v-277v input; 0-10v dimming compatible 3000k, 3500k or 4000k options 80 CRI light source 9.6w/linear ft. circuits	MOUNTING	Fully adjustable stainless steel aircraft cable. Contact LightArt for lengths over 20'.
LUMEN MAINTENANCE	Reported TM-21 Lifetimes L90(17k) = 52,600 hours L80(17k) > 102,000 hours L90(17k) > 102,000 hours	CERTIFICATION	CSA approved to UL standards Declare label certified Living Building Challenge compliant Damp rated
HARDWARE	10" Canopies and dress plates mount to standard junction box (provided by others). 3/64" stainless steel cables to ceiling. Adjustable suspension. Power cord to canopy	WARRANTY	5 year warranty on all standard components. LED system rated for operation in ambient environments up to 25°C.
		STANDARDS	6 week lead time 250+ 3form material options (contact LightArt for custom material pricing) TGIC-free powder coat PVC-free power cord

Rings


Fixture Options

LA2 COLLECTION

DIMENSIONS

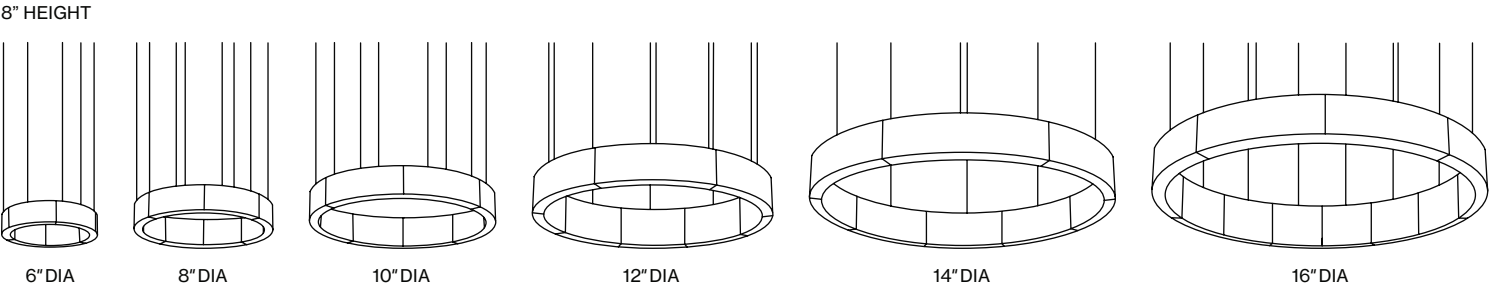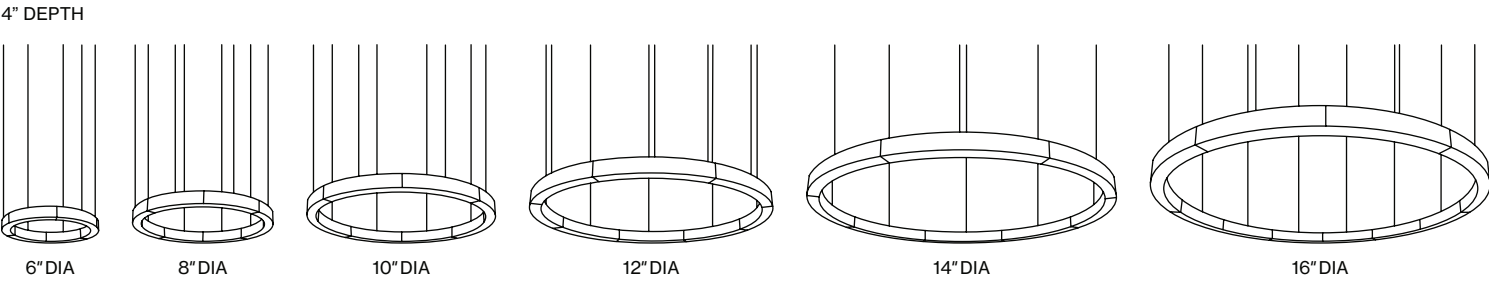


FIXTURE DEPTH All Fixtures have 6" Width




CEILING CONNECTIONS

OFFSET JUNCTION BOX For recessed canopy, cut 11" dia hole and recess j-box or mounting structure by 1.5"

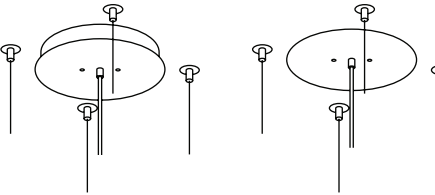

4" OCTAGONAL JUNCTION BOX (BY OTHERS)



CANOPY/DRESS PLATE FINISH OPTIONS



COLOR OPTIONS



Rings

Part Number Specification

LA2 COLLECTION

SPECIFICATION CODE

Example: 2 QTY LA2-CON-ELLI-10-WZ-830CK-STD-STD-WPC-WH

<input type="text"/>	LA2-CON-ELLI-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
QTY.		1		2		3		4		5		6		7

Complete form to order LA2 Connected Ellipses(s). For each number, make one selection and enter in the corresponding box above.

*Indicates modified choices; additional lead times and/or costs may apply.

1 SIZE

- | | |
|------------------------------|--------------|
| <input type="checkbox"/> 6D | 6' DIAMETER |
| <input type="checkbox"/> 8D | 8' DIAMETER |
| <input type="checkbox"/> 10D | 10' DIAMETER |
| <input type="checkbox"/> 12D | 12' DIAMETER |
| <input type="checkbox"/> 14D | 14' DIAMETER |
| <input type="checkbox"/> 16D | 16' DIAMETER |

2 HEIGHT

- | | |
|-----------------------------|-----------|
| <input type="checkbox"/> 4H | 4" HEIGHT |
| <input type="checkbox"/> 8H | 8" HEIGHT |

3 MATERIAL

- | | |
|--------------------------------|---------------|
| <input type="checkbox"/> GO | GOSSO |
| <input type="checkbox"/> NL | NATURAL |
| <input type="checkbox"/> CR | CINDER |
| <input type="checkbox"/> SO | SILKEN OYSTER |
| <input type="checkbox"/> CB2 | CRANBERRY x2 |
| <input type="checkbox"/> VC | VITAMIN C |
| <input type="checkbox"/> WZ | WIZARD |
| <input type="checkbox"/> CUST* | CUSTOM COLOR |

4 LED CRI/CCT

- | | |
|--------------------------------|----------------|
| <input type="checkbox"/> 830CK | 80 CRI / 3000K |
| <input type="checkbox"/> 835CK | 80 CRI / 3500K |
| <input type="checkbox"/> 840CK | 80 CRI / 4000K |

5 SUSPENSION

- | | |
|-------------------------------|------------|
| <input type="checkbox"/> STD | 12" - 96" |
| <input type="checkbox"/> EXT* | 24" - 240" |

6 CANOPY OPTION

- | | |
|-------------------------------|-----------|
| <input type="checkbox"/> STD | STANDARD |
| <input type="checkbox"/> REC* | RECESSED* |

6 CANOPY COLOR

- | | |
|------------------------------|-------|
| <input type="checkbox"/> WPC | WHITE |
| <input type="checkbox"/> BPC | BLACK |

7 POWER CORD

- | | |
|-----------------------------|-------|
| <input type="checkbox"/> WH | WHITE |
| <input type="checkbox"/> BK | BLACK |

align Declare.



MADE IN USA
WITH GLOBAL AND
DOMESTIC PRODUCTS