


ILLUSTRATIONS ARE REPRESENTATIVE OF A TYPICAL BEAM INSTALLATION. SIZE, SHAPE, & DETAILS OF YOUR FIXTURE WILL VARY BASED ON YOUR PROJECT. REFER TO SHOP DRAWINGS FOR SPECIFIC INFORMATION ABOUT YOUR FIXTURE.

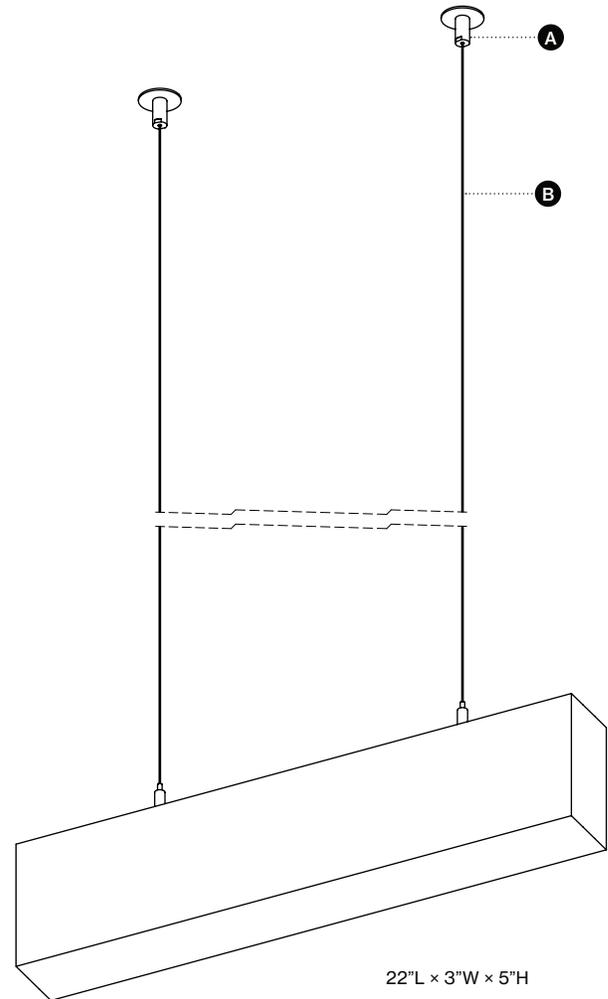


- A** CEILING CONNECTOR (x2)
- B** STAINLESS STEEL CABLE (x2)


Specifications

<p>SHIPPING / RECEIVING</p> <p>Fixtures boxed & shipped individually or for large quantities, on 4' x 4' or 4' x 8' pallets</p> <p>Customer responsible for receiving & unloading of fixtures</p> <p>Pallet jack / forklift strongly recommended (palletized orders only)</p> <p>Fixtures must be stored indoors in a climate controlled location prior to installation</p>	<p>SHIPPING / RECEIVING</p> <p>(2-3) People required for safe & efficient installation</p> <p>(2) Ladders or scissors lifts</p> <p>All necessary tools needed for proper wiring of fixture to supply circuits</p>	<p>HANDLING</p> <p>Fixtures should remain boxed for protection until needed for installation</p> <p>Fixtures are constructed of fiberglass, but must be handled with care</p> <p>Large fixture components should be handled by a minimum of 2 people</p> <p>Do not allow fixture components to rest on unpadding surfaces</p>	<p>CLEANING</p> <p>Dust and loose dirt may be easily removed by brushing or with a vacuum cleaner.</p> <p>Vacuum cleaner brush attachments such as those designed for cleaning upholstery or walls do the best job.</p> <p>Be certain to clean in one direction only. This will prevent rubbing dust in to the surface of the ceiling.</p> <p>Use a melanine eraser sponge to wipe off any dirt or greasy fingerprints.</p> <p>For minor surface and edge scuffing, or scratches on colored panels, use matching Sherwin-Williams® paint that can be purchased from your local Sherwin-Williams® store.</p>
--	--	--	--


22 INCH BEAM




34 INCH BEAM




46 INCH BEAM




58 INCH BEAM




70 INCH BEAM



82 INCH BEAM



94 INCH BEAM




Hang point adjustable for 34L to 94L Beams upto certain limit.

Parts Overview


Install 1/4-20 all thread, refer to project specific shop drawings provided by LightArt for exact locations.

Note: All-thread to be installed to support 60lb. minimum load


Note: All-thread should be installed to extend 1/2" below the line of the finish ceiling.

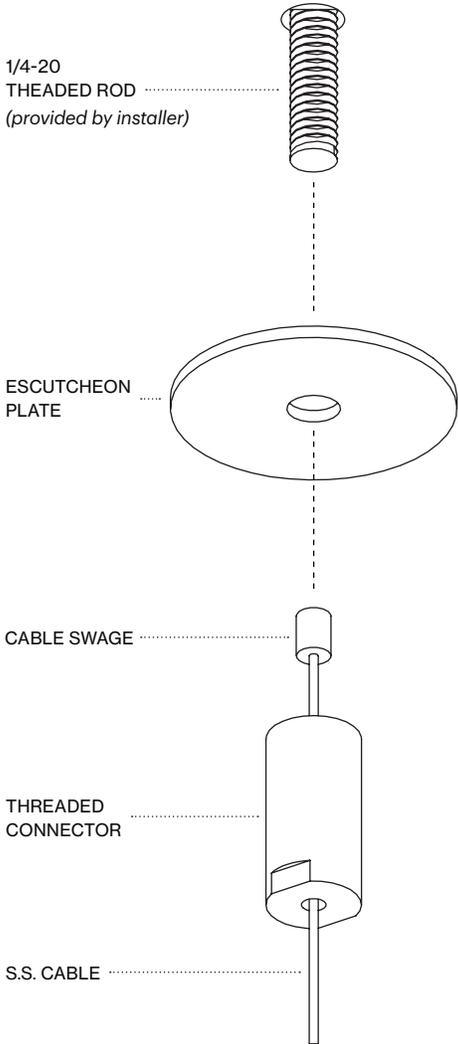


① Thread the adapter onto the all thread until firmly secured against ceiling as shown.

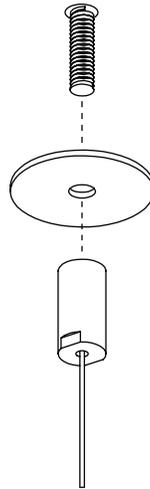

② Slide escutcheon plate over thread adapter & against the finished ceiling.

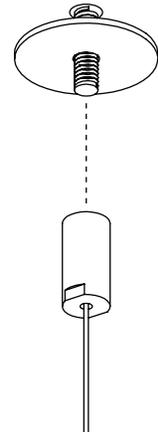

③ Thread ceiling coupler onto thread adapter as shown.



④ Continue threading ceiling coupler onto thread adapter until firmly secured against escutcheon plate at ceiling.

