




FIVE X

FACETED AND
LUMINOUS

LightArt®



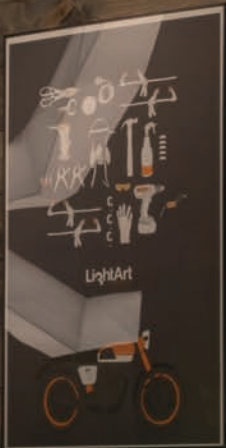

FIVE X

Advanced machining technology
and digital fabrication.



Named after 5-axis machining, the Five X collection utilizes a CNC machine that can move a tool on five different axes at the same time. Through advanced machining technology and digital fabrication, LightArt developed a line that combines geometry with a sculptural twist.



CIRCULAR 01 / Project: 55 W. Washington Lobby / Location: Chicago, IL / Dimensions: 83"L x 83"W x 24"H / Material: Gesso / Specifier: Shive-Hattery Architecture Interiors



RAY / Project: Navigant / Location: Chicago, IL / Dimensions: (2) 94"L x 20"W x 6"H / Material: Vapor + Pure White + Ghost / Specifier: IA Interior Architects

PIVOT CIRCULAR 02 / Project: Hensel Phelps / Location: Washington, DC / Dimensions: 99"L x 71"W x 16"H / Material: Cranberry x2 / Specifier: ZGF Zimmer Gunsul Frasca Architects




PIVOT ZIGZAG 01 / Project: AECOM / Location: Dallas, TX / Dimensions: 130"L x 22"W x 7"H / Material: Pure White / Specifier: Aecom
PIVOT LINEAR 03 / Project: Autodesk / Location: San Francisco, CA / Dimensions: 112"L x 8"W x 15"H / Material: Tiger Y15 + Hush Gesso + Ghost / Specifier: Revel Architecture & Design




PLOT

Table Lamp:
23"H x 7"Dia - 9w
Pendant:
12"H x 7"Dia - 9w




RAY

47"L x 20"W x 6"H - 68w
63"L x 20"W x 6"H - 92w
78"L x 20"W x 6"H - 116w
94"L x 20"W x 6"H - 140w

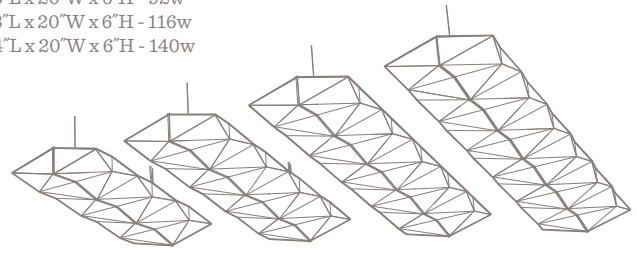


PIVOT LINEAR 01

96"L x 8"W x 7"H - 58w

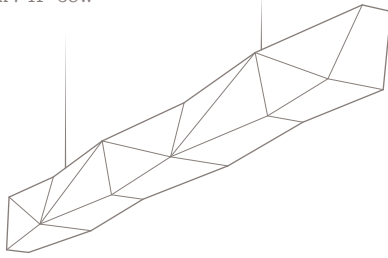


PIVOT LINEAR 03

112"L x 8"W x 15"H - 72w

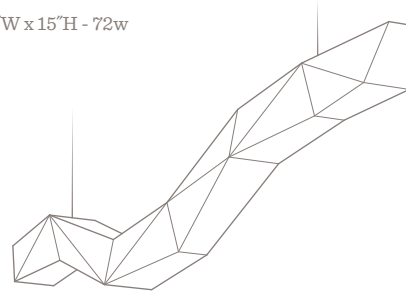



PIVOT ZIGZAG Z-01

130"L x 22"W x 7"H - 92w

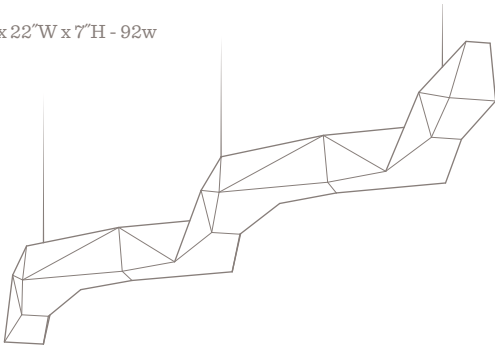


PIVOT CIRCULAR 01

83"L x 83"W x 24"H - 154w

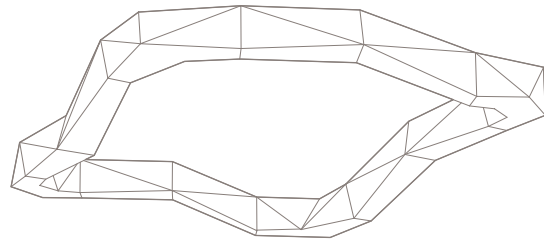



PIVOT CIRCULAR 02

99"L x 71"W x 16"H - 142w

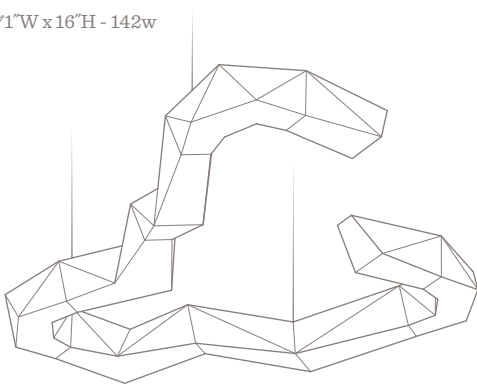

PIVOT CIRCULAR 03

83"L x 79"W x 24"H - 168w

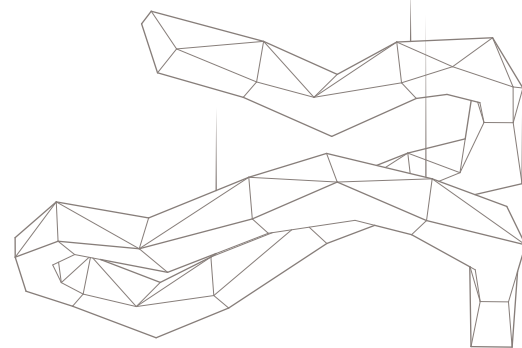

HARDWARE

Pivot: 1/16" stainless steel cables to ceiling
Ray: 3/64" stainless steel cables to ceiling

Rectangular canopy for Ray
White canopy and dress plate
mounts to round electrical box
96" power cord attached to fixture

LIGHTING

Solid state LED system (Ray + Pivot)
120-277v driver (Ray + Pivot)
Dimmable LED screw-in type E26 base
A19 lamp 9w, 3000w, 800 lumen, 120v
(Plot only)

Dimming 0-10v (Ray + Pivot)
3000K, 3500K, 4000K (selected fixtures)