

# Cylinder Shade Overview

ACOUSTIC COLLECTION



## Specifications

<b>SHADES</b>	9mm thick Sola Felt is a PET material, manufactured with 50% post-consumer recycled content. Sola Felt is a LBC Red List Free labeled product, eligible for LEED, Living Building Challenge, and other green building certification credits.	<b>HARDWARE</b>	TGIC-free powder coat. Stainless steel cable with nickel-plated cable gripper allows for adjustable hanging height. Made with RoHS compliant parts.								
<b>LIGHTING</b>	<p>LED module with single light emitting source, thermally managed to provide optimal performance. Specifiable in 2700K-4000K in CRI &gt;80 or CRI &gt;90, color accuracy within 3 SDCM. Also available in dim-to-warm.</p> <p>PoE or PoE+ compatible (depending on required output): Integrates with Power over Ethernet lighting systems through standard, low voltage wires. See wattage table on page 3 for PoE or PoE+ compatibility.</p> <p>E26 globe lamp models also available:          Sizes XS &amp; S: Source lumens 500, delivered lumens approx 415, 90 CRI, nominal lifetime 25,000 hours.          Sizes M, L &amp; XL: Source lumens 950, delivered lumens approx 788, 80 CRI, nominal lifetime 15,000 hours.</p>	<b>MOUNTING</b>	Canopy mounts to 4" octagonal junction box or appropriate alternative								
<b>DISTRIBUTION</b>	Beam spreads from 30 degree narrow flood to 78 degree wide flood available, achieved with optics that are easily changed in the field.	<b>ELECTRICAL</b>	Emergency battery output: 10 watts for 90 minutes. Maximum Mounting height: 14ft. Compatible with Signify Bodine sinusoidal output emergency lighting inverters. Signify Bodine inverters allow designated lighting fixtures to serve as code compliant emergency lighting sources during failure of normal AC power. For additional information see link: <a href="http://www.bodine.com/products/inverter.html">http://www.bodine.com/products/inverter.html</a>								
<b>LUMEN MAINTENANCE</b>	<table border="0"> <tr> <td>Reported:</td> <td>Calculated:</td> </tr> <tr> <td>L90: &gt;55,000 hours</td> <td>L70: &gt;180,000 hours</td> </tr> <tr> <td></td> <td>L80: &gt;120,000 hours</td> </tr> <tr> <td></td> <td><i>EPA TM21 calculator derived</i></td> </tr> </table>	Reported:	Calculated:	L90: >55,000 hours	L70: >180,000 hours		L80: >120,000 hours		<i>EPA TM21 calculator derived</i>	<b>CERTIFICATION</b>	CSA certified to CSA C22.2 No. 250.0, and conforms to UL standard 1598. PoE Compatible fixtures meet UL 2108.
Reported:	Calculated:										
L90: >55,000 hours	L70: >180,000 hours										
	L80: >120,000 hours										
	<i>EPA TM21 calculator derived</i>										
<b>PHOTOMETRICS</b>	Consult factory or website for IES files, tested in accordance with IESNA LM79	<b>CARE</b>	The best way to remove airborne debris and dust from shades is to periodically vacuum. A Swiffer sheet or feathered duster can also be used for light dusting. To treat liquid stains, remove spills immediately with a clean damp cotton cloth or with detergent soap and warm water. Carpet and fabric cleaners can usually be used. Always test an inconspicuous area before applying cleaners to the actual stain.								
		<b>WARRANTY</b>	5 year warranty on all standard components.								




# Cylinder Shade

## Fixture Options

ACOUSTIC COLLECTION

### DIMENSIONS

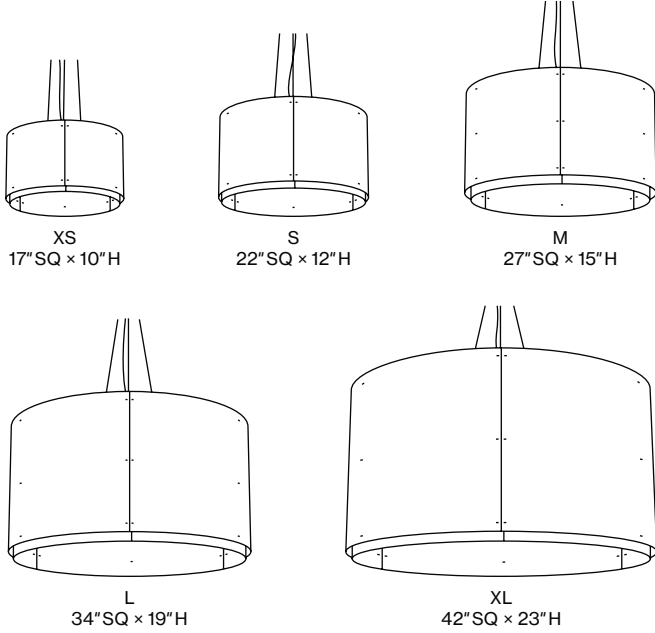

### FELT COLOR OPTIONS



**Declare.**

Sola Felt, Clario, Hush Clad, and Tetria Acoustic Solutions 3form

Final Assembly: Salt Lake City, Utah, USA  
 Life Expectancy: 20 Years  
 End of Life Options: Salvageable/Recyclable in its Entirety, Take Back Program (Optional, Salt Lake City, Utah)  
 EU CoC Screened: Does Not Contain

Ingredients:

polyethylene terephthalate 3-  
 hydroxyphenylphosphorylpropionic acid, Titanium dioxide,  
 Carbon black, Spinning Finish

Living Building Challenge Criteria: Compliant

1-13 Red List  
 ■ LBC Red List Free    % Declared: 100% at 100ppm  
 ■ LBC Red List Approved    VOC Content: Not Applicable  
 ☐ Declared


1-40 Material Performance: C294 Standard Method v13-2010  
 1-14 Responsible Sourcing: Not Applicable

TFM-0003  
 EXPI: 01 OCT 2022  
 SCREENED: 21 SEP 2021  
 Original Issue Date: 2019


INTERNATIONAL LIVING FUTURE INSTITUTE® [livingfuture.org/declare](http://livingfuture.org/declare)

### CEILING CONNECTION


#### STANDARD CANOPY

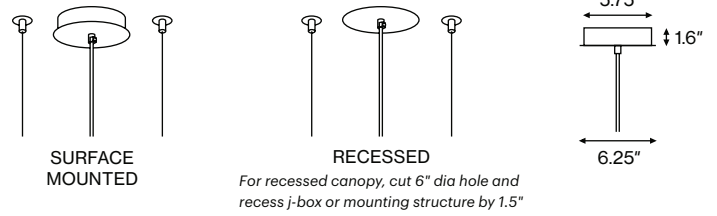


#### ULTRA SHALLOW CANOPY (E26 ONLY)

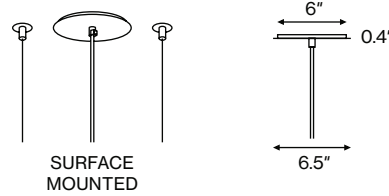

#### EM BATTERY OPTION ONLY

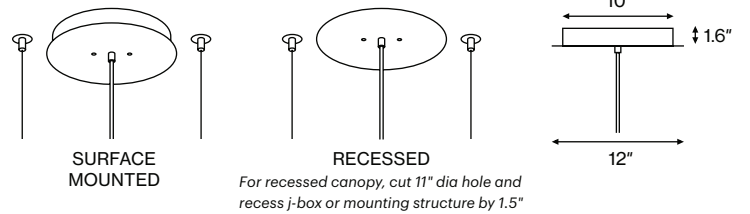

#### 4" OCTAGONAL JUNCTION BOX\* (BY OTHERS)

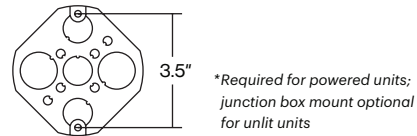

#### CANOPY / DRESS PLATE FINISH OPTIONS



# Cylinder Shade

## Acoustic Details

ACOUSTIC COLLECTION

**SABINS PER FIXTURE** Equivalent square feet of perfect absorption

CENTER FREQUENCY (HZ)	27 DIA 14 H CYLINDER (M)	34 DIA 19 H CYLINDER (L)
100	2.44	5.04
125	1.97	4.93
160	3.50	6.15
200	4.16	6.93
250	4.84	6.71
315	4.98	7.53
400	4.74	8.19
500	5.95	9.23
630	6.29	10.12
800	6.94	11.24
1000	7.69	12.00
1250	8.66	13.20
1600	9.36	14.73
2000	10.35	16.19
2500	11.26	17.38
3150	11.69	18.14
4000	12.35	18.84
5000	12.07	19.11
AVERAGE OF 250, 500, 1000, 2000	7.10	11.12
EQUIVALENT SQ FT OF ACT (NRC 0.90)	7.90	12.40
EQUIVALENT SQ FT OF ACT (NRC 0.70)	10.10	15.90

## Absorption


NRC per Fixture: 0.90

Average of values taken at 250, 500, 1000, and 2000 Hz

The NRC of felt depends on its configuration. LightArt fixtures utilize deep airspaces and multiple layers to keep NRC ratings high for all exposed felt surfaces.

The acoustic testing of Acoustic Shade was conducted at NVLAP accredited laboratories and meets ISO 354 and ASTM C423. Formal test reports are available upon request.

— 34 DIA 19 H CYLINDER (L)  
 — 27 DIA 14 H CYLINDER (M)

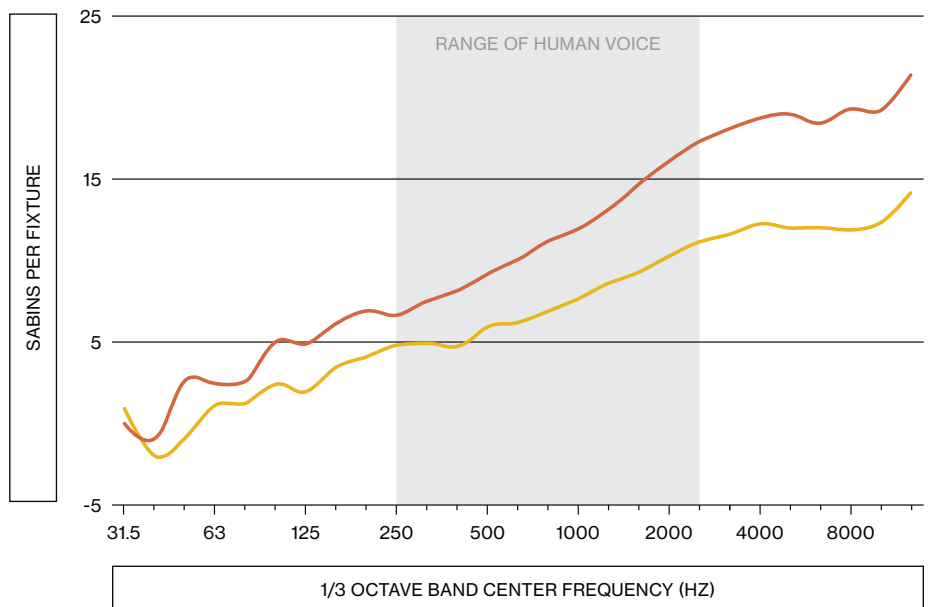


# Cylinder Shade

## Lighting Details


ACOUSTIC COLLECTION

### LIGHT DISTRIBUTION OPTIONS

Consult factory or lightart.com for IES files, tested in accordance with IESNA LM79

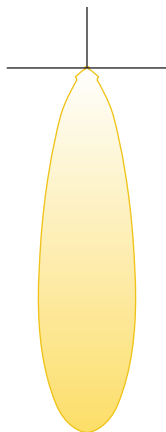

30° NARROW FLOOD  
LUMINOUS FLUX: 2678LM  
INPUT POWER: 25W  
SPACING CRITERION: 0.50  
Testing performed with  
3500K / 80CRI configuration

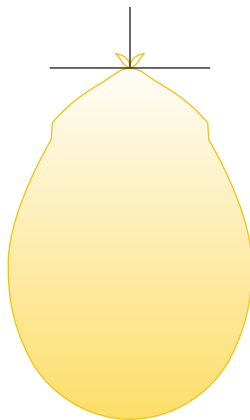

78° WIDE FLOOD  
LUMINOUS FLUX: 2373LM  
INPUT POWER: 25W  
SPACING CRITERION: 1.08  
Testing performed with  
3500K / 80CRI configuration

### PERFORMANCE

Based on 3500K / 80CRI / NFL / M Size configuration (HP light core) and 300 for E26 lamp

NOMINAL LUMEN OUTPUT	DELIVERED LUMENS	INPUT POWER (W)	EFFICACY (LM/W)	POE COMPATIBILITY	OUTPUT / LED DRAW WATTAGE (FOR USE W/ POE)
415 (E26 XS, S)	415	7.0	59	N/A	N/A
780 (E26 M, L, XL)	788	12.0	66	N/A	N/A
700	718	7.3	99	POE & POE+	7.3
800	839	8.8	95	POE & POE+	8.8
900	959	9.4	91	POE & POE+	11.5
1000	1003	8.4	119	POE & POE+	7.2
1600	1650	14.6	113	POE & POE+	12.4
2100	2159	19.6	110	POE+ ONLY	16.7
2600	2678	25.0	107	POE+ ONLY	21.4

### OPTICAL CHARACTERISTICS

Based on measurement data

	BEAM ANGLE	SPACING CRITERION
NARROW FLOOD	30°	0.50
FLOOD	54°	0.79
WIDE FLOOD	78°	1.08

### OUTPUT MULTIPLIERS

Based on measurement data

COLOR TEMPERATURE / CRI	MULTIPLIER
2700K / 80	0.93
2700K / 90	0.78
3000K / 80	0.97
3000K / 90	0.81
3500K / 80	1.00
3500K / 90	0.83
4000K / 80	1.01
4000K / 90	0.86
WARM DIM 1830 / 90	0.72

OPTIC	MULTIPLIER
30°	1.00
54°	0.94
78°	0.89

### OUTPUT MULTIPLIERS INSTRUCTIONS

Adjusted Value =  $L_1 \times C_m \times O_m$  where:

$L_1$  = (Lumen output at 3500K / 80 CRI) ×

$C_m$  = (Color Temp. / CRI Multiplier) ×

$O_m$  = (Optic Multiplier)

Example:

850LM / 3000K / 80CRI / FL Configuration

$(850) \times (0.97) \times (0.92) = 2206LM$

# Cylinder Shade

## Part Number Specification

ACOUSTIC COLLECTION

**SPECIFICATION CODE**

Example: 2 QTY ACC-SHPE-CYLN-22SQ-CT-ZN2-STD-BPC-BK-BPF-835CK-800LM-FL-LT02

QTY. ACC-SHPE-CYLN-
  <sup>1</sup> -
  <sup>2</sup> -
  <sup>3</sup> -
  <sup>4</sup> -
  <sup>5</sup> -
  <sup>6</sup> -
  <sup>7</sup> -
  <sup>8</sup> -
  <sup>9</sup> -
  <sup>10</sup> -
  <sup>11</sup>

Complete form to order Cylinder Shade fixture(s). For each number, make one selection and enter in the corresponding box above.

\*Indicates modified choices; additional lead times and/or costs may apply.

**1 SIZE** *Nominal*

- 17D 17" DIAMETER
- 22D 22" DIAMETER
- 27D 27" DIAMETER
- 34D 34" DIAMETER
- 42D 42" DIAMETER

**2 OUTER FELT COLOR**

- |                                       |  |                                     |
|---------------------------------------|--|-------------------------------------|
| <input type="checkbox"/> EB EBONY     | <input type="checkbox"/> EM EMERALD    | <input type="checkbox"/> SF SAFFRON |
| <input type="checkbox"/> NF NIGHTFALL | <input type="checkbox"/> AD ADMIRAL    | <input type="checkbox"/> JP JASPER  |
| <input type="checkbox"/> CA CAST      | <input type="checkbox"/> DK DUSK       | <input type="checkbox"/> AS ARIES   |
| <input type="checkbox"/> ML MINERAL   | <input type="checkbox"/> STB STEELBLUE | <input type="checkbox"/> OCH OCHRE  |
| <input type="checkbox"/> STL STEEL    | <input type="checkbox"/> PT PLATINUM   | <input type="checkbox"/> MU MUSTARD |
| <input type="checkbox"/> AR ARMOR     | <input type="checkbox"/> SLT SILT      | <input type="checkbox"/> CT CITRINE |
| <input type="checkbox"/> NI NICKEL    | <input type="checkbox"/> DW DRIFTWOOD  |                                     |
| <input type="checkbox"/> ZN ZINC      | <input type="checkbox"/> DN DUNE       |                                     |

**3 INNER FELT COLOR**

- |  |   |                                      |
|--|---|--------------------------------------|
| <input type="checkbox"/> EB2 EBONY     | <input type="checkbox"/> EM2 EMERALD    | <input type="checkbox"/> SF2 SAFFRON |
| <input type="checkbox"/> NF2 NIGHTFALL | <input type="checkbox"/> AD2 ADMIRAL    | <input type="checkbox"/> JP2 JASPER  |
| <input type="checkbox"/> CA2 CAST      | <input type="checkbox"/> DK2 DUSK       | <input type="checkbox"/> AS2 ARIES   |
| <input type="checkbox"/> ML2 MINERAL   | <input type="checkbox"/> STB2 STEELBLUE | <input type="checkbox"/> OCH2 OCHRE  |
| <input type="checkbox"/> STL2 STEEL    | <input type="checkbox"/> PT2 PLATINUM   | <input type="checkbox"/> MU2 MUSTARD |
| <input type="checkbox"/> AR2 ARMOR     | <input type="checkbox"/> SLT2 SILT      | <input type="checkbox"/> CT2 CITRINE |
| <input type="checkbox"/> NI2 NICKEL    | <input type="checkbox"/> DW2 DRIFTWOOD  |                                      |
| <input type="checkbox"/> ZN2 ZINC      | <input type="checkbox"/> DN2 DUNE       |                                      |

**4 SUSPENSION**

- STD 12" - 96"
- EXT\* 24" - 240"

**5 CANOPY OPTIONS**

- WPC WHITE
- BPC BLACK
- RWPC RECESSED WHITE
- RBPC RECESSED BLACK

**6 POWER CORD**

- WH WHITE
- BK BLACK

*Cord finish will match canopy, unless otherwise specified*

**7 FRAME COLOR**

- WPF WHITE
- BPF BLACK

**8 LED CRI/CCT**

- |   |  |
|---|--|
| <input type="checkbox"/> 827CK 80 CRI / 2700K | <input type="checkbox"/> 930CK 90 CRI / 3000K                                      |
| <input type="checkbox"/> 830CK 80 CRI / 3000K | <input type="checkbox"/> 935CK 90 CRI / 3500K                                      |
| <input type="checkbox"/> 835CK 80 CRI / 3500K | <input type="checkbox"/> 1830W WARM DIMMING 90 CRI<br>3000K to 1800K Dimming Range |
| <input type="checkbox"/> 840CK 80 CRI / 4000K | <input type="checkbox"/> E26GL E26 BASE GLOBAL LAMP                                |
| <input type="checkbox"/> 927CK 90 CRI / 2700K |  |

CONTINUE TO NEXT PAGE TO COMPLETE SPECIFICATION



# Cylinder Shade

## Part Number Specification

ACOUSTIC COLLECTION

CONTINUE SPECIFICATION

### 9 NOMINAL DELIVERED LUMENS

ONLY AVAILABLE IN SIZES XS, S  
Warm Dim only available in 700LM

- 700LM 700 LUMEN
- 800LM 800 LUMEN
- 900LM 900 LUMEN

ONLY AVAILABLE IN SIZES M, L, XL  
Warm Dim only available in 1600LM

- 1000LM 1000 LUMEN
- 1600LM 1600 LUMEN
- 2100LM 2100 LUMEN
- 2600LM 2600 LUMEN

AVAILABLE IN ALL SIZES

XS, S: 415LM delivered 3000K >90 CRI, 120V only  
M, L, XL: 788LM delivered 3000K >80 CRI, 120V only

- E26LM E26 BASE GLOBAL LAMP LUMENS

### 10 BEAM SPREAD *Beam spread kits available—contact LightArt for more information*

- NFL NARROW FLOOD OPTION (21°)
- FL FLOOD OPTION (39°)
- WFL WIDE FLOOD OPTION (69°)

- E26S E26 BASE A LAMP

### 11 DIMMING AND CONTROLS

- LV01 0-10V – 1% DIMMING 120 & 277V
- LT02 LEADING/TRAILING/TRIAC – 5% DIMMING 120v only
- LP01 ELV FORWARD/REVERSE PHASE – 1% DIMMING 120v only
- LVP LOW VOLTAGE POE *No driver provided for POE. Power supply by others. Not available with E26 Base A lamp.*
- EBM 0-10V 1% DIMMING INTEGRATED EM BATTERY OPTION  
*Max Lumen output limited—consult LightArt. Not available for E26. Universal Input (Dim on 120V for TRIAC/ELV & 120/277V for 0-10V)*
- E26 E26 BASE A LAMP *Only compatible with 120V ELV Dimming*

\*Indicates modified choices; additional lead times and/or costs may apply.

