



Specifications


CONSTRUCTION	1/16" 3from Varia. White Opa top and bottom diffuser Contact your local sales rep for material samples.
LIGHTING	Solid state LED system. 120v-277v input; 2700K-4000K in CRI >80 or CRI >90. Dimming 0-10v 69W fixture wattage
PHOTOMETRICS	Consult factory or website for IES files, tested in accordance with IESNA LM79
HARDWARE	TGIC-free powder coated canopy. Canopy and dress plate mounts to standard junction box (junction box provided by others). Sureface mount option available Stainless steel cable with nickel-plated cable gripper allows for adjustable hanging height. Made with RoHS compliant parts.
MOUNTING	Fully adjustable stainless steel aircraft cable.
CERTIFICATION	CSA approved to UL standards. Declare certification.
WARRANTY	5 year warranty on all standard components. LED system rated for operation in ambient temperatures up to 25°C.  Suitable for Dry or Damp locations. Indoor use only.
LEAD TIME	6 week lead time

CLEANING & CARE	Designed to with the demands of rigorous cleaning requirements. Effective cleaning and disinfection of enviromental surfaces reduces microbe transmission. Superior chemical resistance and durability promotes safety in any design application. Use common disinfectants and cleaners to reduce microbe transmission.
-----------------	---




DIMENSIONS


HEIGHT, WIDTH, LENGTH



4"H  
54"L X 46"W



8"H  
54"L X 46"W



12"H  
54"L X 46"W


FELT COLOR OPTIONS



GEDSO



NATURAL



CINDER



SILKEN  
OYSTER



VITAMIN C



WIZARD



MIDCENTURY  
ROSEWOOD




CRANBERRY X2

CANOPY / DRESS PLATE FINISH OPTIONS




BLACK



WHITE

CEILING CONNECTION

CABLES TO CEILING

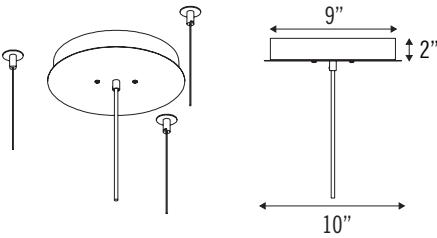

Declare.

LightArt LA2 Lighting Fixtures with PVC-Free Cable 3form

Final Assembly: Salt Lake City, Utah, USA

Life Expectancy: 5 Year(s)

End of Life Options: Salvageable/Reusable in its Entirety

EU CoC Screened: Does Not Contain

Ingredients:

Polymethyl Methacrylate; Polyethylene Terephthalate Glycol; Aluminum Steel Electrical Components; Copper; Polyethylene Terephthalate; 2-ethyl-N,N-bis(2-ethylhexyl)phenylamine; 2-Propenoic acid, 2-cyano-ethyl ester; Alumina trihydrate; Barium Sulphate; Boron; Iron; Mica; Neodymium; Nickel; Nylon; Polyethylene; Polyurethane; Tin; Tissue Separator (Cellulose); Titanium dioxide. Undisclosed (< 0.01%)<sup>2</sup>

ULBC Temp Exception RL-002 - Small Electrical Components

ULBC Temp Exception RL-004b - Proprietary Ingredients in Declare

Living Building Challenge Criteria: Compliant

ULBC Red List

ULBC Red List Free

ULBC Red List Approved

Declassified

% Disclosed: 99.93% at 100ppm

VOC Content: Not Applicable

ULBC Interior Performance: Not Applicable

ULBC Responsible Sourcing: Low Risk Wood

align

Declare.

Red List Free Ingredients

MADE IN USA

LightArt

206.524.2223 LIGHTART.COM  
4770 OHIO AVE S STE B, SEATTLE, WA 98134

DELTA  
08/18/23 UPDATE 2/3

## SPECIFICATION CODE

Example: 2 QTY LA2-ESS-DELT-4H-WZ-830CK-STD-BPC-BK

<input type="text"/>	LA2-ESS-DELT	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
QTY.			1		2		3		4		5		6


Complete form to order Cube Shade fixture(s). For each number, make one selection and enter in the corresponding box above.

\*Indicates modified choices; additional lead times and/or costs may apply.

1 SIZE *Nominal*

- |                              |            |
|------------------------------|------------|
| <input type="checkbox"/> 4H  | 4" HEIGHT  |
| <input type="checkbox"/> 8H  | 8" HEIGHT  |
| <input type="checkbox"/> 12H | 12" HEIGHT |

## 2 MATERIAL

- |                              |  |                               |  |
|------------------------------|--|-------------------------------|--|
| <input type="checkbox"/> GO  | <input type="checkbox"/> GESSO               | <input type="checkbox"/> CUST |  CUSTOM COLOR |
| <input type="checkbox"/> NL  | <input type="checkbox"/> NATURAL             |                               |  |
| <input type="checkbox"/> CR  | <input type="checkbox"/> CINDER              |                               |  |
| <input type="checkbox"/> SO  | <input type="checkbox"/> SILKEN OYSTER       |                               |  |
| <input type="checkbox"/> CB2 | <input type="checkbox"/> CRANBERRY X2        |                               |  |
| <input type="checkbox"/> VC  | <input type="checkbox"/> VITAMIN C           |                               |  |
| <input type="checkbox"/> WZ  | <input type="checkbox"/> WIZARD              |                               |  |
| <input type="checkbox"/> MCR | <input type="checkbox"/> MIDCENTURY ROSEWOOD |                               |  |

## 3 LED CRI/CCT

- |                                |                |                                |                |
|--------------------------------|----------------|--------------------------------|----------------|
| <input type="checkbox"/> 827CK | 80 CRI / 2700K | <input type="checkbox"/> 930CK | 90 CRI / 3000K |
| <input type="checkbox"/> 830CK | 80 CRI / 3000K | <input type="checkbox"/> 935CK | 90 CRI / 3500K |
| <input type="checkbox"/> 835CK | 80 CRI / 3500K |                                |                |
| <input type="checkbox"/> 840CK | 80 CRI / 4000K |                                |                |
| <input type="checkbox"/> 927CK | 90 CRI / 2700K |                                |                |

Cord finish will match canopy, unless otherwise specified

## 4 SUSPENSION

- |                               |            |
|-------------------------------|------------|
| <input type="checkbox"/> STD  | 12" - 96"  |
| <input type="checkbox"/> EXT* | 12" - 240" |

## 5 CANOPY COLOR

- |                              |       |
|------------------------------|-------|
| <input type="checkbox"/> WPC | WHITE |
| <input type="checkbox"/> BPC | BLACK |

## 6 POWER CORD

- |                             |       |
|-----------------------------|-------|
| <input type="checkbox"/> WH | WHITE |
| <input type="checkbox"/> BK | BLACK |