

Specifications

1/32" thick 3form Varia resin. SHADE White Opal top and bottom diffuser.

LIGHTING Solid state LED system

120v-277v input 2700K - 4000K

80/90 CRI light source 25w / 1301 lumens Small Medium 40w/2722 lumens 50w / 4174 lumens Large X-Large 71w / 5626 lumens

HARDWARE Removable TGIC-free powder coated metal lid.

Canopy and dress plate mounts to standard junction box (junction box provided by others).

3/64" stainless steel cables to ceiling.

Power cord to canopy

DIMMING Dimming 0-10v MOUNTING Fully adjustable stainless steel aircraft cable. Contact LightArt for lengths over 20'.

CSA approved to UL standards CERTIFICATION

Declare label certified

Living Building Challenge compliant

Damp rated

WARRANTY 5 year warranty on all standard components.

LED system rated for operation in ambient

environments up to 25°C.

STANDARDS 6 week lead time

250+ 3 form material options

(contact LightArt for custom material pricing)

TGIC-free powder coat PVC-free power cord









Fixture Options

WIZARD

LA2 SLIM


SHAPES & DIMENSIONS SHADE COLOR OPTIONS






21.5"Dia. x 2.5"D x 2.5"H - 2.5lbs

33"Dia. x 2.5"D x 2.5"H - 4.5lbs



43"Dia. x 2.5"D x 2.5"H - 6lbs

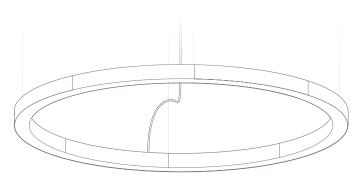

57.5"Dia. x 2.5"D x 2.5"H - 8lbs

CINDER SILKEN GESSO NATURAL OYSTER

CRANBERRY×2


3form Varia

Due to manufacturing and construction process used to create the Essentials and Connected collection, Pattern+ and wood grains will not match at fixture seams. Lead times subject to change.

VITAMIN C

CEILING CONNECTIONS

OFFSET JUNCTION BOX



For recessed canopy, cut 11" dia hole and

4" OCTAGONAL JUNCTION BOX (BY OTHERS)



Required for powered units; optional for unlit units

CANOPY/DRESS PLATE FINISH OPTIONS



BLACK

WHITE









Part Number Specification

LA2 SLIM

SPECIFICATION CODE LA2 - SLIN QTY.		pple: 2 QTY LA2-SLIM		- S	-		
SIZE 21.5D 33D 43D	ler Slim Ring(s). For each hoices; additional lead t 21.5" DIA 33" DIA 43" DIA 57.5" DIA	n number, make one	e selection and en nay apply.		nding box above.		
830CK 835CK 840CK	80 CRI / 2700K 80 CRI / 3000K 80 CRI / 3500K 80 CRI / 4000K 90 CRI / 2700K	930CK 935CK	90 CRI / 3000K 90 CRI / 3500K		SUSPENSION STD EXT*	12 —96 24 —240	_
CANOPY OPTION CCL CCN	CABLES TO CEILING CABLES TO CANOPY*	6 CANOPY CO	WHITE		POWER CORD WH BK	WHITE BLACK	

*Indicates modified choices; additional lead times and/or costs may apply.





