




## OptConnect's first 5G dual-carrier router on the CAT M1 Network



### OptConnect mylo

Tenacious Connectivity, Magnetic Personality

Features	Advantages
<ul style="list-style-type: none"> <li>• <b>Plug-n-play</b> Connectivity</li> <li>• <b>Lightweight</b> 2.8 oz</li> <li>• <b>Compact size</b> 79.8 x 79.8 x 19.7 mm</li> <li>• <b>Temp resistance</b> -40c - +85</li> <li>• Magnetic Base</li> </ul>	<ul style="list-style-type: none"> <li>• Dual carrier redundancy  </li> <li>• Better building penetration</li> <li>• Primary network connectivity for POS, ATMs, etc.</li> <li>• Flexible and practical</li> <li>• Modular antenna</li> <li>• Flexible mounting options with integral magnetic base</li> <li>• Delivers speed and wide coverage (Cellular Technology 5G)</li> <li>• 5v power</li> <li>• Enables remote device connectivity</li> <li>• Save money, time and improve business efficiency</li> <li>• Always on</li> <li>• Low power consumption 5G 10-15 watts peak</li> <li>• Built-in Firewall – 2.2</li> <li>• DHCP server for local automatic IP assignment – can assign static IPs               <ul style="list-style-type: none"> <li>Public and Private IP modes for local IP assignment</li> <li>NAT with VPN Passthru</li> <li>Domain name addressable</li> </ul> </li> <li>• Edge decision making – processing – WRT</li> </ul>
Additional Features	
<ul style="list-style-type: none"> <li>• Cost-effective replacement for landline dial-up circuits or analog cell-phones – Primary connectivity for PLCs, RTUs, POS, ATM solutions</li> <li>• Speed optimized for transactional / sensor data transmission</li> <li>• Full duplex transceiver ethernet port</li> <li>• LED network status indicators</li> <li>• Remotely manageable and upgradeable</li> </ul>	

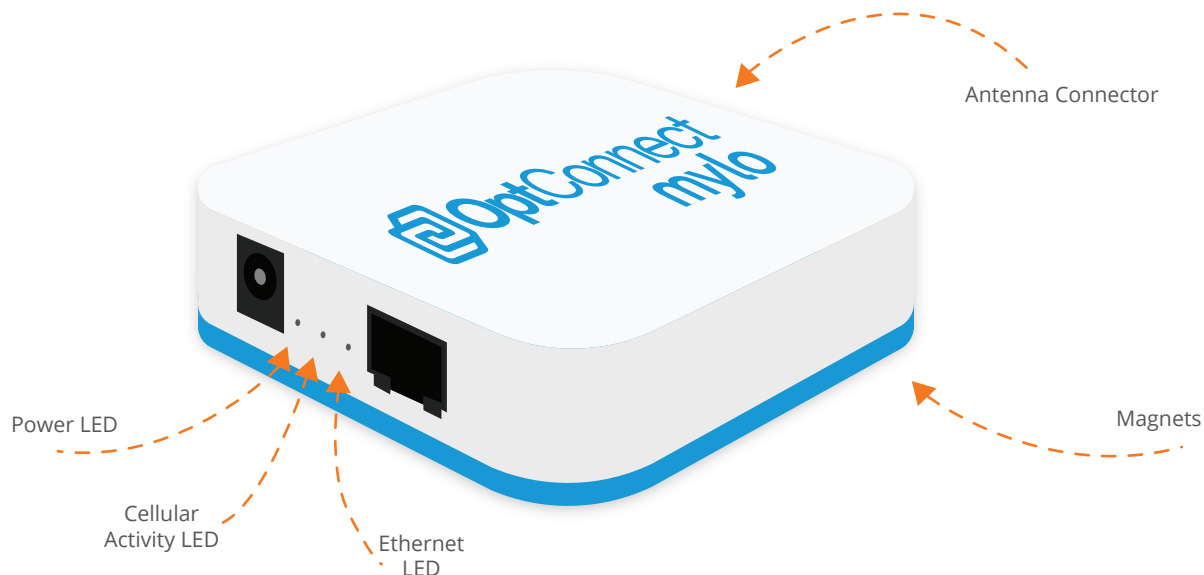

Wireless WAN	
GSM	2G fallback
LTE	LTE-FDD: B1[2100], B2[1900], B3[1800], B4[1700], B5[850], B8[900], B12[700], B13[700], B18[850], B19[850], B20[800], B26[850], B28[700], LTE-TDD: B39[1900] (LTE-M only)
WWAN Embedded Module	Quectel-QBG96
SIM Slots	1 internal 3FF Micro-SIM Slot
Antenna Connectors	1 x 50 Ω SMA (Center pin: female)
Ethernet	
Ports	1
Connector	RJ-45
Standard	IEEE 802.3
Physical Layer	10/100 Base-T
Data Rate	10/100 MBit/s
Mode	Full or Half duplex
Interface	Auto MDI/MDIX
Management	
Fully Managed Service	Logistics, fulfillment, 24x7 support, APIs, OptConnect Summit
Processor and Memory	Logistics, fulfillment, 24x7 support, APIs, OptConnect Summit
Protocol Support	HTTP, HTTPS, FTP, SSL
Power	
Input	5 VDC (power supply with barrel connector included)
Consumption	Typical: 3.5 W; Max: 15 W
General	
LEDs	Power On, LAN Connection, WWAN Service
Relative Humidity	5% to 95% (non-condensing)
Approvals	
GSM/CDMA	Verizon ODI, PTCRB
Carrier Certifications	Verizon, AT&T, others

**Need more information?**

Call our sales team at 1-877-678-3343