

## Gemini Antenna



Industrial grade, versatile small size, high performing ultra-wideband cellular antenna with both a primary and diversity leads (MIMO) in a single base. Rated for outdoor use. Easy to install with a magnetic mount that can be used on any ferromagnetic (iron or steel) metal surfaces.

Ideal for multipurpose applications where a magnetic mount can be utilized. Can be used in outdoor settings.

Part Number	Mount Type
OC-1062	Magnetic Mount


### Specifications

Dimensions	2.1" X 2.7" X 2.3"
Weight	0.3 lbs

### Applications

ATMs, Digital Signs, Kiosk, Vending Machine, Gaming Equipment, Access Controls, HVAC, Alarm Panels, Amusement, Credit Card Terminal, Juke Box, Laundry Equipment, Monitoring Equipment, Smart Safe, Smart Locker, Petroleum Gauges,



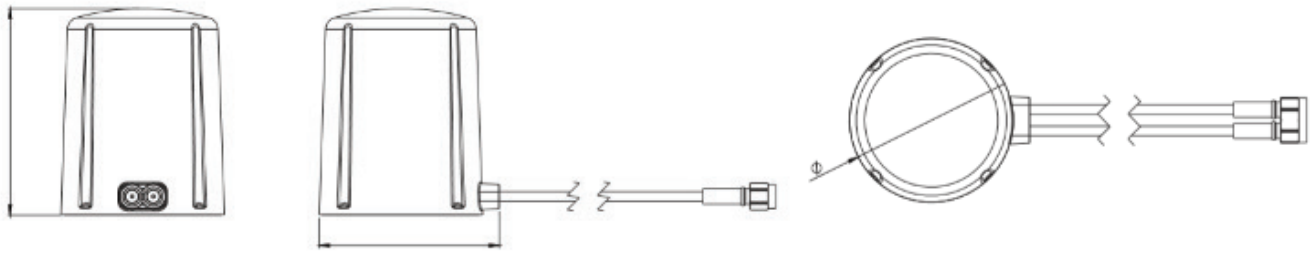

## Gemini Antenna Technical Specifications

Electrical Specifications	
Frequency	698 - 960 MHz, 1710 - 2170MHz 2500-2700 MHz
Nominal Impedance	5 $\Omega$
VSWR	<2.7:1 @ 698-960 <1.5:1 @ 1710-2170 <1.4:1 @ 2500-2700
Radiation Pattern	Omni -Directional
Average Gain	4.2 dBi @ 698-960 2.9 dBi @ 1710-2170 3.0 dBi @ 2500-2700
Peak Gain	0.1 dBi @698-960 2.9 dBi @ 1710-2170 3.5 dBi @ 2500-2700
Polarization	Linear
Environmental Specifications	
Operating Temperature	-40 to +85 C    -40 to 185 F
Storage Temperature	-40 to +85 C    -40 to 185 F
Substance Compliance	RoHS
Ingress Protection Rating	IP67 & IP69 Weatherproof Rated

**Need more information?**

Call our connectivity experts at 1-877-678-3343