

## Lyra Antenna




The Lyra Antenna is a small, high-performing antenna that comes standard with OptConnect mylo. With a magnetic mount that can be used on any ferromagnetic (iron or steel) metal surfaces, it is ideal for ATMs, POS, sensor applications, and more. The Lyra Antenna delivers stable omni-directional gain and efficiencies across all common 4G/5G, cellular bands.

Part Number	Mount Type
OC-1080	Magnetic Mount
Specifications	
Dimensions	31 x 94 mm
Cable Length	300 cm
Applications	

ATMs, POS, sensor applications, and more.



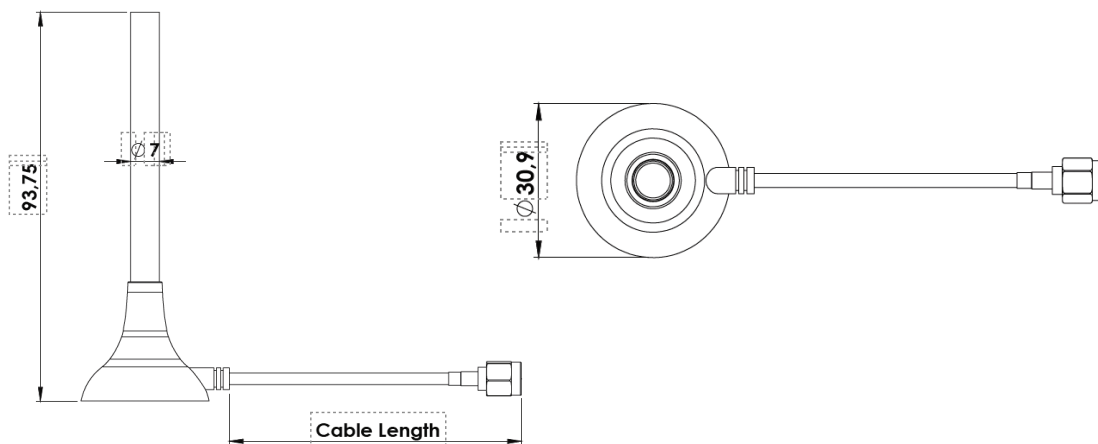

Gemini Antenna Technical Specifications	
<b>Electrical Specifications</b>	
Frequency	698 - 960 MHz, 1710 - 2170MHz 2500-2700 MHz
VSWR	1.7:1 @ 698-960 1.7:1 @ 1710-2170 1.8:1 @ 2500-2700
Radiation Pattern	Omni-Directional
Average Gain	-1.6 dBi @ 698-960 -2.7 dBi @ 1710-217 -2.9 dBi @ 2500-2700
Peak Gain	2.2 dBi @698-960 2.2 dBi @ 1710-2170 2.7 dBi @ 2500-2700
Polarization	Linear
<b>Environmental Specifications</b>	
Operating Temperature	-40 to +85 C    -40 to 185 F
Storage Temperature	-40 to +85 C    -40 to 185 F
Substance Compliance	RoHS

**Need more information?**

Call our connectivity experts at 1-877-678-3343