

www.hormann-flexon.com



Speed-Commander™ 1200 Dock-Master / Screen-Master®

**Economical solution for loading dock door openings,
dumpster doorways and platform docks**




Simple design for no-frills applications

The Speed-Commander™ 1200 SEL Dock-Master / Screen-Master® is a heavy duty roll-up door intended for low-frequency use. Designed to be raised or lowered with a constant pressure push button at a speed of 14" per second, it is perfect for door openings where overhead and sectional doors are installed. The basic non-timer control box has a 230 v / 3 phase / 60 Hz power requirement. Standard operation is hold to open / hold to close, and when automatic closing is required, an optional built-in light grid is included.




Light grid available for added protection

Basic operation is hold to open / hold to close, and when automatic closing is required, an optional built-in light grid is included. Completely free of coil cords, the light grid provides a thorough wall of protection for personnel and equipment in the doorway, as compared to other doors that use only photocells. The light grid also eliminates the need for a panel reversing edge, which is typically vulnerable to damage, resulting in a reduction in maintenance and downtime. Full perimeter draft seals reinforce general environmental control.

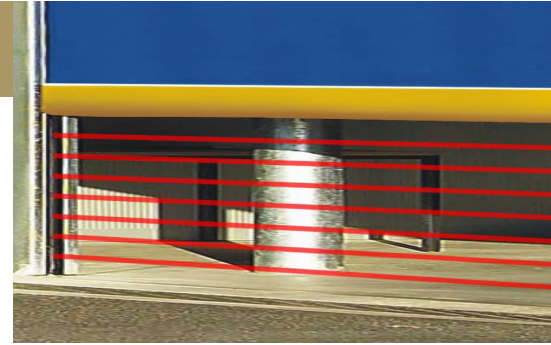

Optional screen panels for ventilation

The Dock-Master / Screen-Master® comes in a sectional panel design. The panels are connected using aluminum profiles which allows for fast panel replacement when required. Our high-strength, polyester mesh screen material can be interchanged with the solid panels in order to provide ventilation during the warmer months. This panel can be easily interchanged without special tools, and is the solution to help prevent airborne contaminants such as birds and insects from entering the building.

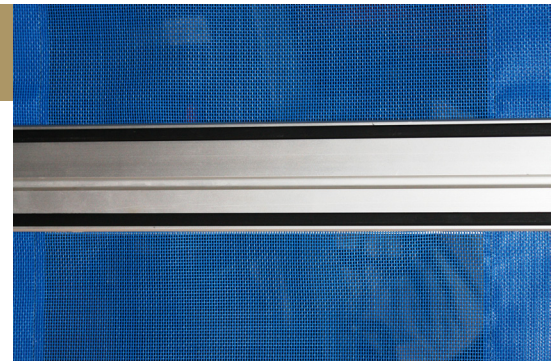

Proven and tested features

- Application: Interior door openings up to 14'0" wide x 14'0" high. Exterior door openings up to 10'0" wide x 10'0" high. With screen material up to 14'0" wide x 14'0" high.
- Operating Speed: Up to 14" per second up and down.
- Panel: Interior door openings: 58 oz. / sq. yard reinforced PVC. Colors: Orange, blue, yellow, red and gray. Exterior door openings: High-impact, tear-resistant material. Colors: Black and blue.
Optional: High-strength, royal blue, polyester mesh screen material.
- Vision: Optional: Full-width, clear PVC starting approximately 52" off floor.
- Motor: Compact, self monitoring direct-drive motor is maintenance free.
- Protection: A built-in light grid is optional for applications that demand added protection of personnel and materials.



The motor and panel material are guaranteed to be free of defects in materials and workmanship for 3 years. All other mechanical and electrical components are warranted to be free of defects for 1 year.

