


DASH DISASSEMBLY INSTRUCTIONS

1. Remove (1) screw on upper lip of A/C and heater controls.
2. Remove (2) screws above radio opening.
3. Remove (4) screws securing factory radio. Slide unit forward enough to disconnect power, speaker and antenna connections. Remove radio.
4. Install radio into kit. Break away side brackets of GMK-407 leaving 2 on top and 2 on bottom. Follow radio manufacturer's wiring instructions.
5. Re-install entire assembly as illustrated. Re-assemble dash by reversing steps 1-3.

Fig. A

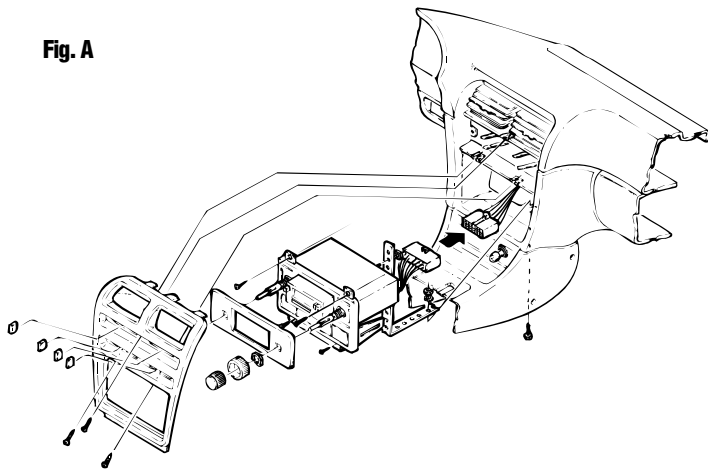


DIN RADIO KIT ASSEMBLY

1. If you have a DIN-style radio, carefully break out the shaft radio mounting provisions to accept the DIN radio mounting sleeve. Mount the DIN Radio mounting sleeve into the opening as per the radio manufacturer's instructions.

NOTE: Remove All Side Tabs. Only keeping the 4 screw locations on the top and bottom.

Fig. B

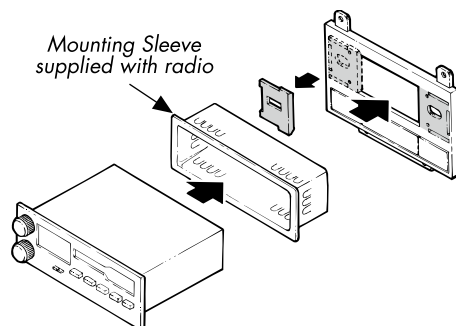

Automotive Products Division

1040 Avenida Acaso • Camarillo, CA 93012, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777

iGMK407



American International

Car Stereo Installation Kits & Accessories



GMK407 Mounting Kit

VEHICLE APPLICATIONS

GEO

1992-94 METRO

Suzuki

1992-94 SWIFT

Note: Dash bezel modification may be required on vehicles