


For information about other American International automotive accessories visit our website at:

<http://www.americaninternational.net>



**American
International**
Car Stereo Installation Kits & Accessories

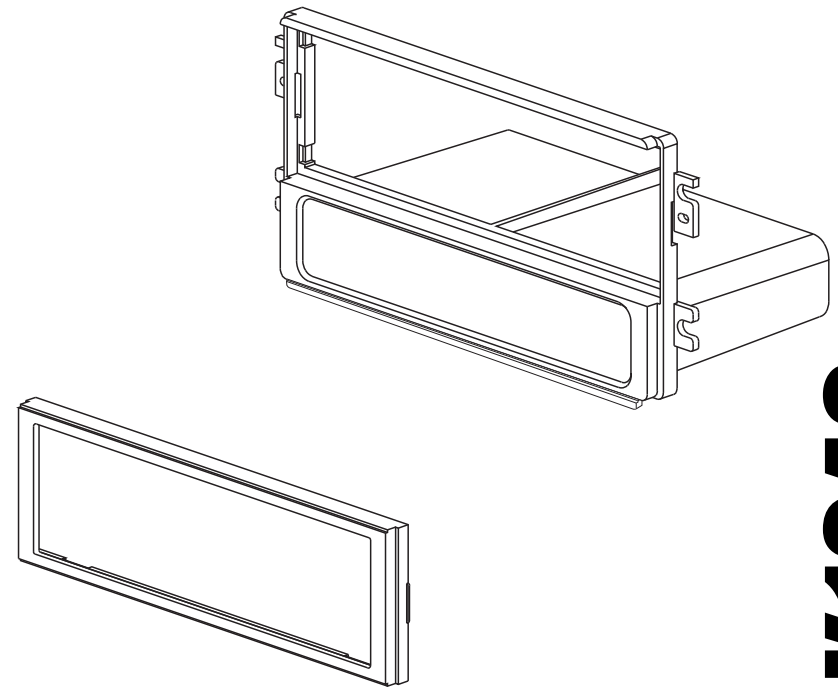

KIAK1240 Mounting Kit

VEHICLE APPLICATIONS

KIA

2001-05 OPTIMA
2001-05 RIO
2002-05 SEDONA
1999-02 SEPHIA
2000-03 SPECTRA
1998-02 SPORTAGE

CUSTOMER HELP LINE
USA 800-323-4329 • Canada 800-245-8777

iKIA1240

1999-02 Kia Sephia
2000-03 Kia Spectra

For 2002-03 Spectra Kit Assembly
instructions see page 5

DASH DISASSEMBLY

1. Remove the (2) Phillips screws above the instrument panel gauges.
2. Remove the (3) Phillips screws from the bottom side of the steering wheel column.
3. Carefully remove the steering column cover.
4. Carefully unsnap the Radio/ instrument cluster trim panel.
5. Disconnect all harnesses from the instrument trim panel, and remove the trim panel.
6. Remove the (4) Phillips screws securing the radio to the sub-dash.
7. Carefully pull the radio forward, disconnect the wire harness and antenna lead and remove the radio.

2001-05 Kia Rio


DASH DISASSEMBLY

1. Remove the ashtray.
2. Remove the (1) Phillips screw from inside the ashtray location.
3. Remove the button on the lever below the heater, A/C control knobs.
4. Gently unsnap the trim from around the Radio/ heater A/C controls and remove.
5. Remove the (2) Phillips screws securing the radio to the sub-dash.
6. Carefully pull the radio forward, disconnect the wire harness and antenna lead and remove the radio.

1998-2002 Kia Sephia/
2000-01 Kia Spectra
2001-05 Rio

For 2002-03 Spectra Kit Assembly
Instructions see page 5

KIT ASSEMBLY INSTRUCTIONS

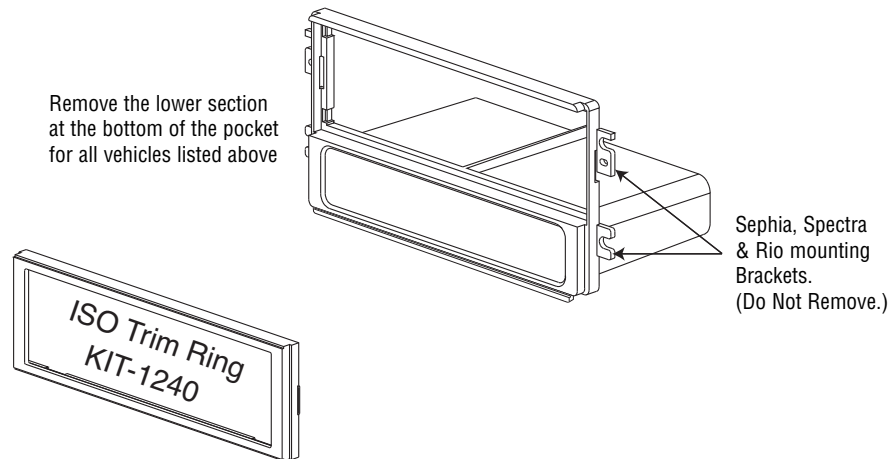


2002-05 Kia Sedona

DASH DISASSEMBLY

1. Set the emergency brake.
2. Open the ashtray lid and remove the ash cup.
3. Remove the (1) Phillips screw from under the ash cup location.
4. Carefully unsnap the ashtray assembly / dash trim bezel, disconnect all harnesses from the ashtray / lighter assembly and remove the trim.
5. Remove the (4) Phillips screws securing the climate control panel to the sub-dash.
6. Turn the ignition key to the on position, depress the brake pedal and place the shift lever in the LOW position.
7. Carefully pull the Climate control panel / vent assembly forward, disconnect all harnesses connected to the control panel / vent assembly, and remove the panel.
8. Remove the (4) Phillips screws securing the factory radio to the steel sub-dash frame.
9. Gently pull the radio forward, disconnect the wire harness and antenna lead, and remove the radio.


KIT ASSEMBLY INSTRUCTIONS

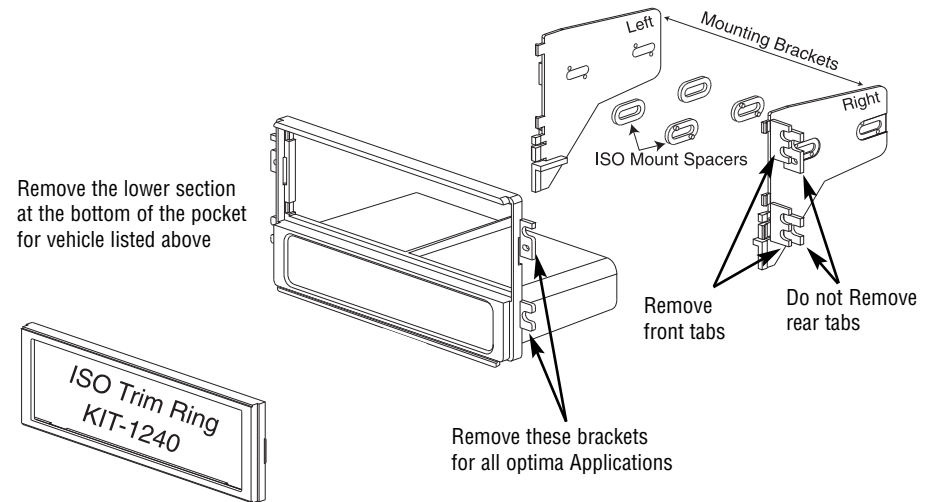

ISO MOUNT ASSEMBLY INSTRUCTIONS

ISO MOUNT RADIOS ONLY

1. Insert shaft spacers into ISO mount brackets (see Figure B).
2. Attach left and right ISO mounting brackets to main bracket.
3. Install ISO trim ring into main bracket.
4. Install radio into kit using screws supplied with radio (do not tighten screws at this time).
5. Adjust radio forward or backward for best look.
6. Tighten screws after adjusting radio.

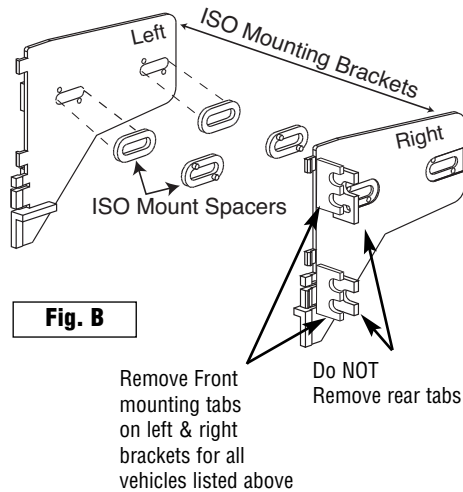


2001-05 Kia Optima

DASH DISASSEMBLY

1. Open the ashtray.
2. Starting at the bottom, carefully unsnap the trim bezel around the radio.
3. Disconnect all harnesses from the climate controls, hazard button and clock and remove the trim bezel.
4. Remove the (4) phillips screws securing the radio to the sub-dash.
5. Pull the radio forward, disconnect the wire harness and antenna lead and remove the radio.

KIT ASSEMBLY INSTRUCTIONS


do not Remove the lower section at the bottom of the pocket for all vehicles listed above

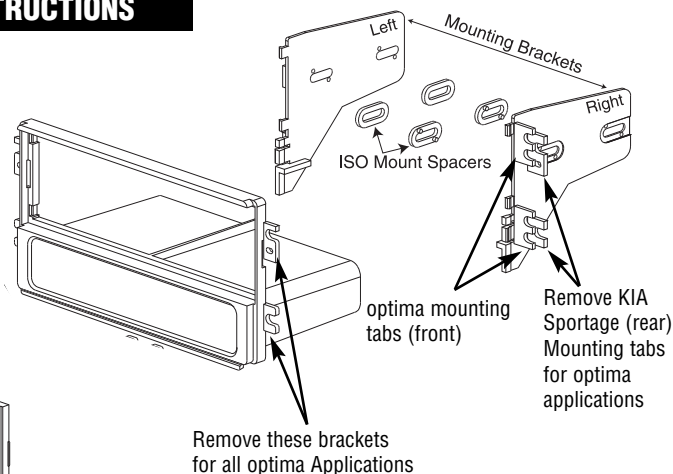

ISO MOUNT ASSEMBLY INSTRUCTIONS

ISO MOUNT RADIOS ONLY

1. Remove mounting tabs from both sides of ISO mount brackets for these vehicle applications.
2. Insert shift spacers into ISO mount brackets (see Figure A).
3. Attach left and right ISO mounting brackets to main bracket.
4. Install ISO trim ring into main bracket.
5. Install radio into kit using screws supplied with radio (do not tighten screws at this time).
6. Adjust radio forward or backward for best look.
7. Tighten screws after adjusting radio.

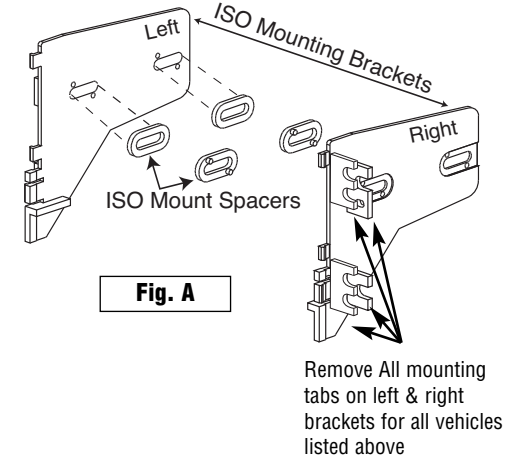

1998-2000 Kia Sportage

DASH DISASSEMBLY



1. Carefully unsnap the trim bezel from around the Radio/ heater/ A/C controls, disconnect all harnesses and remove the trim.
2. Remove the (4) Phillips screws securing the radio to the sub-dash.
3. Carefully pull the radio forward, disconnect the wire harness and antenna lead and remove the radio.

2001-02 Kia Sportage

DASH DISASSEMBLY


1. Remove the (2) Phillips screws above the instrument gauges.
2. Carefully unsnap the center Heater/ A/C vent panel, disconnect all harnesses and remove.
3. Remove the (1) Phillips screw from the far left side of the dash (you must open the driver door to access this screw)
4. Loosen the nut on the hood release cable from under the dash, and remove the (2) Phillips screws from beside the hood latch.
5. Remove the (2) upper top beauty covers hiding the 5/16 plastic bolts from the panel below the steering column. **(CONT.)**

- Remove the (2) upper 5/16 plastic bolts from this panel, and loosen the (2) lower plastic bolts to allow access to the (1) phillips screw securing the left sidepanel (with pocket). Remove this (1) Phillips screw and remove the side trim panel.
- Remove the (1) Phillips screw from under the edge of the dash below the dimmer control.
- Remove the (3) Phillips screws from the bottom of the steering column cover, and remove the top and bottom covers.
- Remove the (1) Phillips screw from under the upper edge of the dash in the center of the radio opening.
- Remove the (2) Phillips screws securing the drink tray to the dash panel and remove the drink tray.
- Carefully unsnap the dash trim and disconnect all harnesses and remove.
- Remove the (4) Phillips screws securing the radio to the sub-dash.
- Carefully pull the radio forward and disconnect the wire harness and antenna lead from the radio and remove radio.

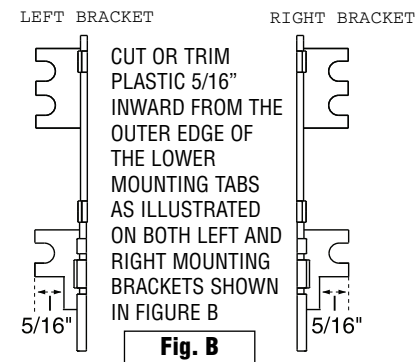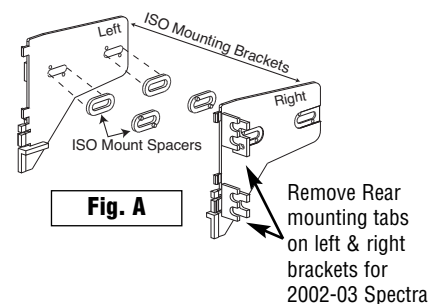

2002-03 Kia Spectra

KIT ASSEMBLY INSTRUCTIONS

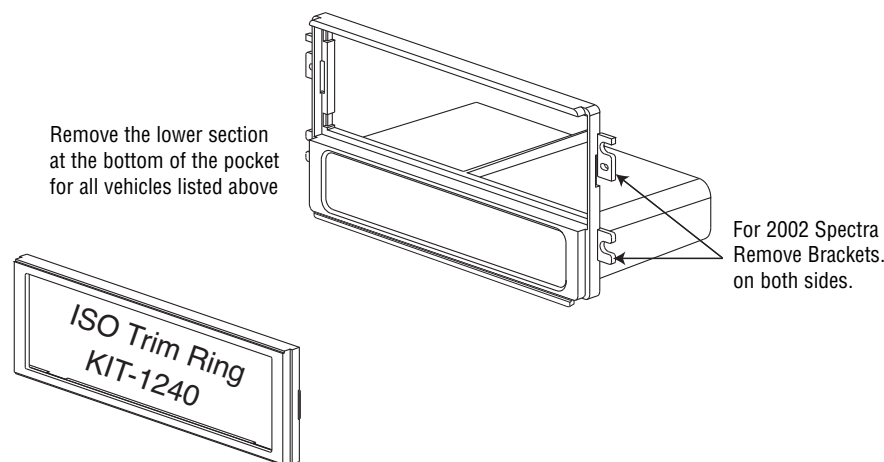

DIN & ISO MOUNT RADIOS

For DIN mount radios follow steps 1, 2, & 4 only.
For ISO mount installation follow all steps 1 thru 7.

- Remove the rear mounting tabs from both sides of mount brackets for this vehicle application (see Figure A).
- See note in Figure B.
- Only insert ISO spacers when ISO mounting radio. Insert spacers into ISO mount brackets (see Figure A).
- Attach left and right mounting brackets to main bracket.
- Install ISO trim ring into main bracket.
- Install radio into kit using screws supplied with radio (do not tighten screws at this time).
- Adjust radio forward or backward for best look.
- Tighten screws after adjusting radio.

1998-2002 Kia Sportage

KIT ASSEMBLY INSTRUCTIONS

