


For information about other American International automotive accessories visit our website at:

<http://www.americaninternational.net>



**American
International**
Car Stereo Installation Kits & Accessories

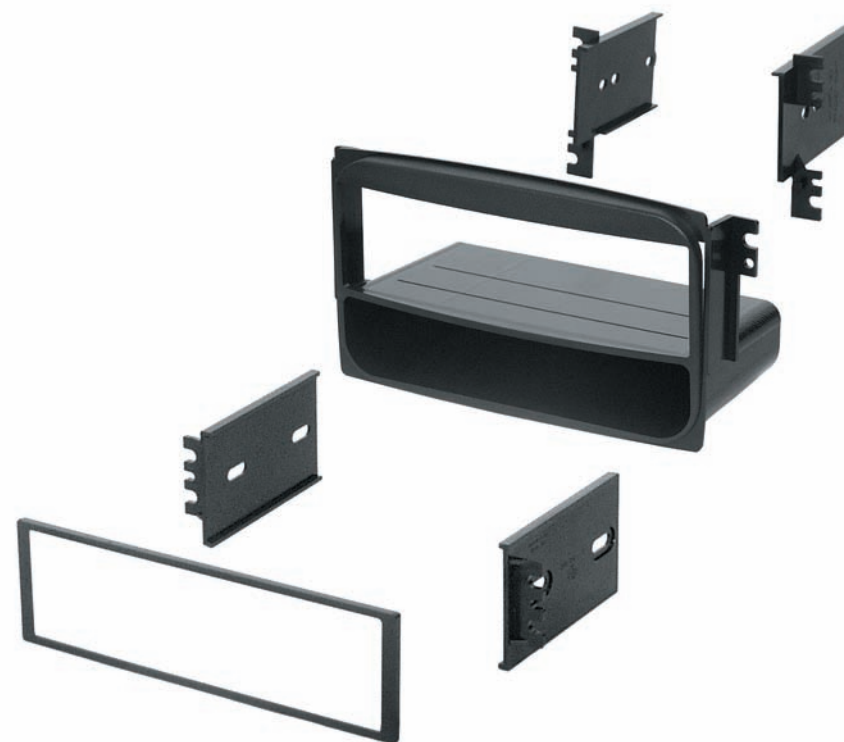

HYNK1416 Mounting Kit



American International

Automotive Products Division

1040 Avenida Acaso • Camarillo, CA 93012, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777

iHYNK1416

VEHICLE APPLICATIONS

Hyundai

- 1996-06 ELANTRA (Vehicle must have factory pocket below radio)
- 2001-05 SANTA FE (Vehicle must have factory pocket below radio)
- 1997-02 TIBURON (Vehicle must have factory pocket below radio)
- 1999-02 TIBURON (Oversized Radios)

1999-2002 HYUNDAI ELANTRA

DASH DISASSEMBLY INSTRUCTIONS

1. Gently pry upward on the trim around the gear shift lever.
2. Remove the (1) Phillips screw at the base of the radio trim bezel.
3. Remove the ashtray.
4. Carefully unsnap & remove the dimmer control from the radio trim panel.
5. Disconnect the Heater control cable from below the driver side of the dash.
6. Gently unsnap the Radio / Heater Trim Bezel.
7. Disconnect all harnesses & the single Vacuum hose coupler & remove the dash trim.
8. Remove the (4) Phillips screws securing the radio to the dash.
9. Pull the radio forward, disconnect the harness and antenna lead & remove.

1999-2002 HYUNDAI TIBURON (w/Pocket below Radio)

DASH DISASSEMBLY INSTRUCTIONS


1. Gently pry upward on the trim around the gear shift lever.
2. Remove the (1) Phillips screw at the base of the radio trim bezel.
3. Remove the ashtray.
4. Carefully unsnap & remove the dimmer control from the radio trim panel.
5. Disconnect the Heater control cable from below the driver side of the dash.
6. Gently unsnap the Radio / Heater Trim Bezel.
7. Disconnect all harnesses & the single Vacuum hose coupler & remove the dash trim.
8. Remove the (4) Phillips screws securing the radio to the dash.
9. Pull the radio forward, disconnect the harness and antenna lead & remove.

1999-2002 HYUNDAI TIBURON (Full Size Radio /No Pocket)

DASH DISASSEMBLY INSTRUCTIONS

1. Gently pry upward on the trim around the gear shift lever.
2. Gently un-snap and pull forward on the radio trim bezel.
3. Disconnect harness and remove the trim bezel.
4. Remove the (4) Phillips screws securing the radio.
5. Slide the radio forward & disconnect the wire harness & antenna leads.
6. Remove the radio.

Figure A

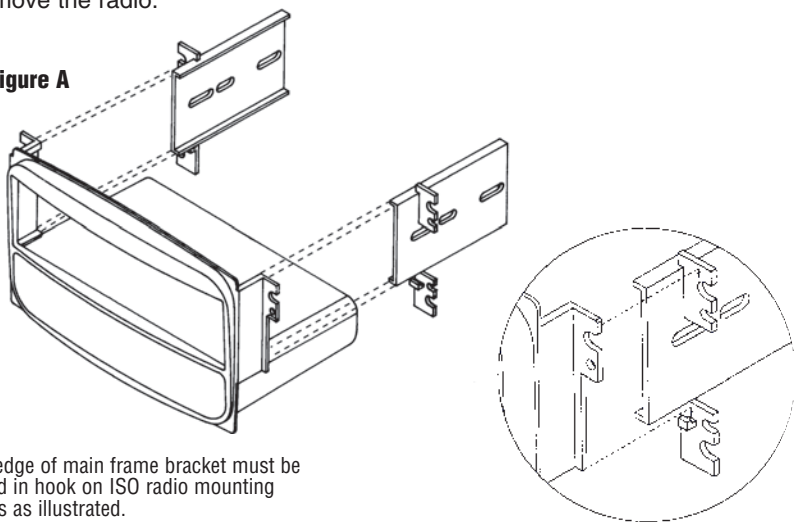

NOTE:

Lower edge of main frame bracket must be engaged in hook on ISO radio mounting brackets as illustrated.

VEHICLES (w/Pocket Below Radio)

RADIO INSTALLATION INSTRUCTIONS

1. Attach left & right mounting brackets to the sides of the radio using screws supplied, (brackets may need to be adjusted forward or backward depending on radio) start with the radio mounted as far forward as possible in the brackets.
2. Mount radio into dash using existing screws from factory radio.
3. Place trim ring around the face of the radio.
4. Reassemble dash trim bezel, if the radio is too far forward, remove the dash bezel, adjust the radio mounting brackets forward on the radio.
5. Repeat steps 3 & 4 to obtain optimum look, making sure the dash trim bezel holds the trim ring against the face of the radio. Once you have obtained the correct positioning, wire your radio, plug in your antenna lead, & mount the radio to the subdash.
6. Re-install the factory pocket.
7. Re-assemble dash.

1999-2002 HYUNDAI TIBURON

RADIO INSTALLATION INSTRUCTIONS

1. Loosely attach left and right brackets to your radio using screws provided (do not tighten at this time).
2. Slide radio and bracket assembly into the face of the kit and lock the kit into the slots on the brackets (see Figure A).
3. Adjust the depth of the radio nose either forward, or backwards for the Desired look, and tighten the mounting screws when done.
4. Plug wire harness and antenna lead into the radio.
5. Slide the radio into the dash cavity.
6. Secure the radio to the subdash using the factory mounting screws.
7. Reassemble dash in reverse of dash disassembly instructions.