




American International

KIA-K1254

2003-04 KIA SORENTO EX

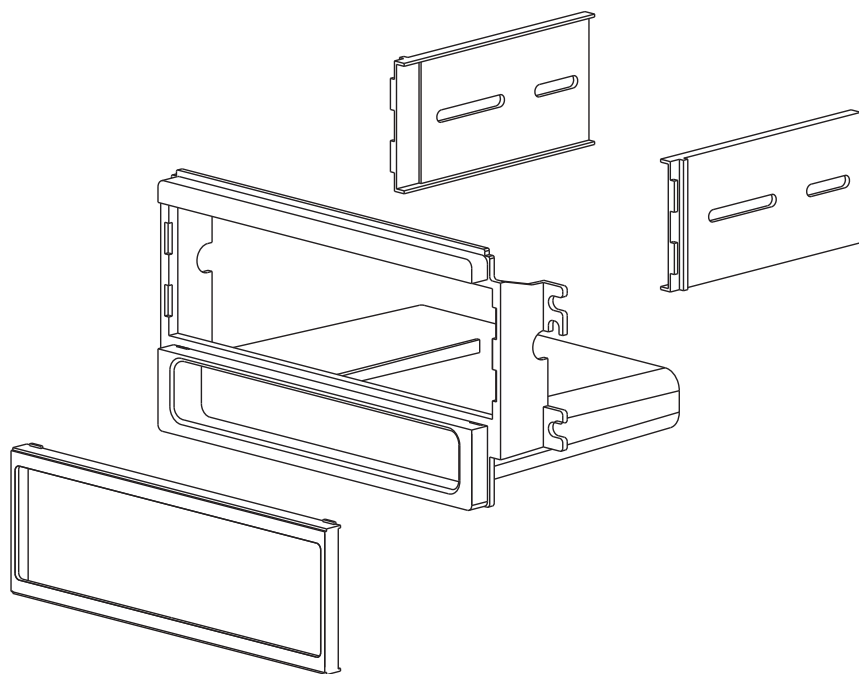

*NOTE: For KIA Sorento LX use KIA-K1258

RADIO INSTALLATION KIT

DASH DISASSEMBLY INSTRUCTIONS

2003-04 KIA SORENTO EX

- 1) CAUTION: You must start at the bottom of the side trims in (STEP 2) of this instruction and follow carefully, or damage to the trims will occur. These trims are very delicate.
- 2) Starting at the bottom and working your way to the top, Using a panel removal tool, carefully pry outward to unclip the left and right side (front portion only) narrow dash trim pieces that go from the sides of the ash tray to beside the radio. Pull upward to release the clips from the top portion of each trim, then pull towards you to release the trims and remove.
- 3) Remove the (6) Phillips screws that are securing the top section of the radio trim bezel.
- 4) Remove the (2) Phillips screws that are securing the lower section of the radio trim bezel.
- 5) Carefully pull the trim bezel forward, disconnect the harnesses from the rear of the bezel and remove bezel.
- 6) Remove the (4) Phillips screws securing the radio to the sub-dash, pull the radio forward, disconnect the wire.


DIN MOUNT INSTRUCTIONS

- 1) Insert DIN sleeve from your new radio into the opening of the installation kit.
- 2) Depress the tabs from inside the sleeves opening upward, outward, and downward to secure sleeve to the installation kit.

ISO MOUNT INSTRUCTIONS

- 1) Attach ISO mount brackets to rear of kit as shown in Figure A.
- 2) Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or screws supplied with kit.
- 3) Attach ISO trim ring to face of kit.
- 4) Slide radio forward or backward for desired look and tighten screws.

INSERT ISO MOUNT BRACKETS AS SHOWN AND ATTACH TO THE LEFT SIDE AND RIGHT SIDE OF MAIN BRACKET (#KIA-K1254) ONLY WHEN ISO MOUNTING RADIO.

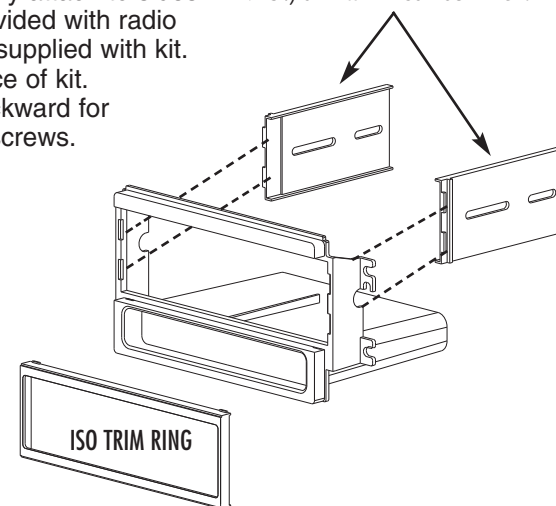

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777