

Stinger SRX-JW18128 - Technical Bulletin


Bluetooth Mic Replacement

The bluetooth microphone comes pre-installed on the SRX-JW18128 kit as it is integrated into the drivers side HVAC vent panel. If it becomes necessary to replace the microphone, follow the instructions below:


Microphone
Location




Step 1: Place the radio screen assembly face down on a soft surface. Remove the 4 phillips screws from the back of the top panel using a manual/hand screwdriver.

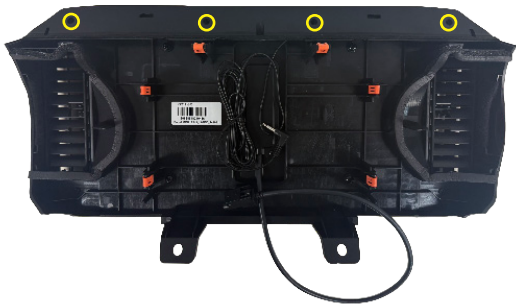


Step 2: Insert a flat head screwdriver into each of the 4 slots on the top panel and gently release the clip away from the assembly. Remove the panel when all clips are released.

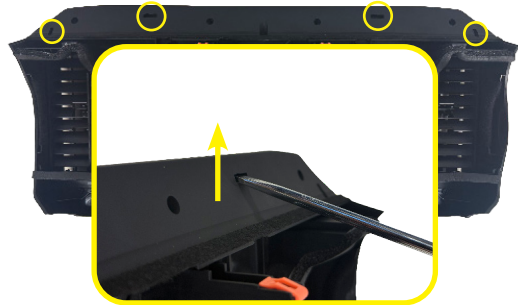

Step 3: Remove the two phillips screws securing the vent panel. Remove the mic wire from the retaining clips and remove the vent from the assembly.

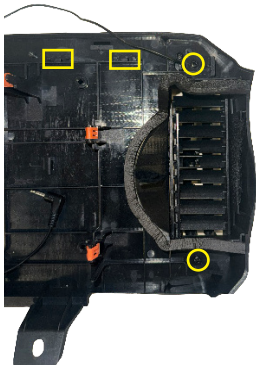

Step 4: Remove the phillips screw holding the mic in place. Remove the mic from the vent panel.

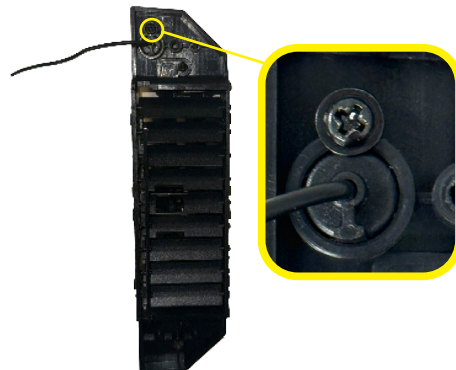

Replace the microphone and reverse the instructions to reassemble the vent and radio panel.