



**American
International**
Car Stereo Installation Kits & Accessories



American International

WWW.AIUS.NET

2500 East Francis Street Ontario, CA 91761, U.S.A.


USA Sales (800) 336-6500

Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777

iTOYK995

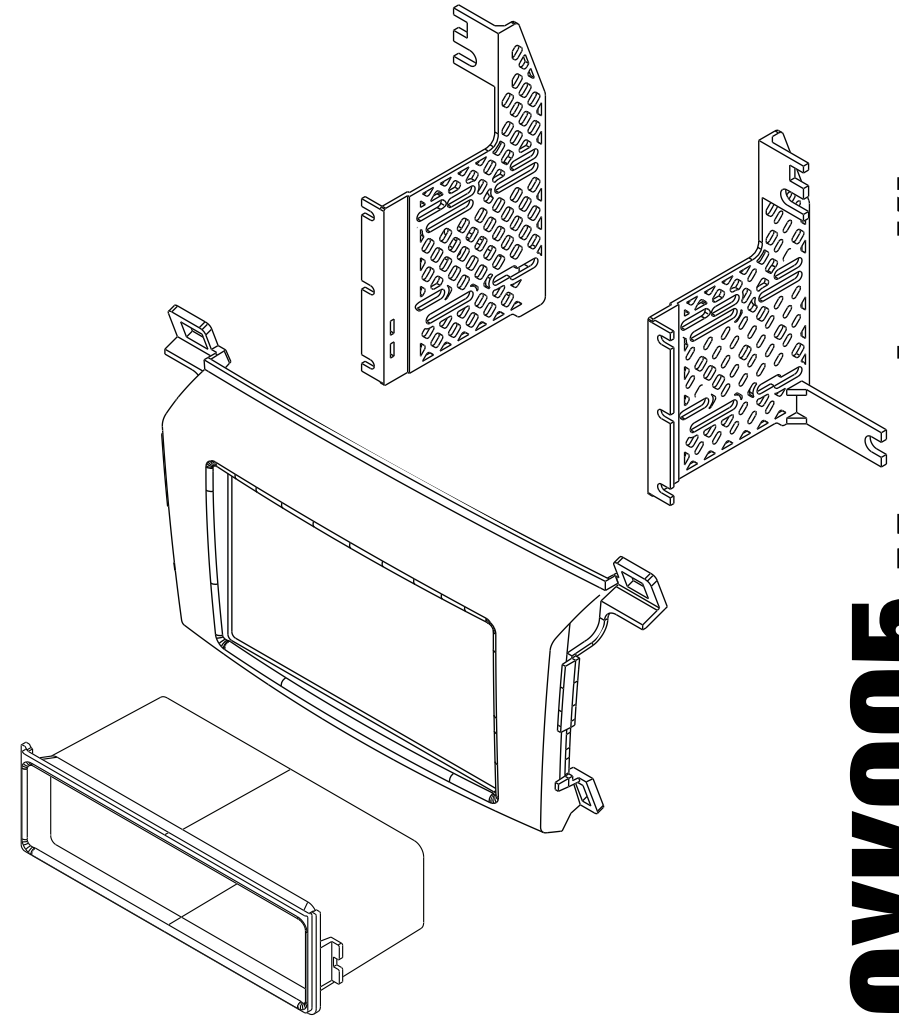

VEHICLE APPLICATIONS

Toyota
2012-14 RAV 4

TOYK995 Mounting Kit

DASH DISASSEMBLY AND RADIO REMOVAL


1. Using a soft tool, carefully un-clip and remove the top dash trim from the right to the left.
2. Using a soft tool, carefully un-clip and remove the air vents to the left and right of the radio.
3. Un-clip and remove the clock airbag light, do not unplug, place aside.
4. Remove (4) 10mm bolts from the bottom and top of the OEM Radio brackets.
5. Loosen the OEM radio and unplug all harness. Remove.

KIT ASSEMBLY INSTRUCTIONS

Single ISO Mount Applications

1. Insert pocket into lower section of the mounting brackets, snap into slots.
2. Install brackets to rear of main frame using the (6) screws provided.
(Do Not Over tighten).
3. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or screws supplied with kit.
4. Slide radio forward or backward for desired look and tighten screws.
5. Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio (optional).

FIG.A

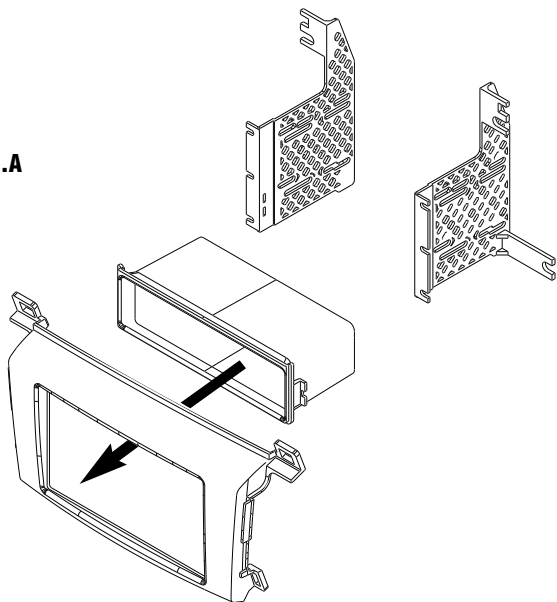

Double DIN Mount Applications on Back.

Double DIN Mount Applications

1. Install brackets to rear of main frame using the (6) screws provided.
(Do Not Over tighten).
2. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or screws supplied with kit.
3. Slide radio forward or backward for desired look and tighten screws.
4. Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio (optional).

FIG.B

