


For information about other American International automotive accessories visit our website at:

<http://www.aius.net>



**American
International**
Car Stereo Installation Kits & Accessories

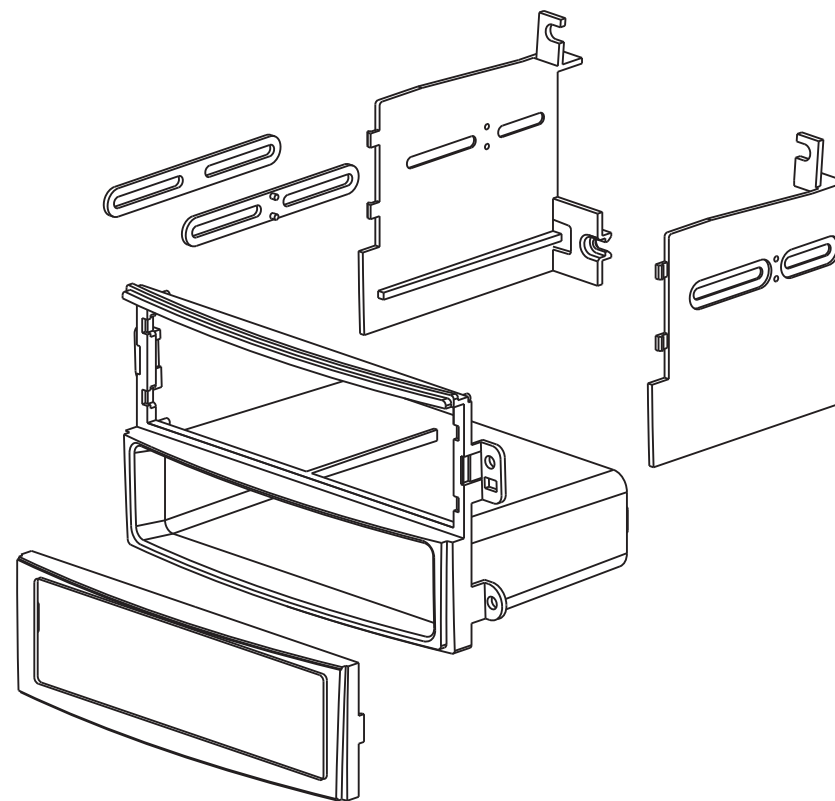

NDK740 Mounting Kit



American International

WWW.AIUS.NET

2500 East Francis Street Ontario, CA 91761, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777

INDK740

VEHICLE APPLICATIONS

NISSAN

2003-05

350 Z

DASH DISASSEMBLY INSTRUCTIONS

1. Disconnect the negative battery cable.
2. For automatic transmission vehicles: Remove the small trim ring from around the gear shift knob. For manual transmission vehicles: Carefully unclip the console boot(if equipped) or console panel with climate controls attached, remove the (2) phillips screws securing the climate control module box (white) pull forward and disconnect the harnesses attached to the climate control panel.
3. Remove the (2) Phillips screws securing the bottom of the dash/radio trim bezel located below the factory radio.
4. For vehicles without Navigation, open the upper dash trim pocket and remove the rubber matt from inside, and remove the (2) Phillips screws from this location. Pull upward on the pocket to remove. Remove the (2) Phillips screws from this location securing the radio/dash trim bezel to the sub-dash. For vehicles with Navigation, Very carefully pry upward on the navigation control panel, disconnect the harness and remove. Remove the (2) Phillips screws from this location.
5. NOTE: This is a very delicate dash bezel. Starting from the bottom, carefully pull radio & dash trim bezel forward (radio is mounted to the rear of the trim bezel), disconnect the upper gauge harness.
6. Carefully unplug and remove the wire harnesses and antenna lead from the radio and remove radio/dash trim bezel together.
7. Remove the (4) phillips screws securing the factory radio to the trim bezel and remove radio.

KIT ASSEMBLY INSTRUCTIONS

FOR DIN, ISO & SHAFT RADIO APPLICATIONS

1. Assemble kit as shown in illustrations below.
2. Attach assembled installation kit to the rear of the factory dash trim bezel using the (4) screws that were removed in step 7 of dash disassembly instructions.

DIN MOUNT INSTRUCTIONS

1. Insert radio sleeve into opening of kit and bend tabs upward, outward, and downward.

ISO MOUNT INSTRUCTIONS

1. Insert ISO trim ring into radio opening.
2. Slide radio in from behind
3. Loosely attach ISO mountable radio to left and right bracket of kit using (4) flat head phillips screws supplied with kit.
4. Slide radio forward or backwards for desired look and tighten mounting screws.

