

For information about other American International automotive accessories visit our website at:

<http://www.aius.net>



**American
International**
Car Stereo Installation Kits & Accessories



MAZK843 Mounting Kit



American International

2500 East Francis Street Ontario, CA 91761, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

VEHICLE APPLICATIONS

Mazda

2004-09 MAZDA 3

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777


iMAZK843

DASH DISASSEMBLY INSTRUCTIONS

1. NOTE: DO NOT! pry the right side of the radio display's thin trim bezel outward, you will break the bezel. Starting from the left side of the radio display trim, carefully pry the trim bezel outward to release the first of (4) panel fastener clips, then slide the trim to the left to un-hook the right edge of the trim bezel and remove trim.
2. Remove the (2) Phillips screws located at the top edge of the factory radio.
3. Carefully pull radio with attached upper display module forward, disconnect the wire harness and antenna lead from the back of the radio and remove radio.

KIT ASSEMBLY NOTES

1. Attach the metal panel fastener clips (included with kit) (1) to each lower mounting tab on the back side of the installation kit, see Figure A

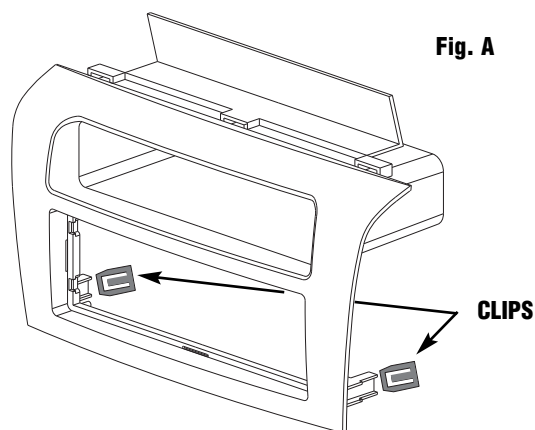

DIN MOUNT INSTALLATION INSTRUCTIONS

1. Attach left and right mounting brackets to the kit as shown in Figure B and secure brackets to rear of pocket using screws provided in kit.
2. Insert DIN sleeve from your new radio into the radio opening of the installation kit.
3. Depress the tabs from inside the sleeves opening upward, outward, and downward to secure sleeve to the installation kit.

NOTE: Optional ISO trim ring may be used in place of aftermarket radio's trim if trim is removable on radio and radio face is sized properly.

ISO MOUNT INSTALLATION INSTRUCTIONS

1. Attach left and right mounting brackets to the kit as shown in Figure B and secure brackets to rear of pocket using screws provided in kit.
2. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or screws supplied with kit.
3. Attach ISO trim ring to face of kit.
4. Slide radio forward or backward for desired look and tighten screws.

