» Y6 Light Aluminum



















- 600D PU coated polyester, 425GSM Matte coated PVC fabric.
- Water Resistant, Fire Retardant, UPF 50+.
- Wind resistance up to 30 MPH.
- Commercial aluminum frame, stainless steel bolts.
- Lightweight (42lbs), easy to transport.
- 1.77" Hexagonal leg diameter and 0.04" thick tubing.
- 5 sizes available, height adjustment in 3 positions.
- 5-year warranty for frames, 1-year warranty for fabrics.

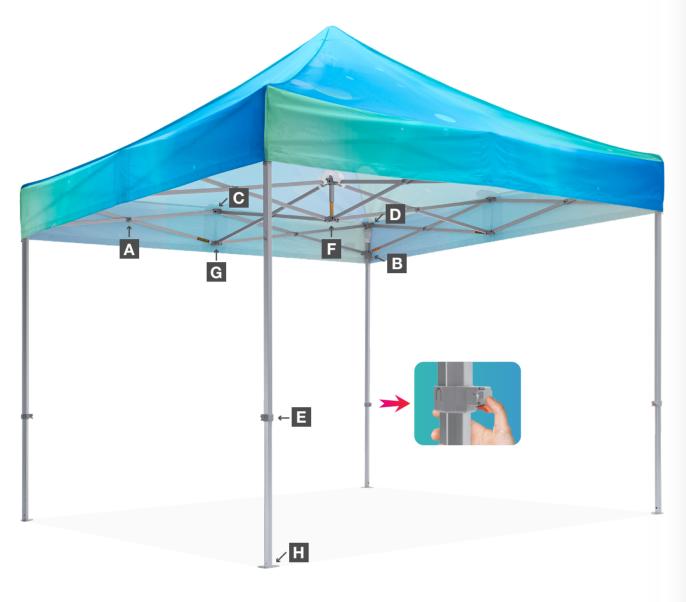

Frame Structure:



A Reinforced truss bar





B Push button system



F Center pole connector




C Center Pole Slide Connector D High-strength connector



H Extra wide foot plate **G** Truss Connector Lower

Specifications:

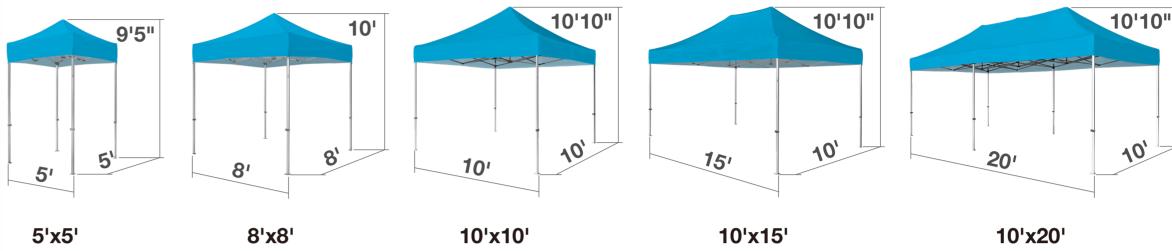


2,X2.	8.88.	10.710.		10.X12.	
Size					
5' x 5'	8' x 8'	10' x 10'	10' x 15'	10' x 20'	
Frame Material	6063-T5 High	6063-T5 High Strength Aluminum			
Peak Height					
9'5" (2.87m)	10' (3.04m)	3.04m) 10'10" (3.28m)			
Clearance Height					
3'12" / 5'2" / 6'1" /	′ 6′8" (1.22m / 1.58m	n / 1.87m / 2.03m)			
Frame Weight (lb)					
25.6 lb	31.3 lb	36.6 lb	47.8 lb	64.8 lb	
Out Leg	Hexagonal 1.7	Hexagonal 1.75" (45mm), 0.04" (1.0mm) gauge			
Truss Bar	1"x1/2" (25x12	1"x1/2" (25x12.5x1.0mm)			
Truss Bar Structure	Rectangle	Rectangle			
abric					
600D Polyester wit	th PU Coating / 425	GSM PVC Fabric with N	Matte Coating		
Fabric Function	Waterproof, C	Waterproof, CPAI-84 Fire Retardant, UV Protection			
Bracket Connectors	Nylon	Nylon			
Nuts & Bolts	Stainless Stee	Stainless Steel			
Foot Plate	Zinc Coated S	Zinc Coated Steel 3"x3"			
Height Adjuster	Push Button	Push Button			
Printing Method	Dye Sublimati	Dye Sublimation / Digital Printing			
Warranty	5 year	5 year			

Frame Structure



Reinforced Truss Bar



3 949-264-0801