» Y7 Heavy Duty Aluminum

















- 600D PU coated polyester, 425GSM Matte coated PVC fabric.
- Water Resistant, Fire Retardant, UPF 50+.
- Wind resistance up to 40 MPH.
- Heavy-duty aluminum frame, stainless steel bolts.
- Substantial weight (61 lbs), maximum durability.
- 2.25" Hexagonal legs and 0.07" thickest tubing.
- 8 sizes available, height adjustment in 3 positions.
- 10-year warranty for frames, 1-year warranty for fabrics.

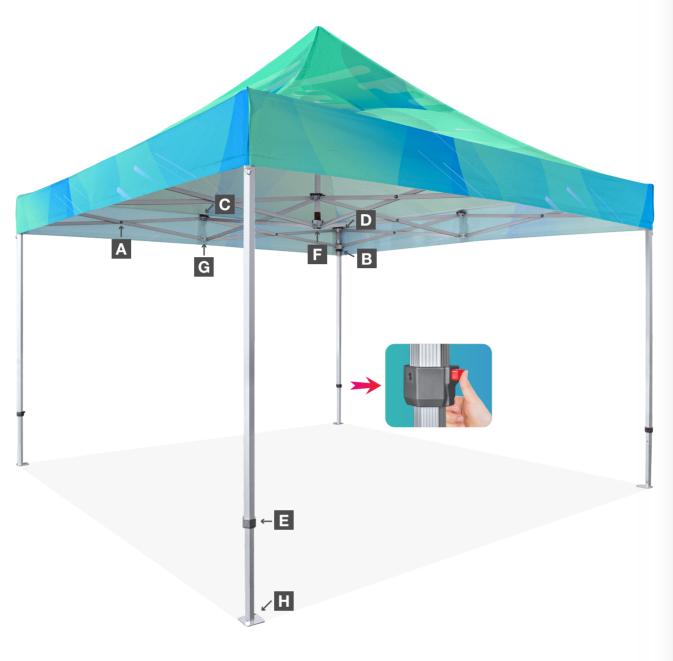

Frame Structure:




A Reinforced truss bar





B Push button system

F Center pole connector








G Truss Connector Lower





H Extra wide foot plate

Specifications:

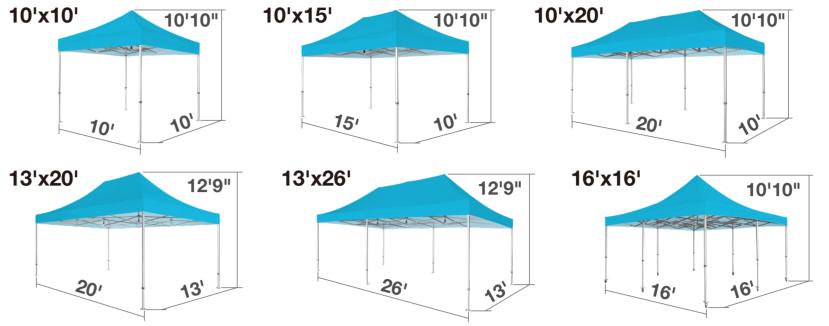

		•		·			
Size							
10' x 10'	10' x 15'		10' x 20'	13' x 20'	13' x 26'	16' x 16'	20' x 20'
Frame Material		606	6063-T5 High Strength Aluminum				
Peak Height							

10'10"(3.28m)	12'9"(3.89m)	10'10"(3.28m)	
Clearance Height			
5'2"/6'1"/6'8"(1.58m/1.87m/2.03m)	6'8" / 7'(2.03m / 2.13m)	5'2" / 6'1" / 6'8" (1.58m / 1.87m / 2.03m)	


Frame Weight (lb)							
61.1 lb	79.4 lb		107.6 lb	104.5 lb	142.2 lb	174.6 lb	213.8 lb
Out Leg Hexagonal 2.25" (57mm), 0.07" (1.8mm) gauge							

Truss Bar	1.4"x0.7"x0.07" (35x17x1.8mm) ribbed
Truss Bar Structure	Rectangle
Fabric	


600D Polyester with PU Coating / 425 GSM PVC Fabric with Matte Coating			
Fabric Function	Function Waterproof, CPAI-84 Fire Retardant, UV Protection		
Bracket Connectors	Aluminum Extruded,oxidated treatment		
Nuts & Bolts	Stainless Steel		
Foot Plate	Zinc coated Steel 4"x4"		
Height Adjuster Push Button			
Printing Method Dye Sublimation / Digital Printing			
Warranty	10 year		

Frame Structure

20'x20'



Reinforced Truss Bar



28 949-264-0801 sales@westshade.com 🔀