


Clamp Type Rubber Expansion Joint

TECHNICAL PARAMETERS

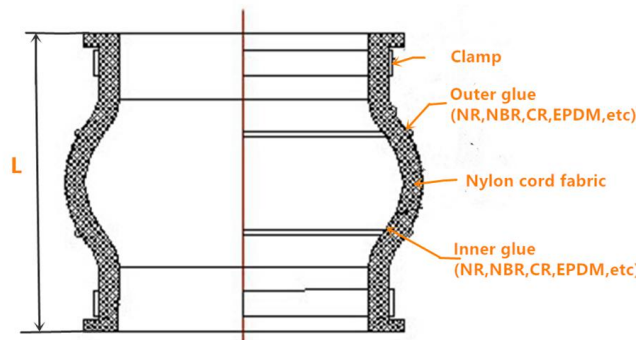


Item/ Model	1	2	3
Working pressure Mpa(kgf/cm ²)	1.0(10)	1.6 (16)	2.5 (25)
Explosive pressure Mpa (kgf/cm ²)	2.0 (20)	3.0 (30)	4.5 (45)
Vacuum Kpa (mm/Hg)	53.3 (400)	86.7 (650)	100 (750)
Applicable temperature °C	-15°C~+115°C special up to -30°C~+250°C		
Applicable medium	compressed air, water, sea water, hot water, oil, acid, etc		

Clamp rubber joints can be customized to any length, any caliber, any thickness. The clamp rubber joint saves flanges and bolts, saves engineering costs, and eliminates the need for flange at the nozzle, simplifying work efficiency.

MAIN DATA:

Nominal Diameter(DN)		Length	Axial Elongation	Axial Compression	The radial displacement	Deflexion angle
mm	inch	mm				
50	2	180	7	10	10	15°
65	2½	180	7	13	11	15°
80	3	180	8	15	12	15°
100	4	180	10	19	13	15°
125	5	180	12	19	13	15°
150	6	180	12	20	14	15°
200	8	200	16	25	22	15°
250	10	200	16	25	22	15°
300	12	200	16	25	22	15°
350	14	200	16	25	22	15°
400	16	200	16	25	22	15°
450	18	200	16	25	22	15°
500	20	200	16	25	22	15°
600	24	200	16	25	22	15°
700	28	200	16	25	22	15°
800	32	200	16	25	22	15°
900	36	200	16	25	22	15°
1000	40	200	18	25	22	15°
1200	48	200	18	25	24	15°
1400	56	200	20	26	24	15°
1600	64	200	25	26	26	15°
1800	72	200	20	26	26	15°
2000	80	200	20	26	26	15°

Notes:1.Please sent us letter and drawing for customization if you have special requirements.

 <p>河南顺赢新能源有限公司 Henan Shunying New Energy Co.,Ltd.</p>	Proposal/Inquiry/Order No:	NOTES:
	Customer Name:	
	Project Name:	
	Contractor:	