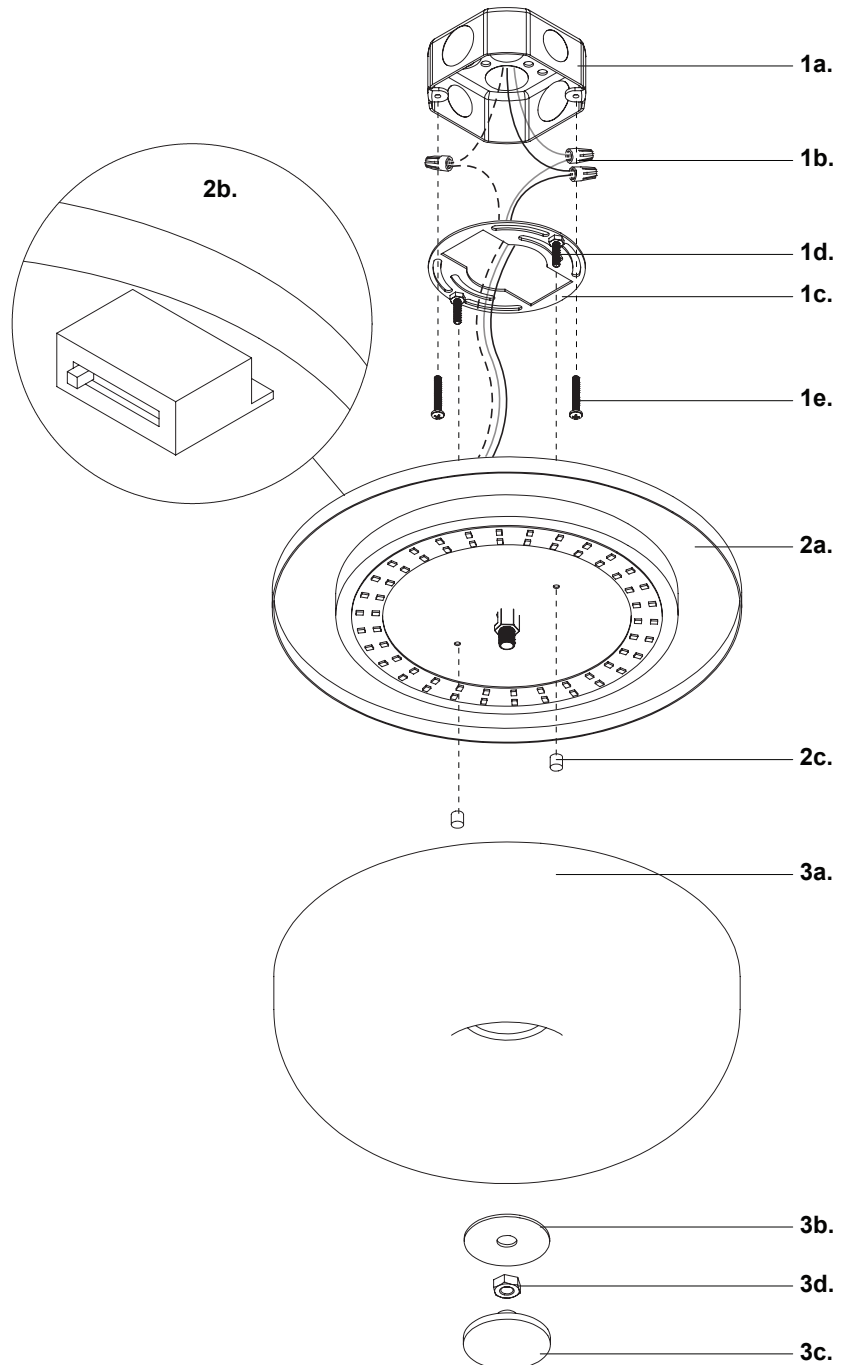# LED Flush Mount

START FROM HERE

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all times during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:
- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120-277V input

1. Remove fixture from its original package

2. Separate mounting plate **(1c)** from backplate **(2a)** by removing decorative nuts **(2c)**

3. Align mounting plate screws **(1d)** to desired orientation, and then attach mounting plate **(1c)** to electrical junction box **(1a)** using junction box screws provided **(1e)** in hardware package

4. Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **ground** to **"GND")** with wire nuts **(1b)** provided in hardware package

5. Choose color temperature by using slider **(2b)**

6. Align and insert mounting plate screws **(1d)** through holes on backplate **(2a)**, secure with decorative nuts **(2c)**

7. Attach shade **(3a)** to backplate **(2a)**, followed by washer **(3b),** nut **(3d)** and secure with finial **(3c)**