

# KUZCO LIGHTING

## LUMINAIRE PHOTOMETRIC REPORT

**Filename:** LP14947-BK - Chute

**Manufacturer:** Kuzco Lighting

**Luminaire:** CHUTE / Pendant

**Luminaire Cat:** LP14947-BK

**Lamp:** LED/ w DRIVER

**Lamp Cat:** UNKNOWN

**Ballast Cat:** HUEUC DR-CC-12

**Lamp Output:** Total luminaire Lumens: 1069.7

**Max Candela:** 295.2 at Horizontal: 90°, Vertical: 1.5°

**Input Wattage:** 20

**Luminous Opening:** Rectangle (L: 22.83", W: 22.83")

**Test:** 1308-19

**Test Date:** 15 March 2019

**Test Lab:** Kuzco Lighting

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Noncutoff




**Nema Type:** 7 X 7

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	227.8	21.3%
0-40	373.9	35%
0-60	677.1	63.3%
60-90	299.0	28%
70-100	216.5	20.2%
90-120	83.4	7.8%
0-90	976.1	91.3%
90-180	93.6	8.7%
0-180	1,069.7	100%

### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	27.8	2.6%	90-100	45.8	4.3%
10-20	79.5	7.4%	100-110	25.8	2.4%
20-30	120.5	11.3%	110-120	11.8	1.1%
30-40	146.1	13.7%	120-130	4.7	0.4%
40-50	155.0	14.5%	130-140	1.9	0.2%
50-60	148.2	13.9%	140-150	1.4	0.1%
60-70	128.3	12.0%	150-160	1.1	0.1%
70-80	100.2	9.4%	160-170	0.7	0.1%
80-90	70.5	6.6%	170-180	0.3	0%

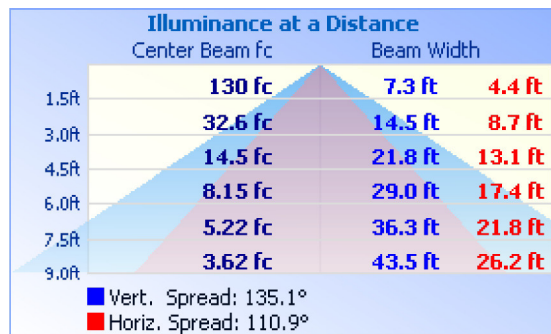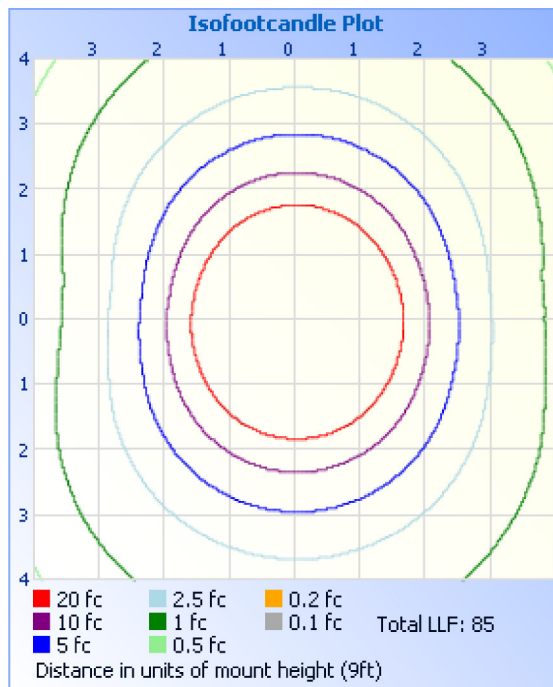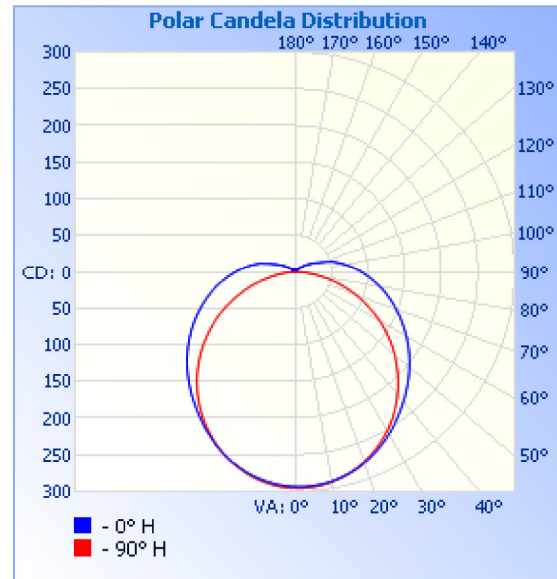

Photometrics Pro 1.3.29 copyright 2003-2020 by jSolutions, Inc.  
Reported data calculated from manufacturer's data file, based on IES recommended methods.