



Filename: PD19804-CH-UNV - Stylo

Manufacturer: KUZCO LIGHTING

Luminaire: PENDANT

Luminaire Cat: Stylo - PD19804 - CH - UNV

Lamp: DC LED Module with DC Driver

Lamp Cat: DC LED Module with DC Driver

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.15AMP ; Vout = 12 - 42VDC , Iout = 160mA

Ballast Cat: Novbo - NE007277016 - 2GH

Lamp Output: Total luminaire Lumens: 557.4

Max Candela: 69.6 at Horizontal: 90°, Vertical: 6°

Input Wattage: 7.2

Luminous Opening: Rectangle (L: 4.57", W: 10")

Test: 3614--25


Test Date: 10 September 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: Semi-Direct

Cutoff Class: Noncutoff

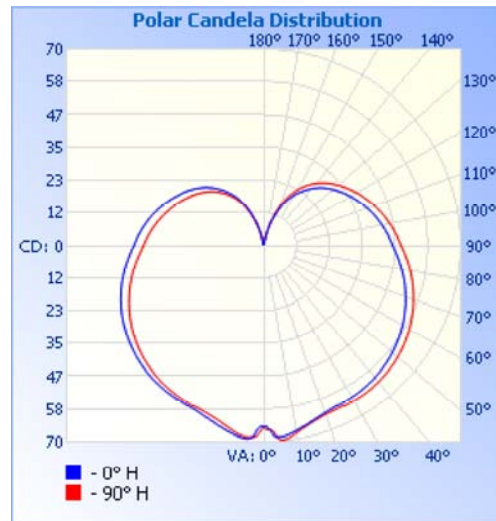


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	53.8	9.6%
0-40	92.6	16.6%
0-60	191.6	34.4%
60-90	161.2	28.9%
70-100	154.4	27.7%
90-120	127.8	22.9%
0-90	352.8	63.3%
90-180	204.6	36.7%
0-180	557.4	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	6.5	1.2%	90-100	48.0	8.6%
10-20	18.3	3.3%	100-110	43.0	7.7%
20-30	29.0	5.2%	110-120	36.8	6.6%
30-40	38.9	7.0%	120-130	29.9	5.4%
40-50	46.8	8.4%	130-140	22.6	4.1%
50-60	52.2	9.4%	140-150	14.9	2.7%
60-70	54.7	9.8%	150-160	7.6	1.4%
70-80	54.5	9.8%	160-170	1.7	0.3%
80-90	51.9	9.3%	170-180	0.1	0%

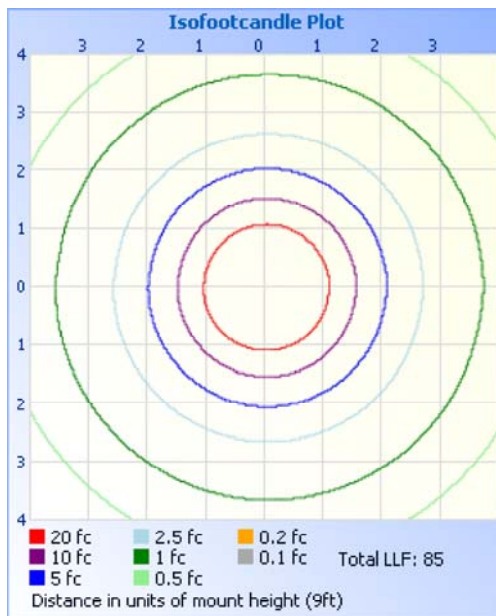

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	28.8 fc	
3.0ft	7.19 fc	
4.5ft	3.20 fc	
6.0ft	1.80 fc	
7.5ft	1.15 fc	
9.0ft	0.80 fc	