



**Filename:** PD68507-GBK-UNV - Hayden

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Hayden - PD68507 - GBK - UNV

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** DC LED Module

**Ballast Cat:** DC LED Module

**Lamp Output:** Total luminaire Lumens: 327

**Max Candela:** 64.0 at Horizontal: 270°, Vertical: 8°

**Input Wattage:** 9.4

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3713--25

**Test Date:** 02 October 2025

**Test Lab:** EVERFINE


**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Noncutoff

#### Zonal Lumen Summary

| Zone   | Lumens | % Luminaire |
|--------|--------|-------------|
| 0-30   | 52.4   | 16%         |
| 0-40   | 90.3   | 27.6%       |
| 0-60   | 182.3  | 55.7%       |
| 60-90  | 113.6  | 34.8%       |
| 70-100 | 87.2   | 26.7%       |
| 90-120 | 29.6   | 9.1%        |
| 0-90   | 295.9  | 90.5%       |
| 90-180 | 31.1   | 9.5%        |
| 0-180  | 327.0  | 100%        |

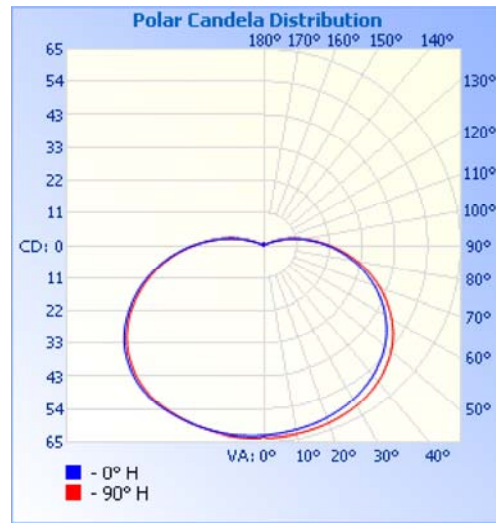

#### Lumens Per Zone

| Zone  | Lumens | % Total | Zone    | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10  | 6.0    | 1.8%    | 90-100  | 18.8   | 5.8%    |
| 10-20 | 17.7   | 5.4%    | 100-110 | 8.9    | 2.7%    |
| 20-30 | 28.6   | 8.8%    | 110-120 | 2.0    | 0.6%    |
| 30-40 | 38.0   | 11.6%   | 120-130 | 0.4    | 0.1%    |
| 40-50 | 44.6   | 13.6%   | 130-140 | 0.3    | 0.1%    |
| 50-60 | 47.3   | 14.5%   | 140-150 | 0.3    | 0.1%    |
| 60-70 | 45.3   | 13.8%   | 150-160 | 0.2    | 0.1%    |
| 70-80 | 38.9   | 11.9%   | 160-170 | 0.1    | 0%      |
| 80-90 | 29.5   | 9.0%    | 170-180 | 0.0    | 0%      |

