



**Filename:** WS14935-WH-UNV - Chute

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL SCONCE

**Luminaire Cat:** Chute - WS14935 - WH - UNV

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.17AMP ; Vout = 12 - 40VDC , Iout = 350mA

**Ballast Cat:** Novbo - NE016277035 - 2GH

**Lamp Output:** Total luminaire Lumens: 874.3

**Max Candela:** 245.6 at Horizontal: 357.5°, Vertical: 90°

**Input Wattage:** 13.7

**Luminous Opening:** Circular (Dia: 1.97")

**Test:** 4369-26


**Test Date:** 31 July 2026

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

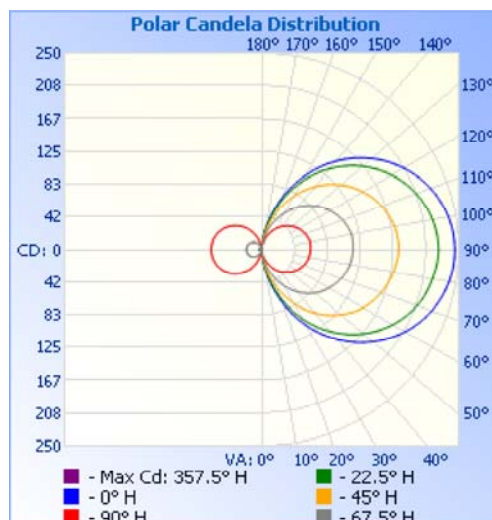

#### Zonal Lumen Summary

| Zone   | Lumens | % Luminaire |
|--------|--------|-------------|
| 0-30   | 21.8   | 2.5%        |
| 0-40   | 52.7   | 6%          |
| 0-60   | 166.9  | 19.1%       |
| 60-90  | 272.3  | 31.1%       |
| 70-100 | 289.8  | 33.2%       |
| 90-120 | 271.8  | 31.1%       |
| 0-90   | 439.2  | 50.2%       |
| 90-180 | 435.0  | 49.8%       |
| 0-180  | 874.3  | 100%        |

#### Lumens Per Zone

| Zone  | Lumens | % Total | Zone    | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10  | 0.7    | 0.1%    | 90-100  | 98.7   | 11.3%   |
| 10-20 | 5.3    | 0.6%    | 100-110 | 92.4   | 10.6%   |
| 20-30 | 15.8   | 1.8%    | 110-120 | 80.7   | 9.2%    |
| 30-40 | 30.9   | 3.5%    | 120-130 | 65.0   | 7.4%    |
| 40-50 | 48.3   | 5.5%    | 130-140 | 47.4   | 5.4%    |
| 50-60 | 65.9   | 7.5%    | 140-150 | 30.0   | 3.4%    |
| 60-70 | 81.2   | 9.3%    | 150-160 | 15.2   | 1.7%    |
| 70-80 | 92.5   | 10.6%   | 160-170 | 5.0    | 0.6%    |
| 80-90 | 98.6   | 11.3%   | 170-180 | 0.6    | 0.1%    |

