

# KUZCO LIGHTING | LED

**Filename:** WS36-027-BN - Tole

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL SCONCE

**Luminaire Cat:** WS36 - 027 - BN

**Lamp:** AC LED Module

**Lamp Cat:** AC LED Module

**Ballast Desc:** 120VAC , 50/60Hz

**Lamp Output:** Total luminaire Lumens: 2595.2

**Max Candela:** 512.6 at Horizontal: 5°, Vertical: 90°

**Input Wattage:** 29.8

**Luminous Opening:** Point

**Test:** 3079-25

**Test Date:** 12 February 2025

**Test Lab:** EVERFINE


**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff


## Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	49.7	1.9%
0-40	131.9	5.1%
0-60	457.4	17.6%
60-90	812.5	31.3%
70-100	875.7	33.7%
90-120	833.0	32.1%
0-90	1,269.9	48.9%
90-180	1,325.3	51.1%
0-180	2,595.2	100%

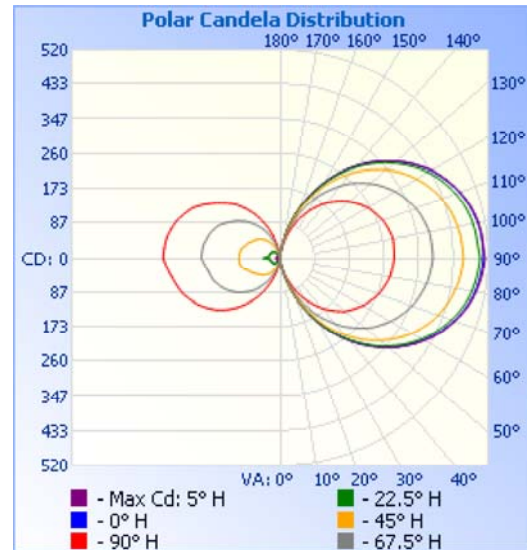

## Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	1.1	0.0%	90-100	301.7	11.6%
10-20	10.6	0.4%	100-110	283.3	10.9%
20-30	38.0	1.5%	110-120	248.0	9.6%
30-40	82.2	3.2%	120-130	199.8	7.7%
40-50	135.5	5.2%	130-140	144.6	5.6%
50-60	190.0	7.3%	140-150	90.0	3.5%
60-70	238.5	9.2%	150-160	43.4	1.7%
70-80	275.7	10.6%	160-170	13.0	0.5%
80-90	298.3	11.5%	170-180	1.4	0.1%

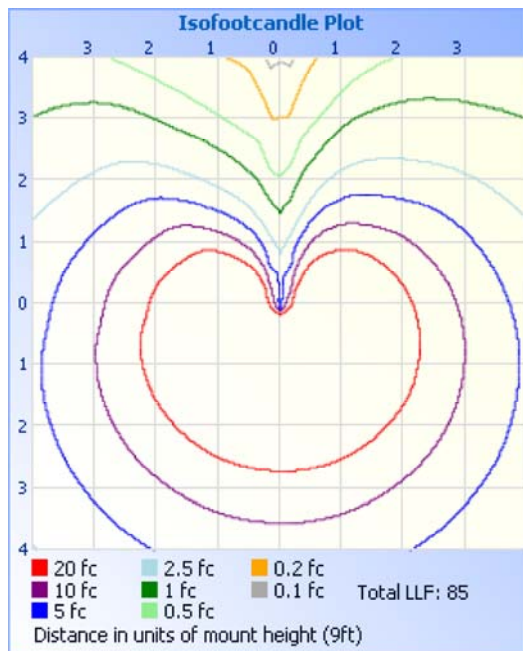

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	1.08 fc	4.1 ft
3.0ft	0.27 fc	8.3 ft
4.5ft	0.12 fc	12.4 ft
6.0ft	0.07 fc	16.5 ft
7.5ft	0.04 fc	20.6 ft
9.0ft	0.03 fc	24.8 ft

■ Beam Spread: 108.0°