



**Filename:** WS97204-BK\_CL - Stephord

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL SCONCE

**Luminaire Cat:** Stephord - WS97204 - BKCL

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.15AMP ; Vout = 12 - 42VDC , Iout = 130mA

**Ballast Cat:** Novbo - NE007277013 - 2GH

**Lamp Output:** Total luminaire Lumens: 213.6

**Max Candela:** 63.7 at Horizontal: 80°, Vertical: 30°

**Input Wattage:** 5.8

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3771--25


**Test Date:** 22 October 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

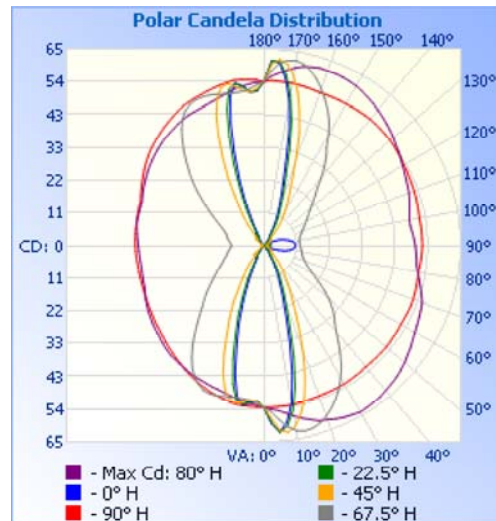

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	32.6	15.2%
0-40	45.8	21.4%
0-60	70.3	32.9%
60-90	35.9	16.8%
70-100	36.5	17.1%
90-120	36.3	17%
0-90	106.2	49.7%
90-180	107.4	50.3%
0-180	213.6	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	5.3	2.5%	90-100	12.3	5.8%
10-20	13.1	6.1%	100-110	12.1	5.6%
20-30	14.2	6.6%	110-120	11.9	5.6%
30-40	13.2	6.2%	120-130	12.3	5.7%
40-50	12.4	5.8%	130-140	12.7	5.9%
50-60	12.0	5.6%	140-150	13.4	6.3%
60-70	11.8	5.5%	150-160	14.3	6.7%
70-80	11.9	5.6%	160-170	13.1	6.2%
80-90	12.3	5.7%	170-180	5.3	2.5%

