

# KUZCO LIGHTING

## LUMINAIRE PHOTOMETRIC REPORT

**Filename:** WV339123VBCR - Sabre

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL MOUNT/WALL SCONCE

**Luminaire Cat:** WV339123VBCR

**Lamp:** DC LED

**Lamp Cat:** Unknown

**Ballast Desc:** I/P: 120VAC 0.16A 50/60Hz O/P: 27-42VDC 160mA

**Ballast Cat:** NE007040016-6G

**Lamp Output:** Total luminaire Lumens: 385.4

**Max Candela:** 89.7 at Horizontal: 322.5°, Vertical: 90°

**Input Wattage:** 7.3

**Luminous Opening:** Rectangle (L: 20.98", W: 4.02")

**Test:** 2106-23


**Test Date:** 10 March 2023

**Test Lab:** KUZCO LIGHTING

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

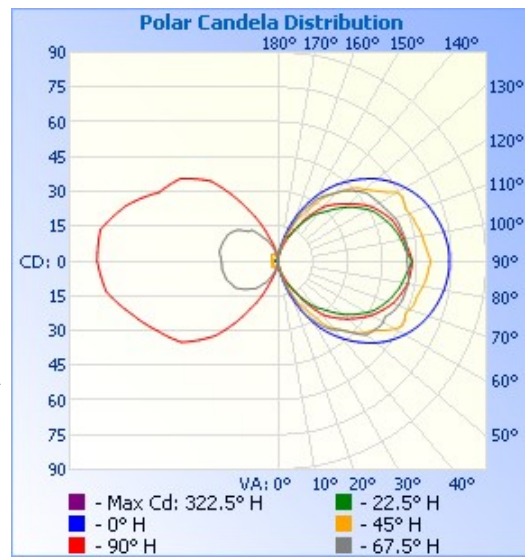

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	7.2	1.9%
0-40	19.3	5%
0-60	68.5	17.8%
60-90	123.3	32%
70-100	131.8	34.2%
90-120	123.7	32.1%
0-90	191.8	49.8%
90-180	193.6	50.2%
0-180	385.4	100%

### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	0.2	0.0%	90-100	45.0	11.7%
10-20	1.5	0.4%	100-110	42.1	10.9%
20-30	5.5	1.4%	110-120	36.6	9.5%
30-40	12.1	3.1%	120-130	29.2	7.6%
40-50	20.2	5.3%	130-140	20.6	5.3%
50-60	29.0	7.5%	140-150	12.4	3.2%
60-70	36.4	9.5%	150-160	5.8	1.5%
70-80	42.0	10.9%	160-170	1.7	0.4%
80-90	44.9	11.6%	170-180	0.2	0.1%

