




ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 525955BCG/GRN

KALCO
Handcrafted Since 1980

I M A G E

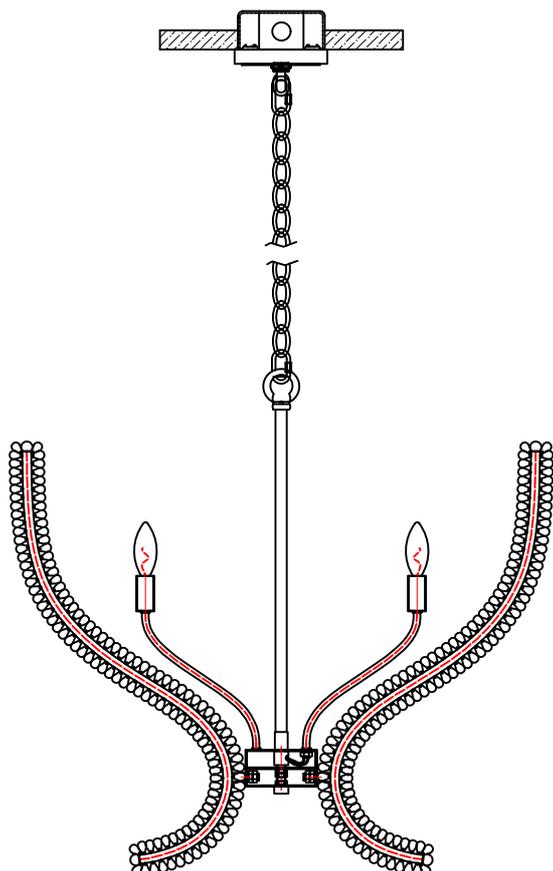

If you have any questions or problems assembling your fixture please call us for assistance.

Customer Service: (702) 361-4345 or (800) 525-2655

customer.service@kalco.com

WARNING! TO REDUCE THE RISK OF FIRE OR INJURY PLEASE TAKE PRECAUTION AND FOLLOW THE STEPS BELOW.

1. If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install fixture, make sure you have enough qualified help.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
3. DO NOT install bulb which exceeds the maximum wattage specified on the socket label.

Si vous avez des questions ou des problèmes assemblage de votre dispositif s'il vous plaît appel pour l'assistance.


Customer Service: (702) 361-4345 or (800) 525-2655

customer.service@kalco.com

AVERTISSEMENT! POUR RÉDUIRE LES RISQUES D'INCENDIE OU DE LESSURES S'IL VOUS PLAÎT PRENDRE DES PRÉCAUTIONS ET SUIVEZ LES ÉTAPES CI-DESSOUS.

1. Si vous n'êtes pas familier avec le câblage électrique, appelez un électricien qualifié pour installer cet appareil. Plus d'une personne peut être nécessaire d'installer appareil, assurez vous que vous disposez de l'aide assez qualifié.
2. Coupez l'alimentation au circuit de l'appareil sur le tableau de service. Utiliser un détecteur de tension pour vérifier que l'alimentation est coupée
3. NE PAS installer l'ampoule qui excède la puissance maximale indiquée sur l'étiquette du socket.

WIRING DIAGRAM

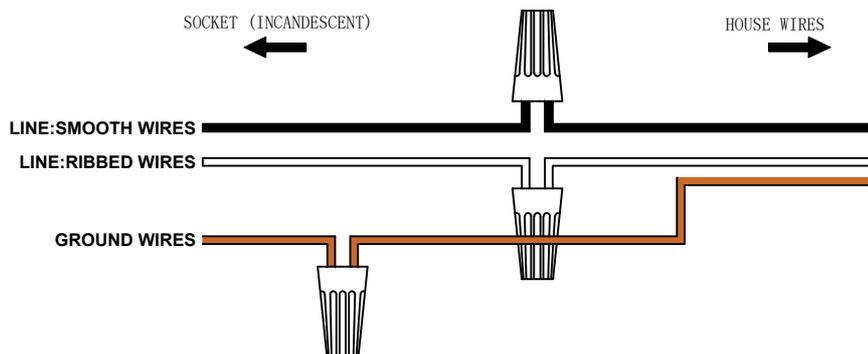



ASSEMBLY & INSTALLATION INSTRUCTIONS


MODEL: 525955BCG/GRN

KALCO
Handcrafted Since 1980

MOUNTING INSTRUCTIONS

STEP 1: Attach mounting plate to outlet box with the (2) 8/32"x 3/4" screws.

STEP 2.1: Adjust the desired height of the lamp body with the chain and pass through the lock ring with the wire.

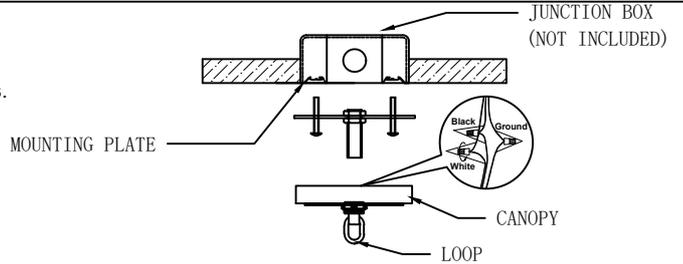


ELECTRICAL / COMPONENTS ASSEMBLY

STEP 2.2: Attach the chain and cable through canopy.

STEP 2.3: Attach cable through the canopy loop, and cable the open-able chain to the canopy loop, lace wires through the chain links (every other link).

STEP 3: Refer to wiring diagram. With wire carefully threaded thru canopy, connect the black supply wire to the smooth fixture wire with wire connector, connect the white supply wire to theribbed fixture wire with wire connector. Connect ground wire from fixture with supply ground wire.

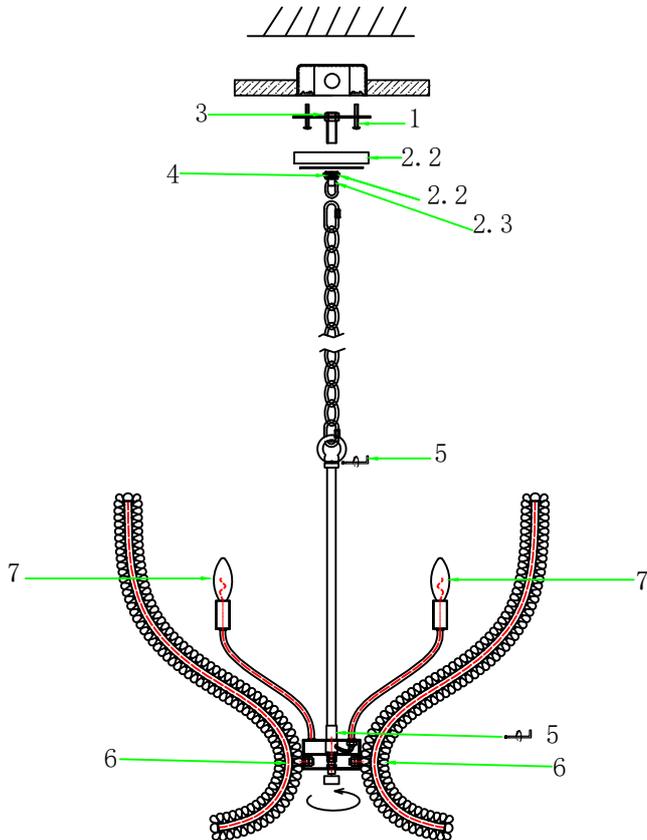

STEP 4: Tighten the canopy to mounting plate by canopy hoop ring.

STEP 5: Attach the metal thread tube to the main fixture and secure by small screws with Allen Key. (see accessories bag)

STEP 6: Attaching the glass arm

STEP 7: Install the E12 bulbs, don not use bulbs that exceed 40W.

LIGHTING MAINTENANCE:

- Regular cleaning of fixture with proper and gentle care using a soft duster, soft lint-free or damp cloth is recommended.
- Refrain from using harsh liquids that may cause chemical reaction on the hand painted finishes.
- Always refer to the Assembly Instruction before removing any components.
- **HANDLE WITH CARE.**



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 525955BCG/GRN

KALCO
Handcrafted Since 1980

PARTS LIST

IMAGE	PARTS NAME	QTY
	Canopy with chain (96")	1 PC/Set
	D16*500M Round metal tube	1 PC
	Chain	1 PCs
	Hanging ring	1 PCs
	Ø12*18mm glass bead	4192 PCs
	Ø20*H10MM Flat nut	1 PCs
	Ø16Round ball	16 PCs

