


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

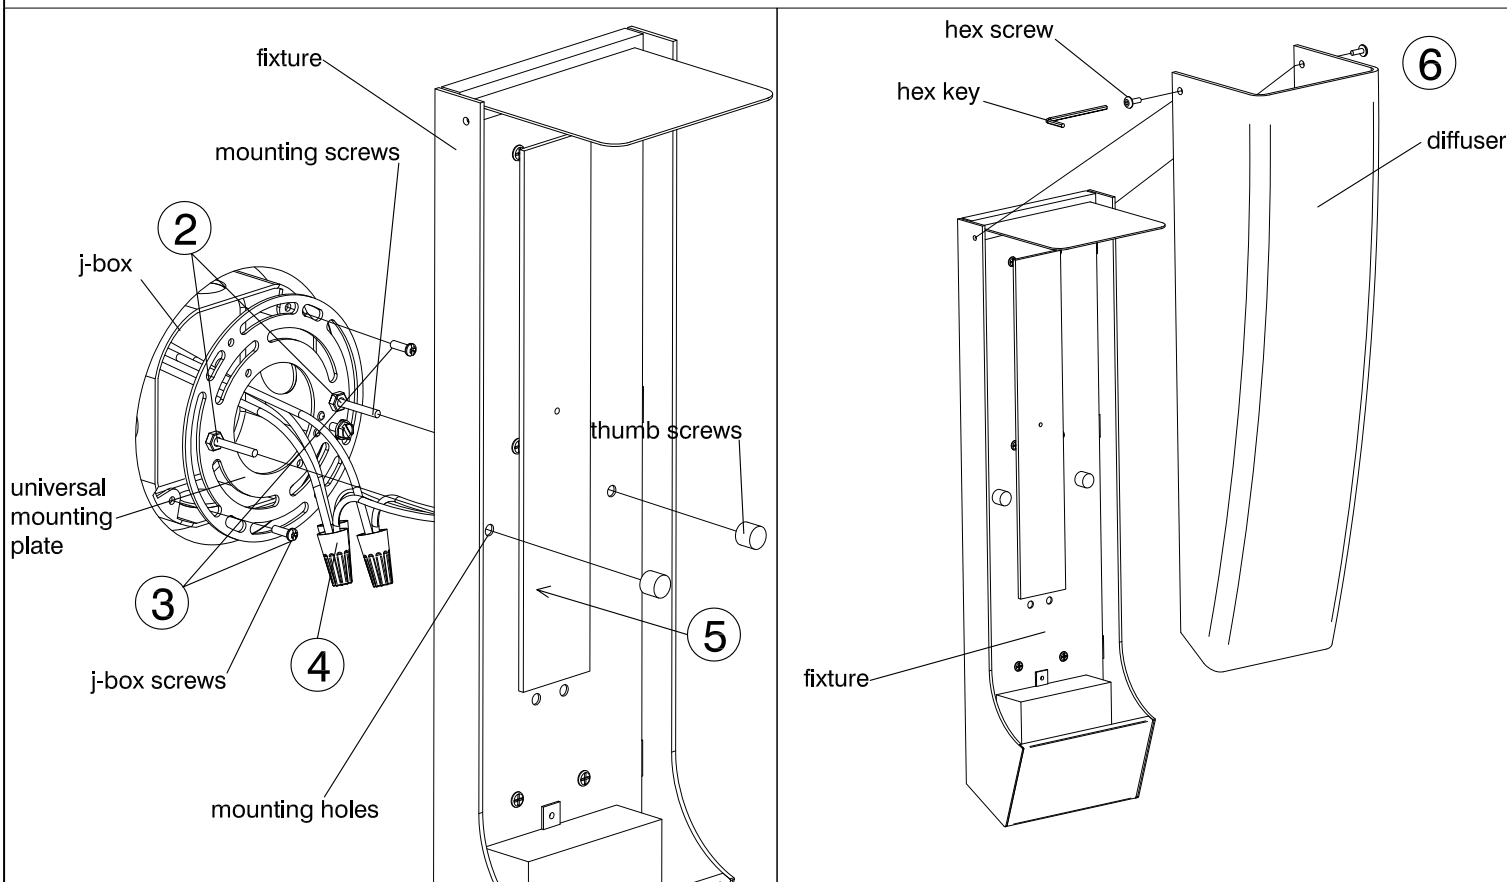

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clean surface. Take care not to lose any small parts necessary for installation.
2. The Universal Mounting Plate contains several pairs of threaded holes. Find the pair of holes that match the hole spacing in your fixture, and install the long mounting screws with nuts like shown.
3. Secure the universal mounting plate to the j-box with j-box screws keeping installed mounting screws horizontally level.
4. Make wire connections: Attach ground wire to building ground wire using a wire nut or attach them to the mounting plate with a green ground screw.
 - **FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Double check wiring. Tuck the wire connections neatly into the junction box.
 - **FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually. Wire positive wire with positive wire, negative wire with negative wire. Double check wiring. Tuck the wire connections neatly into the junction box.
5. Install the light fixture by guiding the fixtures mounting holes over the two screws from step two. Tighten thumb screws until the fixture is secure against wall.
6. Install the diffuser by placing bottom of diffuser inside fixture first then straighten. Install the two hex screws with the included hex key until snug.
7. Turn power back on at fuse or circuit box.

APOLLO sconce
120v **3-570-xx**
277v **37-570-xx**

OXYGEN LIGHTING ©

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

ASSEMBLY INSTRUCTIONS