


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirements.

## Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.
2. Remove fixture screw to release mounting plate. Thread building wires through mounting plate, then secure mounting plate with tapping screws and j-box screws.
3. Make wire connections.
  - Attach ground wire to the mounting plate with a green ground screw, then connect building ground wire using a wire nut.
  - Attach white wire (neutral) from driver to white wire from building using a wire nut.
  - Attach black wire (hot) from driver to black wire from building using a wire nut.Tuck the wire connections neatly into the junction box.
4. Place fixture over mounting plate and reinstall fixture screw to securely mount fixture to wall.
5. The wire lock automatically locks cable until the lock pressed to release the cable. To adjust the fixture hanging height, press in the wire lock to release cable cord to extend length. To shorten cable cord length, simply push the cable cord upward into the canopy.
6. Turn on the power at fuse or circuit box.

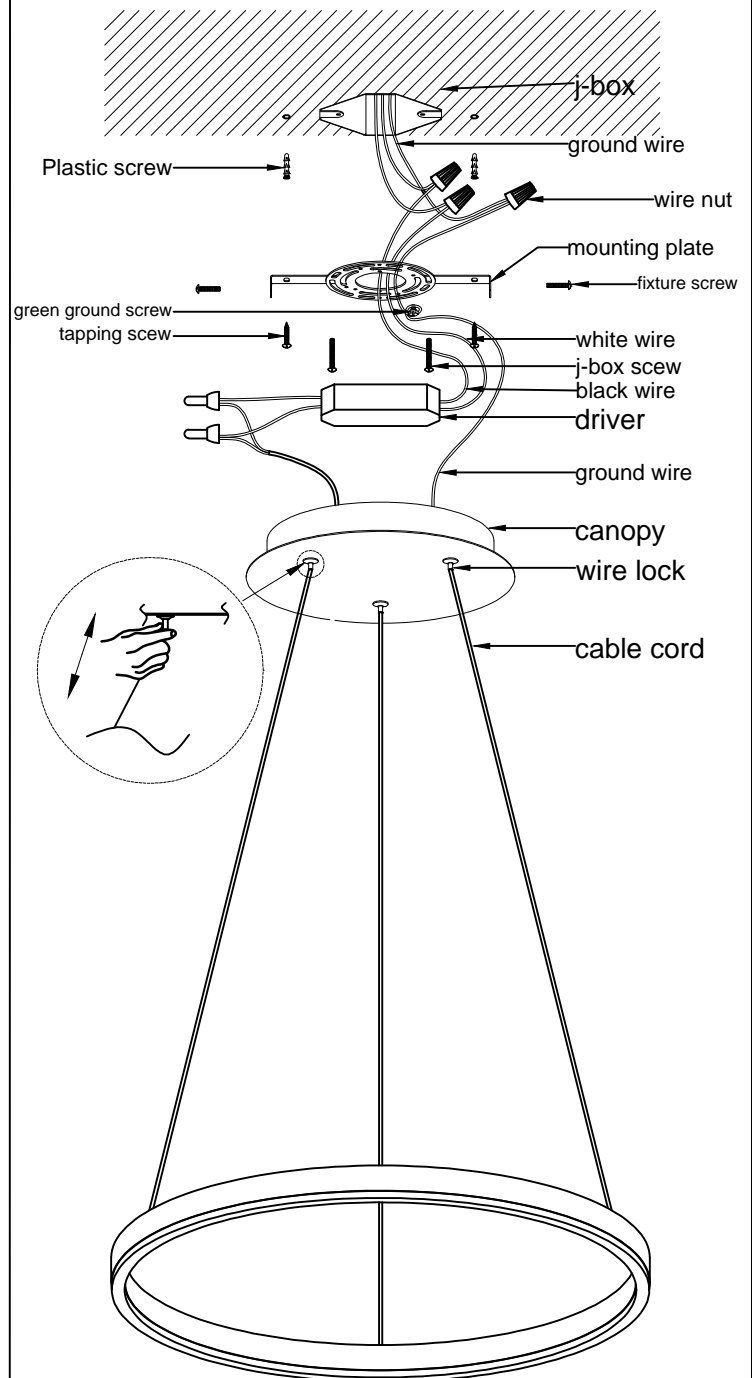

OXYGEN LIGHTING ©

**oxygen**

**CIRCULO Chandelier**

3-64-15 / 3-64-24 / 3-64-40/3-64-6  
3-65-15 / 3-65-24 / 3-65-40/3-65-6

ASSEMBLY  
INSTRUCTIONS