ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing,consult local electrical codes for wiring and grounding requirements.

Installation Steps

1.Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.

2.Choose the suitable stems that you need. Insert the fixture wire through the stems and connect them together. Connect the last stem to the coupling,swivel and canopy assembly.

3.Make wire connections. Refer to driver label for wire identification.

- Attach ground wire to the mounting plate with a green ground screw, then connect building ground wire using a wire nut.
- Attach white wire (neutral) from driver to white wire from building using a wire nut.
- Attach black wire (hot) from driver to black wire from building using a wire nut.

Tuck the wire connections neatly into the junction box.

- Attach low voltage red wire (positive) from driver to red wire from light with a wire nut.
- Attach low voltage black wire (negative) from driver to black wire from light with a wire nut.

Tuck the wire connections and driver neatly into the canopy.

4. Place fixture over mounting plate and reinstall fixture screw to securely mount fixture to ceiling.

5. Turn on the power at fuse or circuit box.

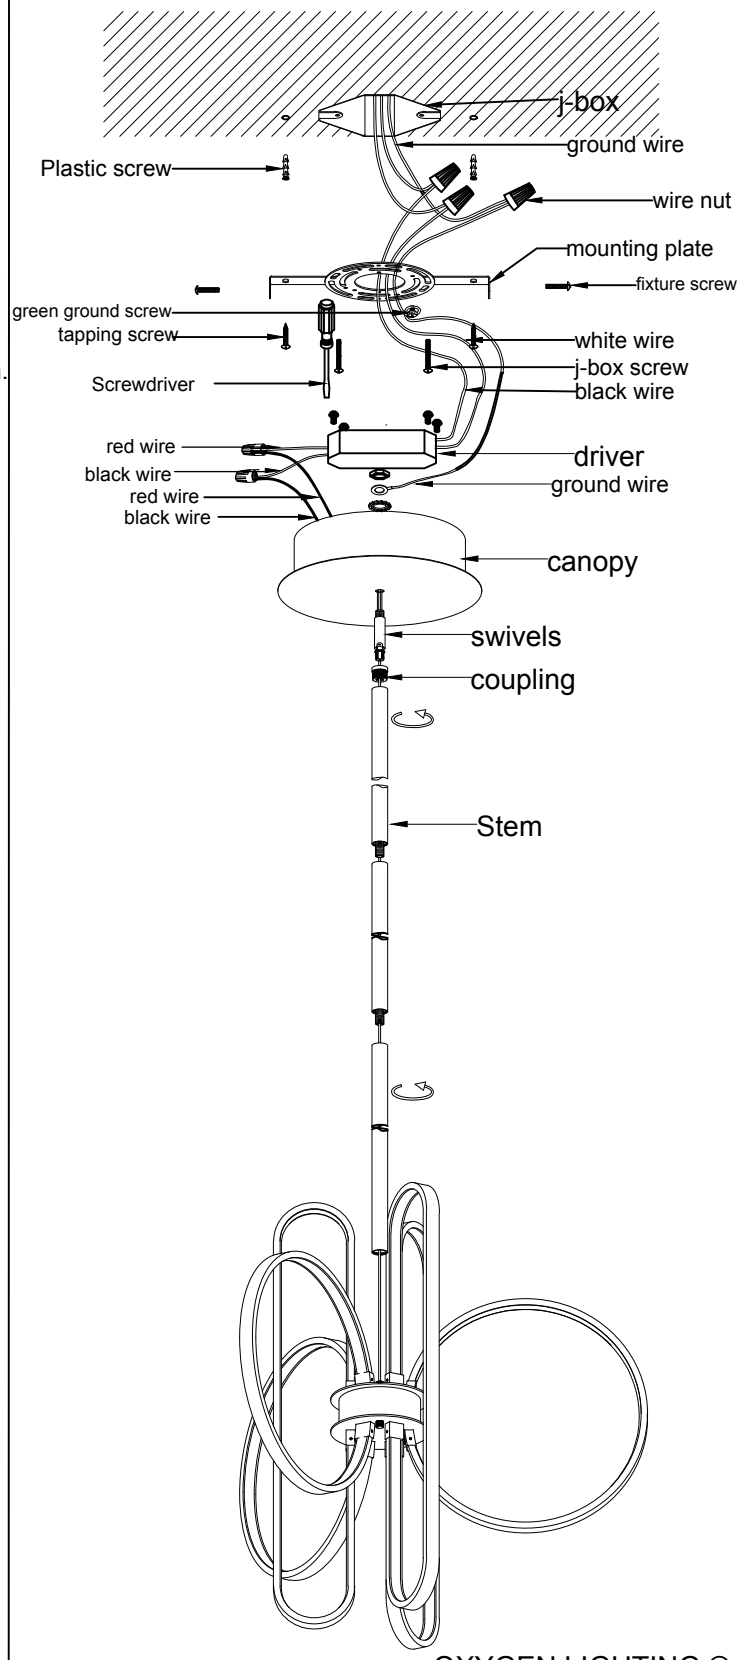

OXYGEN LIGHTING ©

oxygen

LUPE Chandelier

3-25-15

ASSEMBLY INSTRUCTIONS