


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

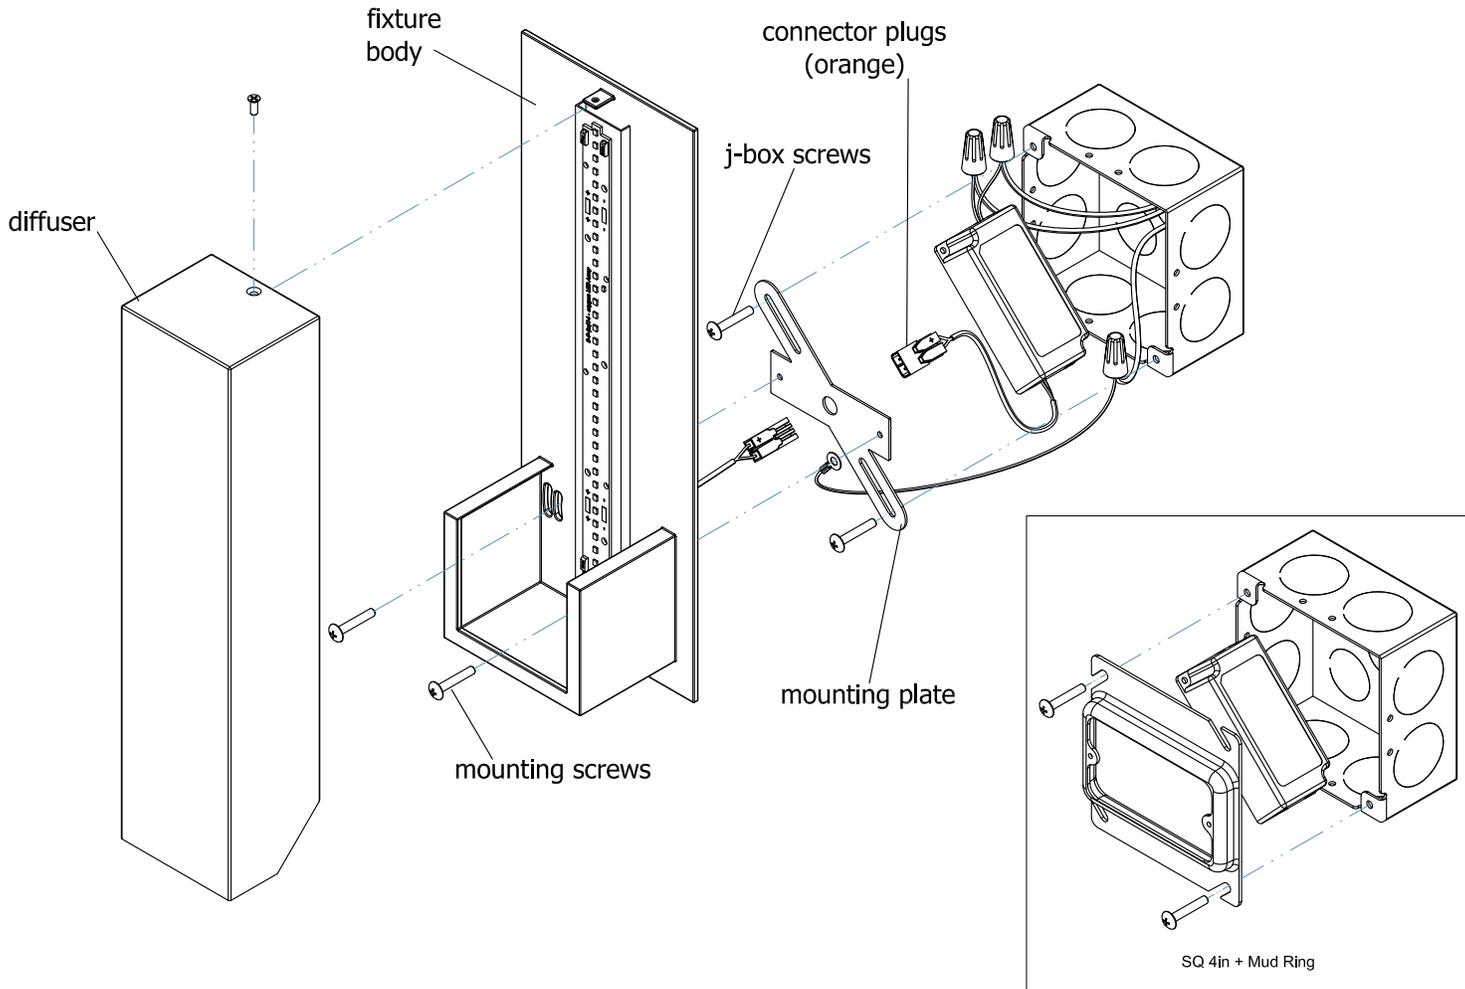

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.
2. Separate diffuser from fixture body by removing the screw on top of the diffuser and lifting the diffuser out of the fixture body. Note: If the diffuser is secured by clips, simply slide the diffuser straight up in order to remove it from the fixture body.
3. Make wire connections from j-box to driver:
Important: Leave the red and blue wires with orange connector on driver and building ground wire accessible.
 - **FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Double check wiring.
 - **FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually. Connect neutral wire (white) with neutral wire, hot wire (black) with hot wire. Double check wiring.
4. Tuck the wire connections and driver neatly into the junction box, leaving the orange connector accessible.
5. Install mounting plate to j-box with j-box screws. Feed the orange connector from the driver through the center hole in the mounting plate.
6. Connect orange connector from fixture to the orange connector from driver, and feed the connectors back into the junction box. Mount fixture body to the mounting plate with mounting screws. Fixture should be flat and secure against wall.
7. Reinstall diffuser.
8. Turn power back on at fuse or circuit box.

OXYGEN LIGHTING ©

ORION sconce
3-540-XX

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

ASSEMBLY INSTRUCTIONS