


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

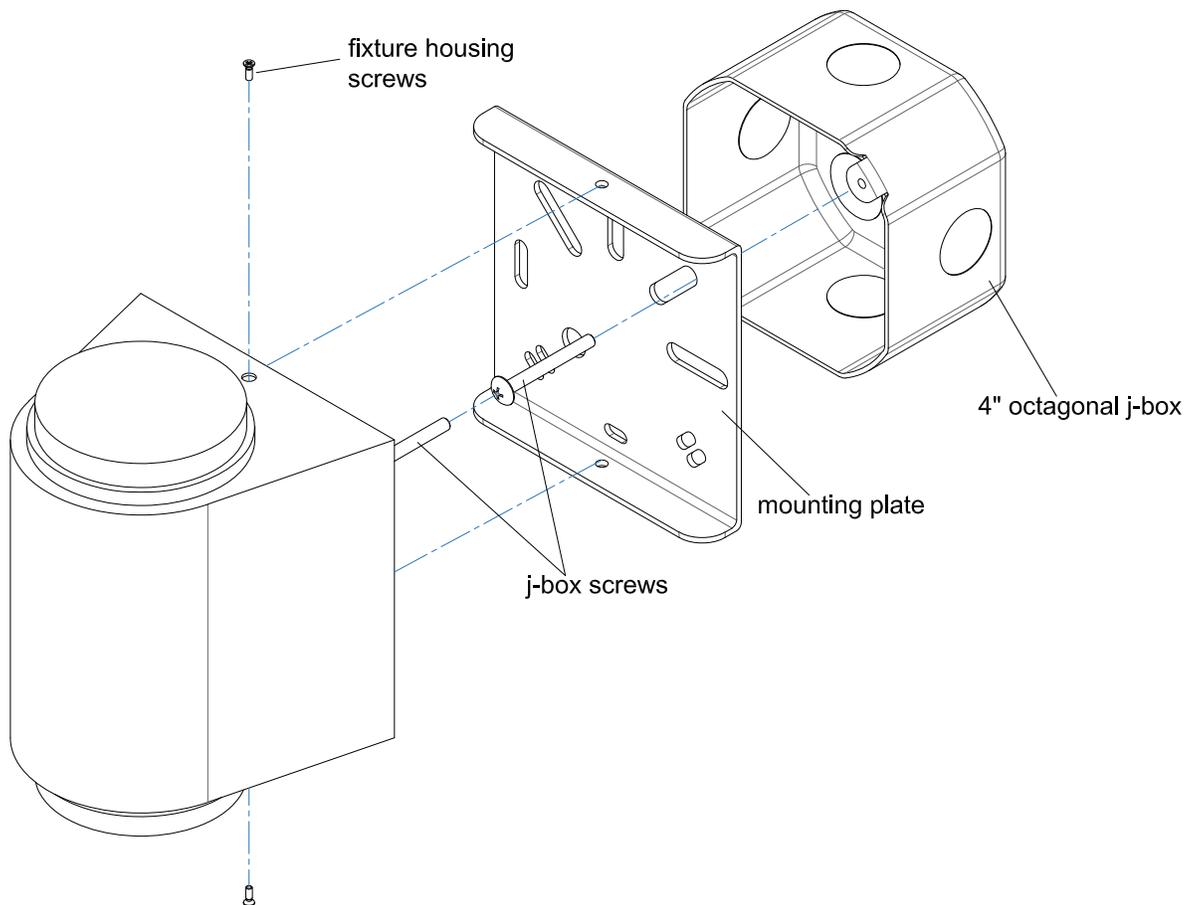

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation. Remove fixture screws to release mounting plate.
2. Install the mounting plate to the j-box with j-box screws.
3. Make wire connections. Attach ground wire to building ground wire using a wire nut.
 - **FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Double check wiring. Tuck the wire connections neatly into the junction box.
 - **FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually (if applicable) and proceed to step 4.
4. Connect neutral wire (white) from fixture with neutral wire from building, hot wire (black) from fixture with hot wire from building. Double check wiring. Carefully tuck wire connections neatly into the junction box.
5. Place fixture body over the mounting plate and secure it with the fixture screws provided. Fixture should be secure against the wall.
6. Where the fixture meets the mounting surface, caulk around the top, bottom and sides with suitable RTV or silicone compound to avoid water ingress.
7. Turn power back on at fuse or circuit box.

**RICO outdoor
3-764-XX**

OXYGEN LIGHTING ©

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

ASSEMBLY INSTRUCTIONS